

FLENDER COUPLINGS
CATALOG **FLE 10.3**
EDITION 2020 EN



HIGHLY FLEXIBLE COUPLINGS
ELPEX-B, ELPEX-S AND ELPEX

FLE 10 CATALOG GROUP



Product catalog FLE 10.1
Torsionally Rigid Couplings



Product catalog FLE 10.3
Highly Flexible Couplings



Product catalog FLE 10.2
Flexible Couplings



Product catalog FLE 10.4
Fluid Couplings

For further coupling catalogs, see page A/6

HIGHLY FLEXIBLE COUPLINGS



Catalog FLE 10.3 Edition 2020 EN

Introduction

Torsionally Rigid Gear Couplings

ZAPEX ZW

ZAPEX ZN

Torsionally Rigid All-Steel Couplings

N-ARPEX, ARPEX

Flexible Couplings

N-EUPEX

RUPEX

N-BIPEX

Highly Flexible Couplings

ELPEX-B

ELPEX-S

ELPEX

Fluid Couplings

FLUDEX

Appendix

E

4

5

6

7

8

9

10

11

12

13

A

INTRODUCTION

E

The mechanical drive train comprises individual units such as motor, gear unit and driven machine. The coupling connects these component assemblies.

As well as the transmission of rotary motion and torque, other requirements may be made of the coupling.

- Compensation for shaft misalignment with low restorative forces
- Control of characteristic angular vibration frequency and damping
- Interruption or limitation of torque
- Noise insulation, electrical insulation

Couplings are frequently chosen after the machines to be connected have already been selected. Thanks to a large number of different coupling assembly options, specified marginal conditions for clearance and connection geometry can be met from the standard range. The coupling also performs secondary functions, e.g. providing a brake disk or brake drum for operating or blocking brakes, devices to record speed or the attachment of sprockets or pulleys.

Couplings are divided into two main groups, couplings and clutches.


Clutches interrupt or limited the transmissible torque. The engaging and disengaging forces on externally operated clutches are introduced via a mechanically, electrically, hydraulically or pneumatically operating mechanism. Overload, centrifugal or freewheel clutches draw their engaging energy from the transmitted output.

Rigid couplings, designed as clamp, flanged or mechanism couplings, connect machines which must not undergo any shaft misalignment. Hydrodynamic couplings, often also called fluid or Föttinger couplings, are used as starting couplings in drives with high mass moments of inertia of the driven machine. In drive technology very often flexible, positive couplings, which may be designed to be torsionally rigid, torsionally flexible or highly flexible, are used.

Torsionally rigid couplings are designed to be rigid in a peripheral direction and flexible in radial and axial directions. The angle of rotation and torque are conducted through the coupling without a phase shift.

Torsionally flexible couplings have resilient elements usually manufactured from elastomer materials. Using an elastomer material with a suitable ShoreA hardness provides the most advantageous torsional stiffness and damping for the application. Shaft misalignment causes the resilient elements to deform.

Highly flexible couplings have large-volume (elastomer) resilient elements of low stiffness. The angle of rotation and torque are conducted through the coupling with a considerable phase shift.

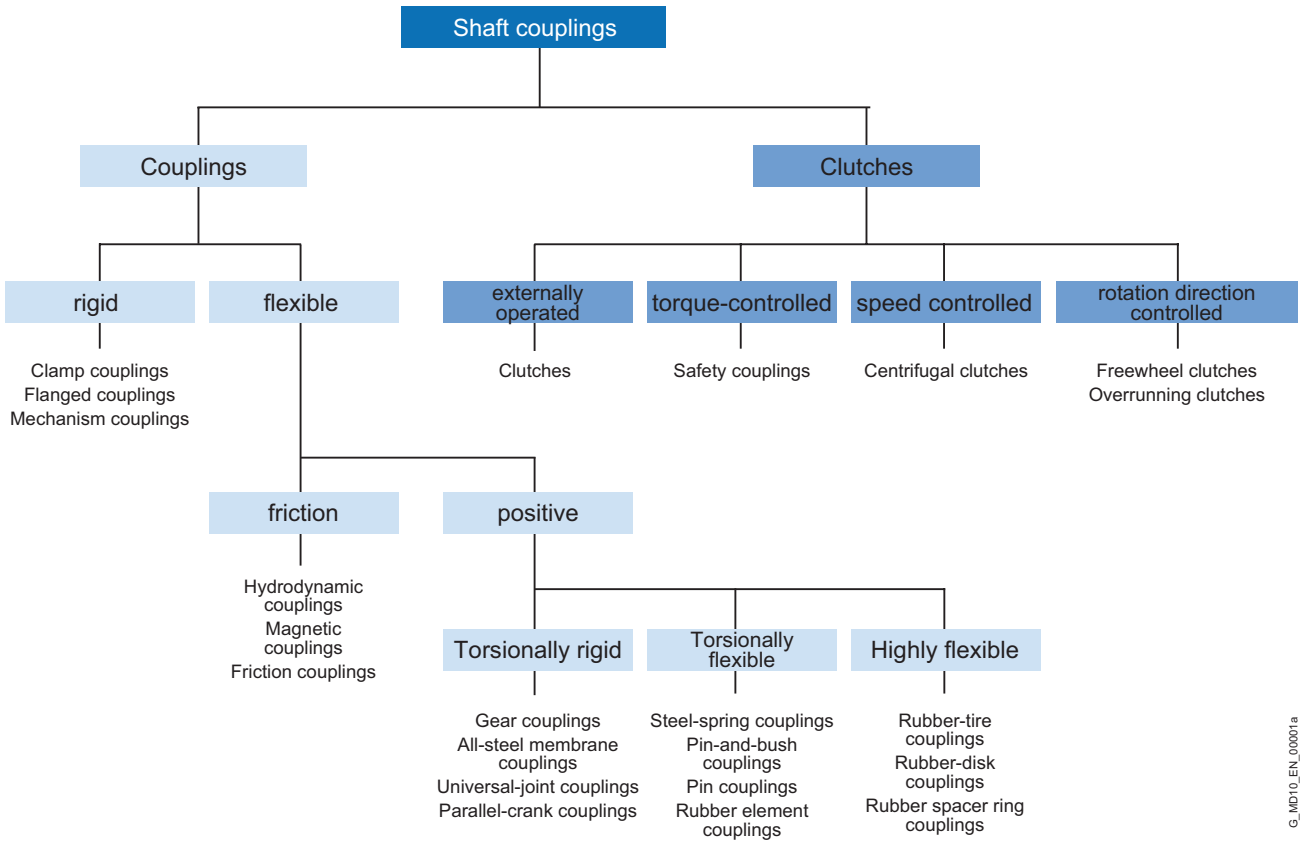

G_IMD10_EN_00001a


OUR COUPLING GROUPS AT A GLANCE

E


N-EUPEX, RUPEX and N-BIPEX

Flexible Couplings

Flexible Flender couplings have a wide range of possible applications. A broad standard modular system as well as specially designed application-specific couplings are available.



N-EUPEX
cam couplings
Rated torque:
19 Nm ... 62,000 Nm



RUPEX
pin-and-bush couplings
Rated torque:
200 Nm ... 1,300,000 Nm




N-BIPEX
cam couplings
Rated torque:
12 Nm ... 4,650 Nm

ELPEX, ELPEX-B and ELPEX-S

Highly Flexible Couplings

ELPEX® couplings are free of circumferential back-lash. Their damping capacity and low torsional stiff-ness make them especially well-suited for coupling machines with strongly non-uniform torque characteristics or large shaft misalignment.



ELPEX
elastic ring couplings
Rated torque:
1,600 Nm ... 90,000 Nm



ELPEX-B
elastic tire couplings
Rated torque:
24 Nm ... 14,500 Nm




ELPEX-S
rubber disk couplings
Rated torque:
330 Nm ... 63,000 Nm

ZAPEX gear couplings and ARPEX all-steel couplings

Torsionally rigid couplings

For transmission of high torques, we offer both ARPEX all-steel couplings and ZAPEX gear couplings in a range of versions. Their purposes of application vary according to specific requirements with respect to shaft misalignment, temperature and torque.



ZAPEX
gear couplings
Rated torque:
1,300 Nm ... 7,200,000 Nm



ARPEX
high Performance Couplings
Rated torque:
1,000 Nm ... 588,500 Nm




N-ARPEX and ARPEX
all-steel couplings
Rated torque:
92 Nm ... 2,000,000 Nm

BIPEX-S and SIPEX

Backlash-free couplings

The vibration-damping, electrically insulating plug-in BIPEX-S elastomer couplings and SIPEX metal bellows couplings with very high torsional stiffness deliver especially isogonal torque transmission.



BIPEX-S and SIPEX
Rated torque:
0.1 Nm ... 5,000 Nm

FLUDEX

Hydrodynamic couplings


The FLUDEX hydrodynamic fluid coupling works according to the Föttinger principle. It functions entirely free of wear.



FLUDEX
fluid Couplings
Power:
1.2 kW ... 2,500 kW


Application-specific couplings

Couplings for rail vehicles must meet high demands. Due to their high degree of standardization and wide variety, they can be used in the most diverse vehicle types.



Railway coupling
Rated torque:
1,000 Nm ... 9,500 Nm

Each wind turbine coupling is designed to optimally meet the requirements of the respective wind turbine. The coupling connects the fast-running gear shaft with the generator shaft and is available for wind turbines with a capacity of up to 12 MW.



Wind turbine couplings
Rated torque:
10,000 Nm ... 60,000 Nm

TECHNICAL INFORMATION AND COUPLING SELECTION

E

| | |
|---|-------------|
| Technical Information | E/8 |
| Shaft misalignment | E/8 |
| Balancing | E/9 |
| Shaft-hub connections | E/11 |
| Standards | E/12 |
| Key to symbols | E/13 |
| <hr/> | |
| Selection of the coupling series | E/14 |
| Typical coupling solutions for different example applications | E/15 |
| <hr/> | |
| Selection of the coupling size | E/16 |
| Coupling load in continuous operation | E/16 |
| Coupling load at maximum and overload conditions | E/17 |
| Coupling load due to dynamic torque load | E/17 |
| Checking the maximum speed | E/18 |
| Checking permitted shaft misalignment | E/18 |
| Checking bore diameter, mounting geometry and coupling design | E/18 |
| Coupling behavior under overload conditions | E/18 |
| Checking shaft-hub connection | E/18 |
| Checking low temperature and chemically aggressive environment | E/18 |
| <hr/> | |
| Features of the standard type | E/19 |
| <hr/> | |

TECHNICAL INFORMATION


E

Shaft misalignment


Shaft misalignment is the result of displacement during assembly and operation and, where machines constructed with two radial bearings each are rigidly coupled, will cause high loads being placed on the bearings. Elastic deformation of base frame, foundation and machine housing will lead to shaft misalignment which cannot be prevented, even by precise alignment.

Furthermore, because individual components of the drive train heat up differently during operation, heat expansion of the machine housings causes shaft misalignment. Poorly aligned drives are often the cause of seal, rolling bearing or coupling failure. Alignment should be carried out by specialist personnel in accordance with operating instructions.


Depending on the direction of the effective shaft misalignment a distinction is made between:



Axial misalignment



Radial misalignment



Angular misalignment


Couplings can be categorized into one of the following groups:

Single-joint couplings

Couplings with flexible elements mainly made of elastomer materials. Shaft misalignment results in deformation of the elastomer elements. The elastomer elements can absorb shaft misalignment as deformations in an axial, radial and angular direction. The degree of permissible misalignment depends on the coupling size, the speed and the type of elastomer element. Single-joint couplings do not require an adapter and are therefore short versions.

Example:

In the case of a RUPLEX RWN 198 coupling with an outer diameter of 198 mm and a speed of 1500 rpm, the permitted radial misalignment is $\Delta K_r = 0.3$ mm.




Two-joint couplings

Two-joint couplings are always designed with an adapter. The two joint levels are able to absorb axial and angular misalignment. Radial misalignment occurs via the gap between the two joint levels and the angular displacement of the joint levels. The permitted angular misalignment per joint level is frequently about 0.5°. The permitted shaft misalignment of the coupling can be adjusted via the length of the adapter. If there are more than two joint levels, it is not possible to define the position of the coupling parts relative to the axis of rotation. (The less frequently used parallel-crank couplings are an exception).

Example:

N-ARPEX ARN-6 NEN 217-6 with a shaft distance of 140 mm with a permitted radial misalignment of $\Delta K_r = 2.2$ mm [angle per joint level 1.0°].

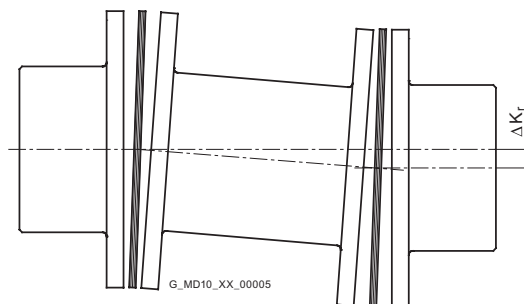

Balancing

Balance quality levels

The so-called quality level G to DIN ISO 21940 indicates a range of permitted residual imbalance from zero up to an upper limit. Applications can be grouped on the basis of similarity analysis. For many applications a coupling balance quality of G 16 is sufficient. On drives susceptible to vibration the balance quality should be G 6.3. Only in special cases is a better balance quality required.

Balancing standard in accordance with DIN ISO 21940-32

Besides the required balance quality, it is necessary to set standards which define how the mass of the parallel key is to be taken into consideration when balancing. In the past, motor rotors have frequently been balanced in accordance with the full parallel key standard. The "appropriate" balance condition of the coupling hub was described as "balancing with open keyway" or "balancing after keyseating". Today it is usual for the motor rotor, as well as the gear unit and driven machine shaft, to be balanced in accordance with the half parallel key standard.

Full parallel key standard

The parallel key is inserted in the shaft keyway, then balancing is carried out. The coupling hub must be balanced without parallel key after keyseating.

Marking of shaft and hub with "F" (for "full").

Half parallel key standard

The balancing standard normally applied today. Before balancing, a half parallel key is inserted in the shaft and another in the coupling hub. Alternatively, balancing can be carried out before cutting the keyway.

The balanced parts must be marked with an "H". This marking can be dispensed with if it is absolutely clear which parallel key standard has been applied.

No parallel key standard

Balancing of shaft and coupling hub after keyseating, but without parallel key. Not used in practice. Marking of shaft and hub with "N" (for "no").
The length of the parallel key is determined by the shaft keyway. Coupling hubs may be designed considerably shorter than the shaft.

To prevent imbalance forces caused by projecting parallel key factors when balancing in accordance with the half parallel key standard in the case of applications with high balancing quality requirements, grooved spacer rings can be fitted or stepped parallel keys used.

Flender Balancing Standard

The balancing quality level, together with the operating speed, results in the maximum permissible eccentricity of the center of gravity of the coupling or the coupling subassembly. In the Flender article number the balancing quality can be preset with the help of the order code. Additionally, also the balance quality level to DIN ISO 21940 can be preset together with the operating speed belonging to it, which then be taken as priority.

$$e_{perm} = 9550 \cdot \frac{G}{n}$$


$$e_{coupl} \leq e_{perm}$$

Permitted eccentricity of center of gravity e_{perm} in μm
 Eccentricity of center of gravity of coupling e_{coupl} in μm
 Balancing quality level G in mm/s
 Coupling speed n in rpm

| Eccentricity of center of gravity of coupling e_{coupl} | Flender balancing quality | Order code |
|---|---------------------------|-----------------------|
| maximum 100 μm | standard balancing | without specification |
| maximum 40 μm | fine balancing | W02 |
| maximum 16 μm | micro-balancing | W03 |
| better than 16 μm | special balancing | on request |

TECHNICAL INFORMATION

E

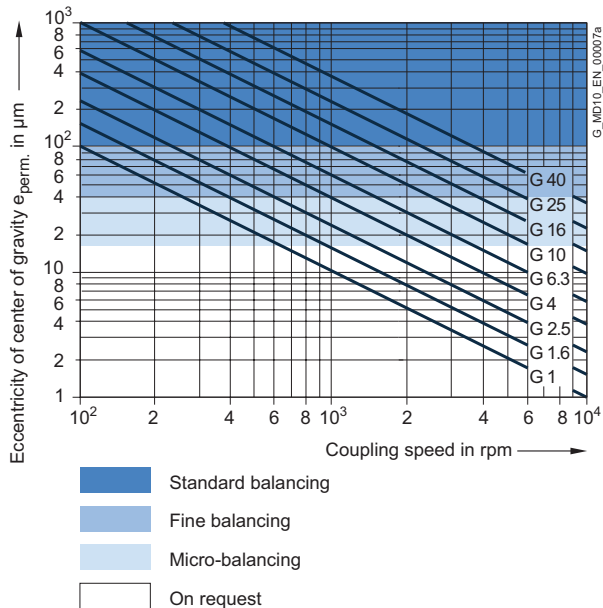

Example:
Coupling speed = 1450 rpm
required balancing quality level G 6.3

$$e_{perm} = 9550 \cdot \frac{G}{n} = 9550 \cdot \frac{6.3}{1450} \mu\text{m}$$

Thus, the required eccentricity of center of gravity is 41.5 µm. The fine balancing with a maximum eccentricity of center of gravity of 40 mm fulfills this requirement; therefore, the order code W02 has to be specified when ordering.

For many applications the following balancing quality recommendation applies:

| Coupling | standard balancing $v = DA \cdot n/19100$ | fine balancing |
|--|--|----------------------|
| short version with $LG \leq 3 \times DA$ | $v < 30 \text{ m/s}$ | $v > 30 \text{ m/s}$ |
| long version with $LG > 3 \times DA$ | $v \leq 15 \text{ m/s}$ | $v > 15 \text{ m/s}$ |

| | | |
|-------------------------|-----|---------|
| Peripheral speed | v | in mm/s |
| Coupling outer diameter | DA | in mm |
| Coupling speed | n | in rpm |
| Coupling length | LG | in mm |

The following standards on balancing must be observed:

- couplings are balanced in subassemblies.
- hub parts without finished bore are unbalanced.
- the number of balancing levels (one- or two-level balancing) is specified by Flender.
- without special specification balancing is done in accordance with the half-parallel-key standard. Balancing in accordance with the full-parallel-key standard must be specified in the order number.
- For FLUDEX couplings special balancing standards specified in Section 13 apply.
- ARPEX couplings in standard balancing quality are unbalanced. Thanks to steel components machined all over and precisely guided adapters the balancing quality of standard balancing is nearly always adhered to.

Shaft-hub connections

The bore and the shaft-hub connection of the coupling are determined by the design of the machine shaft. In the case of IEC standard motors, the shaft diameters and parallel key connections are specified in accordance with DIN EN 50347. For diesel motors, the flywheel connections are frequently specified in accordance with SAE J620d or DIN 6288. Besides the very widely used connection of shaft and hub with parallel keys to DIN 6885 and cylindrically bored hubs, couplings with Taper clamping bushes, clamping sets, shrink-fit connections and splines to DIN 5480 are common.

The form stability of the shaft/hub connection can only be demonstrated when shaft dimensions and details of the connection are available. The coupling torques specified in the tables of power ratings of the coupling series do not apply to the shaft-hub connection unrestrictedly.

In the case of the shaft-hub connection with parallel key, the coupling hub must be axially secured, e.g. with a set screw or end washer. The parallel key must be secured against axial displacement in the machine shaft.

All Flender couplings with a finished bore and parallel keyway are designed with a set screw. Exceptions are some couplings of the FLUDEX series, in which end washers are used. During assembly, Taper clamping bushes are frictionally connected to the machine shaft.

TECHNICAL INFORMATION

E

Standards

Machines

| | |
|-----------------|---|
| 2006/42/EG | EC Machinery Directive |
| 2014/34/EU | ATEX Directive – Manufacturer |
| 1999/92/EG | ATEX Directive – Operator – and ATEX Guideline to Directive 1999/92/EC |
| DIN EN 80079-36 | Non-electrical equipment for use in potentially explosive atmospheres |
| DIN EN 1127 | Explosive atmospheres, explosion prevention and protection |
| DIN EN 50347 | General-purpose three-phase induction motors having standard dimensions and outputs |

Couplings

| | |
|--------------------|---|
| DIN 740 | Flexible shaft couplings Part 1 and Part 2 |
| VDI Guideline 2240 | Shaft couplings - Systematic subdivision according to their properties VDI Technical Group Engineering Design 1971 |
| API 610 | Centrifugal Pumps for Petroleum, Chemical and Gas Industry Services |
| API 671 | Special Purpose Couplings for Petroleum, Chemical and Gas Industry Services |
| ISO 10441 | Petroleum, petrochemical and natural gas industries – Flexible couplings for mechanical power transmission-special-purpose applications |
| ISO 13709 | Centrifugal pumps for petroleum, petrochemical and natural gas industries |

Balancing

| | |
|------------------|---|
| DIN ISO 21940 | Requirements for the balancing quality of rigid rotors |
| DIN ISO 21940-32 | Mechanical vibrations; standard governing the type of parallel key during balancing of shafts and composite parts |

Shaft-hub connections

| | |
|--------------|---|
| DIN 6885 | Driver connections without taper action – parallel keys – keyways |
| SAE J620d | Flywheels for industrial engines ... |
| DIN 6288 | Reciprocating internal combustion engines Dimensions and requirements for flywheels and flexible couplings |
| ASME B17.1 | Keys and keyseats |
| DIN EN 50347 | General-purpose three-phase induction motors with standard dimensions and output data |
| BS 46-1:1958 | Keys and keyways and taper pins Specification |

Key to symbols

| Name | Symbols | Unit | Explanation |
|------------------------------|--------------|------------------|---|
| Torsional stiffness, dynamic | C_{Tdyn} | Nm/rad | For calculating torsional vibration |
| Excitation frequency | f_{err} | Hz | Excitation frequency of motor or driven machine |
| Moment of inertia | J | kgm ² | Moment of inertia of coupling sides 1 and 2 |
| Axial misalignment | ΔK_a | mm | Axial misalignment of the coupling halves |
| Radial misalignment | ΔK_r | mm | Radial misalignment of the coupling halves |
| Angular misalignment | ΔK_w | ° | Angular misalignment of the coupling halves |
| Service factor | FB | | Factor expressing the real coupling load as a ratio of the nominal coupling load |
| Frequency factor | FF | | Factor expressing the frequency dependence of the fatigue torque load |
| Temperature factor | FT | | Factor taking into account the reduction in strength of flexible rubber materials at a higher temperature |
| Weight | m | kg | Weight of the coupling |
| Rated speed | n_N | rpm | Coupling speed |
| Maximum coupling speed | n_{Kmax} | rpm | Maximum permissible coupling speed |
| Rated power | P_N | kW | Rated output on the coupling, usually the output of the driven machine |
| Rated torque | T_N | Nm | Rated torque as nominal load on the coupling |
| Fatigue torque | T_W | Nm | Amplitude of the dynamic coupling load |
| Maximum torque | T_{max} | Nm | More frequently occurring maximum load, e.g. during starting |
| Overload torque | T_{OL} | Nm | Very infrequently occurring maximum load, e.g. during short circuit or blocking conditions |
| Rated coupling torque | T_{KN} | Nm | Torque which can be transmitted as static torque by the coupling over the period of use. |
| Maximum coupling torque | T_{Kmax} | Nm | Torque which can be frequently transmitted (up to 25 times an hour) as maximum torque by the coupling. |
| Coupling overload torque | T_{KOL} | Nm | Torque which can very infrequently be transmitted as maximum torque by the coupling. |
| Fatigue coupling torque | T_{KW} | Nm | Torque amplitude which can be transmitted by the coupling as dynamic torque at a frequency of 10 Hz over the period of use. |
| Resonance factor | V_R | | Factor specifying the torque increase at resonance |
| Temperature | T_a | °C | Ambient temperature of the coupling in operation |
| Damping coefficient | Ψ | psi | Damping parameter |

SELECTION OF THE COUPLING SERIES

E

The coupling series is frequently determined by the driven machine and the design of the drive train. Common selection criteria are listed below and assigned to coupling properties, which are used to select the coupling series. Additionally, the price of the coupling and availability are important criteria for determining the coupling series to be used.

The **FLUDEX series** operates positively and transmits the torque with the aid of a flowing oil or water filling.

FLUDEX couplings are used to reduce starting and/or overload torques. During starting, the motor may, for example, run up within a very short time; because of the FLUDEX coupling, the drive train with the driven machine may accelerate after a delay and without increased torque load.

The FLUDEX coupling cannot compensate for shaft misalignment and is therefore designed in combination with a displacement coupling, a cardan shaft or a belt drive. The displacement coupling may be selected in accordance with the criteria described below.

| Selection criteria | Torque range | Speed range | Torsional stiffness | | Highly flexible | Operating temperature range |
|--------------------|-----------------------------------|--|---------------------|----------------------|-----------------|-----------------------------|
| | Rated coupling torque T_{KN} | Peripheral speed $v_{max} = DA \cdot n_{max}/19100$ | torsionally rigid | torsionally flexible | | |
| ZAPEX | 850 ... 7200000 Nm | 60 m/s | ■ | - | - | -20 ... +80 °C |
| N-ARPEX | 350 ... 2000000 Nm | 110 m/s | ■ | - | - | -50 ... +280 °C |
| ARPEX | 92 ... 2000000 Nm | 100 m/s | ■ | - | - | -40 ... +280 °C |
| N-EUPEX | 19 ... 62000 Nm | 36 m/s | - | ■ | - | -50 ... +100 °C |
| N-EUPEX DS | 19 ... 21200 Nm | 36 m/s | - | ■ | - | -30 ... +80 °C |
| RUPEX | 200 ... 1300000 Nm | 60 m/s | - | ■ | - | -50 ... +100 °C |
| N-BIPEX | 12 ... 4650 Nm | 45 m/s | - | ■ | - | -50 ... +100 °C |
| ELPEX-B | 24 ... 14500 Nm | 35 m/s | - | - | ■ | -50 ... +70 °C |
| ELPEX-S | 330 ... 63000 Nm | 66 m/s | - | - | ■ | -40 ... +120 °C |
| ELPEX | 1600 ... 900000 Nm | 60 m/s | - | - | ■ | -40 ... +80 °C |

Typical coupling solutions for different example applications

The specified application factors are recommendations; regulations, rules and practical experience take priority as assessment criteria.

No application factor need be taken into account with FLUDEX couplings.

In the case of highly flexible couplings of the ELPEX, ELPEX-S and ELPEX-B series, deviating application factors are stated in the product descriptions.

FLUDEX couplings are mostly mounted on the high-speed gear shaft.

| Example applications | Application factor FB |
|---|-----------------------|
| Electric motor without gear unit | |
| Centrifugal pumps | 1.0 |
| Piston pumps | 1.5 |
| Vacuum pumps | 1.5 |
| Fans with T_N less than 75 Nm | 1.5 |
| Fans with T_N from 75 to 750 Nm | 1.75 |
| Fans with T_N larger than 750 Nm | 1.75 |
| Blowers | 1.5 |
| Frequency converters / generators | 1.25 |
| Reciprocating compressors | 1.75 |
| Screw-type compressors | 1.5 |
| Internal-combustion engine without gear unit | |
| Generators | 1.75 |
| Pumps | 1.5 |
| Fans | 1.75 |
| Hydraulic pumps, excavators, construction machines | 1.5 |
| Compressors / screw-type compressors | 1.5 |
| Agricultural machinery | 1.75 |
| Other | |
| Turbine gear units | 1.5 |
| Hydraulic motor - gear unit | 1.25 |
| Electric motor with gear unit | |
| Chemical industry | |
| Extruders | 1.5 |
| Pumps - centrifugal pumps | 1.0 |
| Pumps - piston pumps | 1.75 |
| Pumps - plunger pumps | 1.5 |
| Reciprocating compressors | 1.75 |
| Calenders | 1.5 |
| Kneaders | 1.75 |
| Cooling drums | 1.25 |
| Mixers | 1.25 |
| Stirrers | 1.25 |
| Toasters | 1.25 |
| Drying drums | 1.25 |
| Centrifuges | 1.25 |
| Crushers | 1.5 |
| Power generation and conversion | |
| Compressed air, reciprocating compressors | 1.75 |

| Example applications | Application factor FB |
|---|-----------------------|
| Compressed air, screw-type compressors | 1.25 |
| Air - Blowers | 1.5 |
| Air - Cooling tower fans | 1.5 |
| Air - Turbine blowers | 1.5 |
| Generators, converters | 1.25 |
| Welding generators | 1.25 |
| Metal production, iron and steel works | |
| Plate tilters | 1.5 |
| Ingot pushers | 1.75 |
| Slabbing mill | 1.75 |
| Coiling machines | 1.5 |
| Roller straightening machines | 1.5 |
| Roller tables | 1.75 |
| Shears | 1.75 |
| Rollers | 1.75 |
| Metal working machines | |
| Plate bending machines | 1.5 |
| Plate straightening machines | 1.5 |
| Hammers | 1.75 |
| Planing machines | 1.75 |
| Presses, forging presses | 1.75 |
| Shears | 1.5 |
| Grinding machines | 1.25 |
| Punches | 1.5 |
| Machine tools: Main drives | 1.5 |
| Machine tools: Auxiliary drives | 1.25 |
| Food industry | |
| Filling machines | 1.25 |
| Kneading machines | 1.5 |
| Mashers | 1.5 |
| Sugar cane production | 1.5 |
| Production machines | |
| Construction machines, hydraulic pumps | 1.25 |
| Construction machines, traversing gears | 1.5 |
| Construction machines, suction pumps | 1.5 |
| Construction machines, concrete mixers | 1.5 |
| Printing machines | 1.25 |
| Woodworking - barking drums | 1.5 |
| Woodworking - planing machines | 1.5 |

| Example applications | Application factor FB |
|--|-----------------------|
| Woodworking - reciprocating saws | 1.5 |
| Grinding machines | 1.5 |
| Textile machines - winders | 1.5 |
| Textile machines - printing machines | 1.5 |
| Textile machines - tanning vats | 1.5 |
| Textile machines - shredders | 1.5 |
| Textile machines - looms | 1.5 |
| Packaging machines | 1.5 |
| Brick molding machines | 1.75 |
| Transport and logistics | |
| Passenger transport - elevators | 1.5 |
| Passenger transport - escalators | 1.5 |
| Conveyor systems - bucket elevators | 1.5 |
| Conveyor systems - hauling winches | 1.5 |
| Conveyor systems - belt conveyors | 1.5 |
| Conveyor systems - endless-chain conveyors | 1.5 |
| Conveyor systems - circular conveyors | 1.5 |
| Conveyor systems - screw conveyors | 1.5 |
| Conveyor systems - inclined hoists | 1.5 |
| Crane traversing gear | 1.5 |
| Hoisting gear | 1.5 |
| Crane lifting gear | 2.0 |
| Crane traveling gear | 1.5 |
| Crane slewing gear | 1.5 |
| Crane fly jib hoists | 1.5 |
| Cable railways | 1.5 |
| Drag lifts | 1.5 |
| Winches | 1.5 |
| Cellulose and paper | |
| Paper-making machines, all | 1.5 |
| Pulper drives | 1.5 |
| Cement industry | |
| Crushers | 1.75 |
| Rotary furnaces | 1.5 |
| Hammer mills | 1.75 |
| Ball mills | 1.75 |
| Pug mills | 1.75 |
| Mixers | 1.5 |
| Pipe mills | 1.5 |
| Beater mills | 1.75 |
| Separators | 1.5 |
| Roller presses | 1.75 |

SELECTION OF THE COUPLING SIZE

E

The torque load of the coupling must be determined from the output of the driven machine and the coupling speed.

Rated coupling load $T_N = 9550 \times P_N / n_N$
 (T_N in Nm; P_N in kW; n_N in rpm)

The rated coupling load obtained in this way must be multiplied by factors and compared with the rated coupling torque. An ideal but expensive method is to measure the torque characteristic on the coupling. For this, Flender offers special adapters fitted with torque measuring devices.

The rated coupling torque T_{KN} is the torque which can be transmitted by the coupling over an appropriate period of use if the load is applied to the coupling purely statically at room temperature.

Application factors are to express the deviation of the real coupling load from the "ideal" load condition.

Coupling load in continuous operation

The operating principles of the driving and driven machines are divided into categories and the application factor FB derived from these in accordance with DIN 3990-1.

Application factor for N-EUPEX, N-EUPEX-DS, RUPEX, N-BIPEX, ELPEX-B, N-ARPEX, ARPEX, ZAPEX and FLUDEX

| Application factor FB | | | | |
|--|---|-----------------------------------|-------------|------------|
| Torque characteristic of the driving machine | Torque characteristic of the driven machine | | | |
| | uniform | uniform with moderate shock loads | non uniform | very rough |
| uniform | 1.0 | 1.25 | 1.5 | 1.75 |
| uniform with moderate shock loads | 1.25 | 1.5 | 1.75 | 2.0 |
| non uniform | 1.5 | 1.75 | 2.0 | 2.5 |

Examples of torque characteristic of driving machines:

- uniform: Electric motors with soft starting, steam turbines
- uniform with moderate shock loads: Electric motors without soft starting, hydraulic motors, gas and water turbines
- non uniform: Internal-combustion engines

Examples of torque characteristic in driven machines:

- uniform: Generators, centrifugal pumps for light fluids
- uniform with moderate shock loads: Centrifugal pumps for viscous fluids, elevators, machine tool drives, centrifuges, extruders, blowers, crane drives
- non uniform: Excavators, kneaders, conveyor systems, presses, mills
- very rough: Crushers, excavators, shredders, iron/smelting machinery

| Temperature factor FT | | | | | | | | | | | | |
|-----------------------|--------------------|--------------------|-----------------------------------|--------------------|-------------|-------------|-------------|-------------|--------------|--------------|--------------|-----|
| Coupling | Elastomer material | Low temperature °C | Temperature T_a on the coupling | | | | | | | | | |
| | | | under -30 °C | -30 °C up to 50 °C | up to 60 °C | up to 70 °C | up to 80 °C | up to 90 °C | up to 100 °C | up to 110 °C | up to 120 °C | |
| N-EUPEX | NBR | -30 | - | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | - | - | - | - |
| N-EUPEX | NR | -50 | 1.1 ¹⁾ | 1.0 | - | - | - | - | - | - | - | - |
| N-EUPEX | HNBR | -10 | - | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.25 | 1.25 | - | - |
| N-EUPEX DS | NBR | -30 | - | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | - | - | - | - |
| RUPEX | NBR | -30 | - | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | - | - | - | - |
| RUPEX | NR | -50 | 1.1 | 1.0 | - | - | - | - | - | - | - | - |
| RUPEX | HNBR | -10 | - | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.25 | 1.25 | - | - |
| N-BIPEX | TPU | -50 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | - | - |
| ELPEX | NR | -40 | 1.1 | 1.0 | 1.25 | 1.40 | 1.60 | - | - | - | - | - |
| ELPEX-B | NR | -50 | 1.1 | 1.0 | - | - | - | - | - | - | - | - |
| ELPEX-B | CR | -15 | - | 1.0 | 1.0 | 1.0 | - | - | - | - | - | - |
| ELPEX-S SN, NN, WN | NR | -40 | 1.1 | 1.0 | 1.25 | 1.40 | 1.60 | - | - | - | - | - |
| ELPEX-S NX | VMQ | -40 | 1.1 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.1 | 1.25 | 1.4 | 1.6 |

- NR = natural rubber, natural-synthetic rubber mixture
- NBR = nitril-butadiene-rubber (Perbunan)
- HNBR = hydrated acrylonitrile butadiene rubber
- CR = chloroprene rubber (FRAS fire-resistant and anti-static)
- VMQ = silicone
- TPU = polyurethane

¹⁾ The N-EUPEX coupling is not suitable for shock loads when used at low temperatures.

Coupling size $T_{KN} \geq T_N \cdot FB \cdot FT$

In the case of ARPEX and ZAPEX coupling types, no temperature factor (FT = 1.0) need be taken into account.

Coupling load at maximum and overload conditions

The maximum torque is the highest load acting on the coupling in normal operation. Maximum torques at a frequency of up to 25 times an hour are permitted and must be lower than the maximum coupling torque. Examples of maximum torque conditions are: Starting operations, stopping operations or usual operating conditions with maximum load.

$T_{Kmax} \geq T_{Max} \cdot FT$

Overload torques are maximum loads which occur only in combination with special, infrequent operating conditions. Examples of overload torque conditions are: Motor short circuit, emergency stop or blocking because of component breakage. Overload torques at a frequency of once a month are permitted and must be lower than the maximum overload torque of the coupling. The overload condition may last only a short while, i.e. fractions of a second.

$T_{KOL} \geq T_{OL} \cdot FT$

Coupling load due to dynamic torque load

Applying the frequency factor FF, the dynamic torque load must be lower than the coupling fatigue torque.

Dynamic torque load

$T_{KW} \geq T_W \cdot FF$

Frequency of the dynamic torque load $f_{err} \leq 10$ Hz frequency factor FF = 1.0

Frequency of the dynamic torque load $f_{err} > 10$ Hz frequency factor FF = $\sqrt{(f_{err}/10 \text{ Hz})}$

For the ZAPEX and ARPEX series, the frequency factor is always FF = 1.0.

SELECTION OF THE COUPLING SIZE

E

Checking the maximum speed

For all load situations $n_{K_{max}} \geq n_{max}$

Checking permitted shaft misalignment

For all load situations, the actual shaft misalignment must be less than the permitted shaft misalignment.

Checking bore diameter, mounting geometry and coupling design

The check must be made on the basis of the dimension tables. The maximum bore diameter applies to parallel keyways to DIN 6885. For other keyway geometries, the maximum bore diameter can be reduced.

On request, couplings with adapted geometry can be provided.

Coupling behavior under overload conditions

The ZAPEX, N-ARPEX, ARPEX, N-EUPEX, RUPEX and N-BIPEX coupling series can withstand overloads until the breakage of metal parts. These coupling series are designated as fail-safe.

The N-EUPEX DS, ELPEX-B, ELPEX-S and ELPEX coupling series throw overload. The elastomer element of these couplings is irreparably damaged without damage to metal parts when subjected to excessive overload.

These coupling series are designated as non-fail-safe. These types that fail can be fitted with a so-called fail-safe device. This additional component enables emergency operation, even after the rubber element of the coupling has been irreparably damaged.

Checking shaft-hub connection

The torques specified in the tables of power ratings data of the coupling series do not necessarily apply to the shaft-hub connection. Depending on the shaft-hub connection, proof of form stability is required. Flender recommends obtaining proof of form strength by using calculation methods in accordance with the current state of the art.

Fitting recommendations for the shaft-hub connection are given in the **Appendix**.

The coupling hub is frequently fitted flush with the shaft end face. If the shaft projects, the risk of collision with other coupling parts must be checked. If the shaft is set back, in addition to the load-bearing capacity of the shaft-hub connection, the correct positioning of the hub must be ensured as well. If the bearing hub length is insufficient, restorative forces may cause tilting movements and so wear to and impairment of the axial retention. Also, the position of the set screw to be positioned on sufficient shaft or parallel key material must be noted.

| Shaft-hub connection | Suggestion for calculation method |
|--|-----------------------------------|
| Keyway connection to DIN 6885-1 | DIN 6892 |
| Shrink fit | DIN 7190 |
| Spline to DIN 5480 | |
| Bolted flange connection | VDI 2230 |
| Flange connection with close-fitting bolts | |

Checking low temperature and chemically aggressive environment

The minimum permitted coupling temperature is specified in the Temperature factor FT table. In the case of chemically aggressive environments, please consult the manufacturer.

FEATURES OF THE STANDARD TYPE



| Couplings | Features of the standard type |
|---|--|
| All coupling series except ARPEX clamping hubs and FLUDEX with keyway to ASME B17.1 | Bore tolerance H7 |
| N-ARPEX and ARPEX clamping hubs | Bore tolerance H6 |
| FLUDEX couplings with keyway to ASME B17.1 | Hollow shafts: bore tolerance K7 other parts: Bore tolerance M7 |
| All coupling series with bore diameter - imperial | Parallel keyway to ASME B17.1 |
| Bore diameter metric in the case of ZAPEX, N-ARPEX and ARPEX coupling series as well as coupling hubs with applied brake disks or brake drums of the N-EUPEX and RUPEX series | Parallel keyway to DIN 6885-1 keyway width P9 |
| Bore diameter metric in the case of the N-EUPEX, RUPEX, N-BIPEX, ELPEX-S, ELPEX-B, ELPEX, FLUDEX coupling series | Parallel keyway to DIN 6885-1 keyway width JS9 |
| All coupling series except FLUDEX | Axial locking by means of set screw |
| FLUDEX coupling series | Axial lock by means of set screw or end washer |
| All coupling series | Balancing in accordance with half parallel key standard |
| ZAPEX, N-ARPEX, ARPEX, N-EUPEX, RUPEX, N-BIPEX, ELPEX-S, ELPEX-B and ELPEX coupling series | Balancing quality G16 |
| FLUDEX coupling series | Balancing quality G6.3 |
| All series | Unpainted |
| All series | Preservation with cleaning emulsion |
| FLUDEX couplings | Fuse 140 °C |

Configurator

The article number can be obtained with the help of the Configurator. The coupling can be selected in a product configurator and specified using selection menus.

The coupling can be selected via "Technical selection" (technical selection) or via "Direct selection" (via article-no.).

The Configurator is available under flender.com.

HIGHLY FLEXIBLE COUPLINGS ELPEX-B SERIES



| | |
|-----------------------------|--------------|
| General | 10/3 |
| Benefits | 10/3 |
| Application | 10/3 |
| Design and configurations | 10/4 |
| Technical specifications | 10/6 |
| <hr/> | |
| Type EBWN | 10/7 |
| <hr/> | |
| Type EBWT | 10/8 |
| <hr/> | |
| Type EBWZ | 10/10 |
| <hr/> | |
| Spare and wear parts | 10/12 |
| <hr/> | |



ELPEX-B
FLENDER

GENERAL



ELPEX-B couplings are highly flexible and free of torsional backlash. Because of their low torsional stiffness and damping capacity, ELPEX-B couplings are especially suitable for coupling machines with a highly non uniform torque pattern. ELPEX-B couplings are also suitable for connecting machines with high shaft misalignment.

Standard ELPEX-B coupling types are designed as shaft-shaft connections. Application-related types can be implemented on request.

Benefits

The ELPEX-B coupling is suitable for horizontal and vertical mounting positions or mounting positions at any required angle.

The elastic tire is slit at the circumference and can be changed without having to move the coupled machines.

The elastic tire is fitted without backlash and gives the coupling linear torsional stiffness, thus the torsional rigidity remains constant as the load on the coupling increases.

The ELPEX-B coupling is especially suitable for reversing operation or operation with changing directions of load. The coupling parts can be arranged as required on the shafts to be connected.

If the elastic tire is irreparably damaged or worn, the metal parts can rotate freely against one another because they are not in contact with one another.

Application

The ELPEX-B coupling is available as a catalog standard in 15 sizes with a rated torque of between 24 Nm and 14500 Nm. The coupling can be fitted with elastic tires made of natural rubber for ambient temperatures of -50 °C to +50 °C and with elastic tires made of chloroprene rubber for -15 °C to +70 °C.

The chloroprene rubber tire is marked FRAS, "Fire-resistant and Antistatic".

GENERAL

Design and configurations

The ELPEX-B coupling's transmission characteristic is determined essentially by the elastic tire. The elastic tire is manufactured from a natural rubber or a chloroprene rubber mixture with a multiply fabric insert. The elastic tire is fastened to the hubs with bolts and two clamping rings.

In type EBWT, the shaft-hub connection is achieved with Taper clamping bushes, in type EBWN with finish-drilled hubs and parallel keys. The type EBWZ connects the machine shafts additionally via a detachable adapter.

Metal part materials

- EN-GJL-250 grey cast iron or steel.

Elastic tire material

| Material | Hardness | Marking | Ambient temperature |
|--------------------|-----------|----------|---------------------|
| Natural rubber | 70 ShoreA | 48 | -50 ... +50 °C |
| Chloroprene rubber | 70 ShoreA | 068 FRAS | -15 ... +70 °C |

10

ELPEX-B coupling types

| Type | Description |
|-------------|--|
| EBWN | Coupling as a shaft-shaft connection with drilled and grooved hubs |
| EBWT | Coupling as a shaft-shaft connection with Taper clamping bushes |
| EBWZ | Coupling as shaft-shaft connection with detachable adapter |

Further application-specific coupling types are available; dimension sheets for and information on these are available on request.

The coupling types set up for shaft-hub connections with Taper clamping bushes are designated as follows:

- Variant A: Coupling with part 3 – part 3
- Variant B: Coupling with part 4 – part 4
- Variant AB: Coupling with part 3 – part 4


In the case of part 3, the Taper clamping bush is screwed in from the shaft end face side. The coupling half must be fitted before the machines to be connected are pushed together.

In the case of part 4, the Taper clamping bush is screwed in from the machine-housing side. If there is insufficient room, the Taper clamping bushes cannot be fitted from this side. Besides fitting space for the Taper clamping bush bolts, space for the fitting tool (offset screwdriver) must be taken into account.

In the case of coupling type EBWT, part 3 and part 4 can be combined as required. Furthermore, the variant with a Taper clamping bush can be combined with the finish-drilled hub.



Unfitted coupling

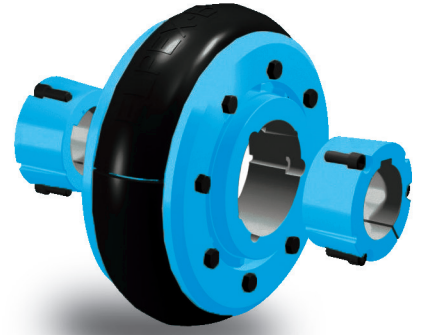Fitted coupling
[shown without connecting shafts]

Fitted elastic tire

The elastic tire can simply be slipped over the hub parts. The elastic tire is held firmly in place by fitting the clamping ring. The connection transmits the torque by frictional engagement.

GENERAL

Technical specifications

| Power ratings | | | | | | | | | |
|---------------|----------------|------------------|-----------------|----------------|-------------------|-----------------------------|--|------------------------------|---------------------------------|
| Size | Rated torque | Maximum torque | Overload torque | Fatigue torque | Maximum speed | Dynamic torsional stiffness | Permitted shaft misalignment at $n = 1500$ rpm ¹⁾ | | |
| | T_{KN} Nm | T_{Kmax} Nm | T_{KOL} Nm | T_{KW} Nm | n_{Kmax} rpm | C_{Tdyn} Nm/rad | Axial ΔK_a mm | Radial ΔK_r mm | Angle ΔK_w Degree |
| 105 | 24 | 48 | 72 | 7 | 4500 | 285 | 1.3 | 1.1 | 4 |
| 135 | 66 | 132 | 200 | 20 | 4500 | 745 | 1.7 | 1.3 | 4 |
| 165 | 125 | 250 | 375 | 38 | 4000 | 1500 | 2 | 1.6 | 4 |
| 190 | 250 | 500 | 750 | 75 | 3600 | 2350 | 2.3 | 1.9 | 4 |
| 210 | 380 | 760 | 1140 | 114 | 3100 | 3600 | 2.6 | 2.1 | 4 |
| 235 | 500 | 1000 | 1500 | 150 | 3000 | 5200 | 3 | 2.4 | 4 |
| 255 | 680 | 1360 | 2040 | 204 | 2600 | 7200 | 3.3 | 2.6 | 4 |
| 280 | 880 | 1760 | 2640 | 264 | 2300 | 10000 | 3.7 | 2.9 | 4 |
| 315 | 1350 | 2700 | 4050 | 405 | 2050 | 17000 | 4 | 3.2 | 4 |
| 360 | 2350 | 4700 | 7050 | 705 | 1800 | 28000 | 4.6 | 3.7 | 4 |
| 400 | 3800 | 7600 | 11400 | 1140 | 1600 | 44500 | 5.3 | 4.2 | 4 |
| 470 | 6300 | 12600 | 18900 | 1890 | 1500 | 78500 | 6 | 4.8 | 4 |
| 510 | 9300 | 18600 | 27900 | 2790 | 1300 | 110000 | 6.6 | 5.3 | 4 |
| 560 | 11500 | 23000 | 34500 | 3450 | 1100 | 160000 | 7.3 | 5.8 | 4 |
| 630 | 14500 | 29000 | 43500 | 4350 | 1000 | 200000 | 8.2 | 6.6 | 4 |

Torsional stiffness and damping

The damping coefficient is $\Psi = 0.9$

The technical data for the elastic tires made of natural rubber and chloroprene rubber are virtually identical.

Torsional stiffness depends on the ambient temperature and the frequency and amplitude of the torsional vibration excitation. More precise torsional stiffness and damping parameters on request.

With flexible couplings the manufacturing process of the rubber elements and their aging primarily influence the stiffness value C_{Tdyn} . For this reason calculation must be made with a tolerance for the dynamic stiffness of $\pm 20\%$. The specified damping coefficient Ψ is a minimum value with the result that the damping performance of the coupling corresponds at least to the specified value.

Permitted shaft misalignment

The permitted shaft misalignment depends on the operating speed. As the speed increases, lower shaft misalignment values are permitted. The correction factors for different speeds are specified in the following table. The maximum speed for the respective coupling size must be noted.


$$\Delta K_{perm} = \Delta K_{1500} \cdot FKV$$

| | Speed in rpm | | | |
|-----------------------|--------------|------|------|------|
| | 500 | 1000 | 1500 | 3000 |
| Correction factor FKV | 1.2 | 1.1 | 1.0 | 0.7 |


The restorative force (including in the axial direction) depends on speed, system torque and shaft misalignment. Restorative forces on request.

¹⁾ The maximum speed for the respective type must be noted. For additional information on the allowable shaft misalignment, please refer to the operating instructions.

TYPE EBWN

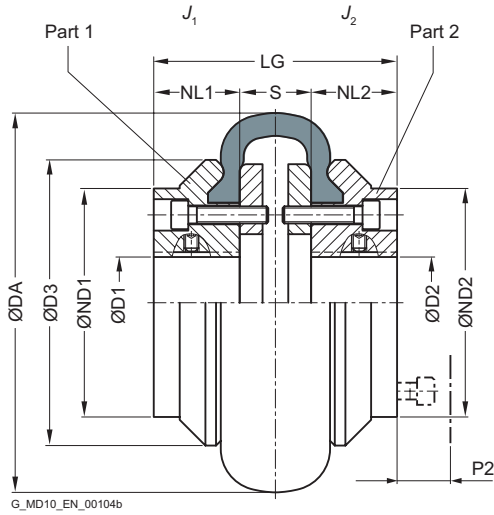

Sizes 105 ... 165

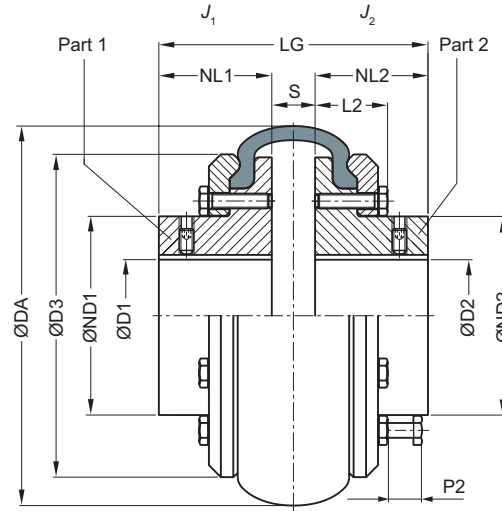

Sizes 190 ... 630

| Size | Rated torque T_{KN} Nm | Dimensions in mm | | | | | | | | | | Mass moment of inertia J_1/J_2 kgm ² | Article no. ¹⁾ | Weight m kg |
|------|--------------------------------|--|-----|-----|-------------|-------------|-----|----|----|----|-----|---|---------------------------|---------------------|
| | | D1, D2 Keyway DIN 6885-1 min. max. | | DA | ND1/ ND2 | NL1/ NL2 | D3 | L2 | S | P2 | LG | | | |
| 105 | 24 | - | 30 | 104 | 70 | 30 | 82 | - | 22 | 35 | 82 | 0.0011 | 2LC0210-0AA | 2.2 |
| 135 | 66 | - | 38 | 134 | 80 | 40 | 100 | - | 25 | 35 | 105 | 0.0025 | 2LC0210-1AA | 3.6 |
| 165 | 125 | - | 45 | 165 | 70 | 50 | 125 | - | 33 | 35 | 133 | 0.0056 | 2LC0210-2AA | 5.4 |
| 190 | 250 | - | 50 | 187 | 80 | 55 | 145 | 36 | 23 | 35 | 133 | 0.0095 | 2LC0210-3AA | 6.9 |
| 210 | 380 | - | 60 | 211 | 98 | 65 | 168 | 40 | 25 | 35 | 155 | 0.02 | 2LC0210-4AA | 11 |
| 235 | 500 | - | 70 | 235 | 111 | 70 | 188 | 45 | 27 | 35 | 167 | 0.023 | 2LC0210-5AA | 14.8 |
| 255 | 680 | - | 80 | 254 | 130 | 75 | 216 | 44 | 27 | 35 | 177 | 0.06 | 2LC0210-6AA | 20 |
| 280 | 880 | - | 90 | 280 | 145 | 80 | 233 | 45 | 25 | 35 | 185 | 0.083 | 2LC0210-7AA | 24.5 |
| 315 | 1350 | - | 95 | 314 | 155 | 90 | 264 | 50 | 29 | 35 | 209 | 0.129 | 2LC0210-8AA | 35 |
| 360 | 2350 | - | 125 | 359 | 200 | 100 | 311 | 50 | 32 | 35 | 232 | 0.32 | 2LC0211-0AA | 54 |
| 400 | 3800 | - | 135 | 402 | 216 | 125 | 345 | 59 | 30 | 35 | 280 | 0.55 | 2LC0211-1AA | 78 |
| 470 | 6300 | - | 160 | 470 | 260 | 140 | 398 | 67 | 46 | 35 | 326 | 1.12 | 2LC0211-2AA | 120 |
| 510 | 9300 | - | 140 | 508 | 250 | 150 | 429 | 73 | 48 | 35 | 348 | 1.6 | 2LC0211-3AA | 146 |
| | | 140 | 290 | | 1.7 | | | | | | | 154 | | |
| 560 | 11500 | - | 140 | 562 | 250 | 165 | 474 | 82 | 55 | 35 | 385 | 2.5 | 2LC0211-4AA | 200 |
| | | 140 | 300 | | 2.7 | | | | | | | 206 | | |
| 630 | 14500 | 80 | 140 | 629 | 250 | 195 | 532 | 82 | 59 | 35 | 449 | 4.1 | 2LC0211-5AA | 258 |
| | | 140 | 180 | | 300 | | | | | | | 4.4 | | 265 |

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- Weight and mass moments of inertia apply to maximum bore diameters.
- The article no. applies to elastic tires made of natural rubber.
- P2 = fitting space for dismounting the elastic tire

Ordering example

- ELPEX-B EBWN coupling, size 210
- Part 1: Bore 40H7mm, keyway to DIN 6885-1 and set screw
- Part 2: Bore 45H7 mm, keyway to DIN 6885-1 and set screw


Article no.: 2LC0210-4AA99-0AA0-Z L0W+M1A

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

➤ For online configuration on flender.com, click on the item no.


TYPE EBWT

Sizes 105 ... 165

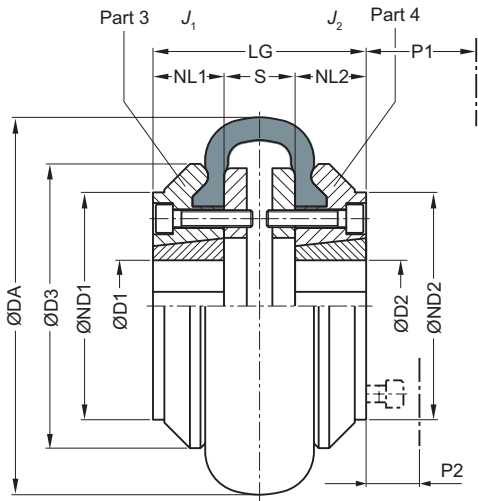

Variant AB


Sizes 190 ... 560

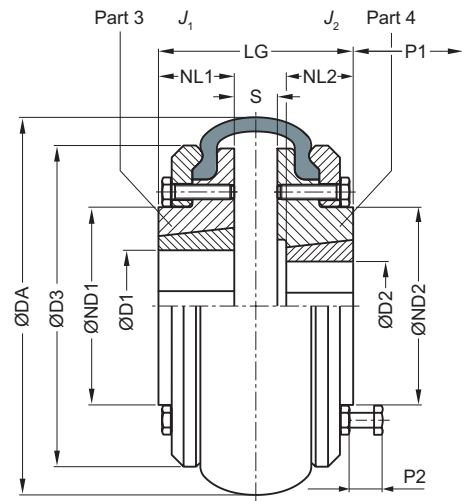


Variant AB

10


Sizes 105 ... 165

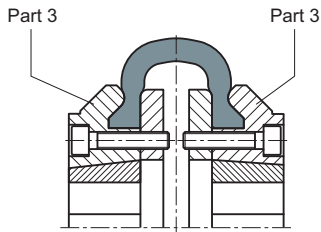

Variant A

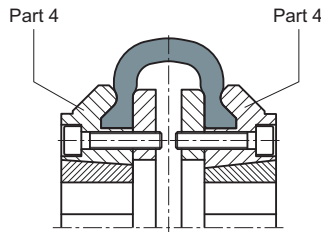


Variant B

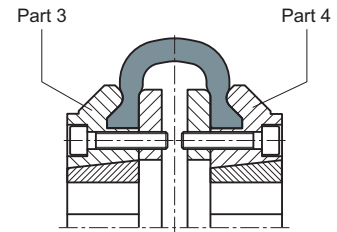


Variant AB


Sizes 190 ... 560



Variant A



Variant B



Variant AB

G_MD10_EN_00105b

Part 3: Screw connection for Taper clamping bush from the shaft end face side
 Part 4: Screw connection for Taper clamping bush from the machine-housing side

| Size | Rated torque T_{KN} Nm | Part no. | Taper Clamping Bush Size | Dimensions in mm | | | | | | | | | | | Mass moment of inertia J_1/J_2 kgm ² | Article no. ¹⁾ | | | Weight m kg |
|------|--------------------------------|---------------|--------------------------|--------------------------|------|-----|-------------------|-----------------|-----|----|-----------------|----|-------------------|--------|---|---------------------------|-------------|-----|---------------------|
| | | | | D1, D2 Keyway DIN 6885-1 | | DA | ND1/ND2 | NL1/NL2 | D3 | S | P1 | P2 | LG | Type | | | | | |
| | | | | min. | max. | | | | | | | | | A | | B | AB | | |
| 105 | 24 | $\frac{3}{4}$ | 1008 | 10 | 25 | 104 | - | 22 | 82 | 22 | 29 | 35 | 66 | 0.0009 | 2LC0210-0AB | 2LC0210-0AC | 2LC0210-0AD | 1.8 | |
| 135 | 66 | $\frac{3}{4}$ | 1210 | 11 | 32 | 134 | 80 | 25 | 100 | 25 | 38 | 35 | 75 | 0.0019 | 2LC0210-1AB | 2LC0210-1AC | 2LC0210-1AD | 2.4 | |
| 165 | 125 | $\frac{3}{4}$ | 1610 | 14 | 42 | 165 | 103 | 25 | 125 | 33 | 38 | 35 | 83 | 0.0049 | 2LC0210-2AB | 2LC0210-2AC | 2LC0210-2AD | 4 | |
| 190 | 250 | $\frac{3}{4}$ | 2012 | 14 | 50 | 187 | 80 | $\frac{32}{25}$ | 145 | 23 | $\frac{42}{38}$ | 35 | 87 | 0.0085 | 2LC0210-3AB | 2LC0210-3AC | 2LC0210-3AD | 5.4 | |
| 210 | 380 | $\frac{3}{4}$ | 2517 | 16 | 60 | 211 | 98 | $\frac{45}{32}$ | 168 | 25 | $\frac{48}{42}$ | 35 | $\frac{115}{89}$ | 0.017 | 2LC0210-4AB | 2LC0210-4AC | 2LC0210-4AD | 8 | |
| 235 | 500 | $\frac{3}{4}$ | 2517 | 16 | 60 | 235 | 108 | 46 | 188 | 27 | 48 | 35 | 119 | 0.019 | 2LC0210-5AB | 2LC0210-5AC | 2LC0210-5AD | 12 | |
| 255 | 680 | $\frac{3}{4}$ | 3020 | 25 | 75 | 254 | $\frac{120}{113}$ | $\frac{51}{45}$ | 216 | 27 | $\frac{55}{48}$ | 35 | $\frac{129}{117}$ | 0.05 | 2LC0210-6AB | 2LC0210-6AC | 2LC0210-6AD | 14 | |
| 280 | 880 | $\frac{3}{4}$ | 3020 | 25 | 75 | 280 | 134 | 52 | 233 | 25 | 55 | 35 | 129 | 0.075 | 2LC0210-7AB | 2LC0210-7AC | 2LC0210-7AD | 22 | |
| 315 | 1350 | $\frac{3}{4}$ | 3525 | 35 | 100 | 314 | 140 | $\frac{66}{51}$ | 264 | 29 | $\frac{67}{55}$ | 35 | $\frac{161}{131}$ | 0.11 | 2LC0210-8AB | 2LC0210-8AC | 2LC0210-8AD | 23 | |
| 360 | 2350 | $\frac{3}{4}$ | 3525 | 35 | 100 | 359 | 178 | 65 | 311 | 32 | 67 | 35 | 162 | 0.26 | 2LC0211-0AB | 2LC0211-0AC | 2LC0211-0AD | 38 | |
| 400 | 3800 | $\frac{3}{4}$ | 4030 | 40 | 115 | 402 | 200 | 77 | 345 | 30 | 80 | 35 | 184 | 0.44 | 2LC0211-1AB | 2LC0211-1AC | 2LC0211-1AD | 54 | |
| 470 | 6300 | $\frac{3}{4}$ | 4535 | 55 | 125 | 470 | 210 | 89 | 398 | 46 | 89 | 35 | 224 | 0.8 | 2LC0211-2AB | 2LC0211-2AC | 2LC0211-2AD | 72 | |
| 510 | 9300 | $\frac{3}{4}$ | 4535 | 55 | 125 | 508 | 208 | 89 | 429 | 48 | 89 | 35 | 226 | 1.5 | 2LC0211-3AB | 2LC0211-3AC | 2LC0211-3AD | 120 | |
| 560 | 11500 | $\frac{3}{4}$ | 5040 | 70 | 125 | 562 | 224 | 102 | 474 | 55 | 92 | 35 | 259 | 2 | 2LC0211-4AB | 2LC0211-4AC | 2LC0211-4AD | 120 | |

Configurable variants ¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- Weights and mass moments of inertia apply to couplings with Taper clamping bushes with maximum bore diameter.
- The article no. applies to elastic tires made of natural rubber.
- P1 = fitting space for offset screwdriver and ejector bolt for dismantling the Taper clamping bush
- P2 = fitting space for dismantling the elastic tire.

Ordering example

- ELPEX-B EBWT coupling, size 210, variant AB, including Taper clamping bushes
- Part 3: with Taper clamping bush, bore 60 mm
- Part 4: with Taper clamping bush, bore 40 mm


Article no.: 2LC0210-4AD99-0AA0-Z L1E+M0W

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

➤ For online configuration on flender.com, click on the item no.




TYPE EBWZ

Sizes 190 ... 470



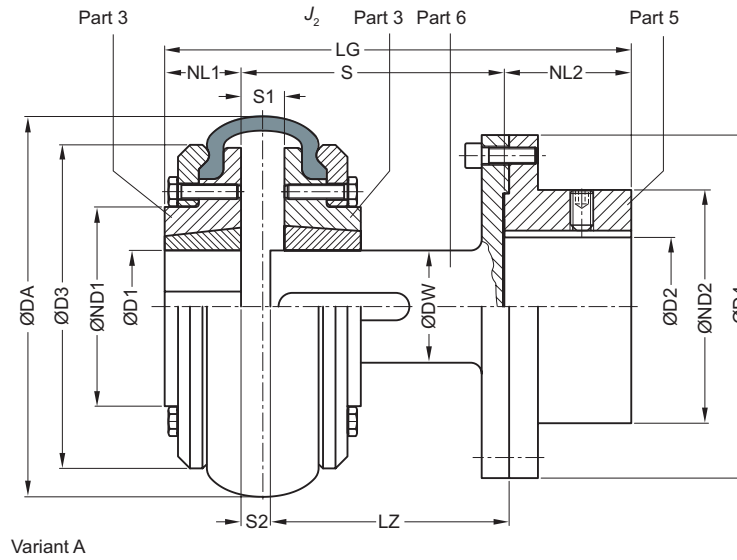


10

Sizes 105 ... 165

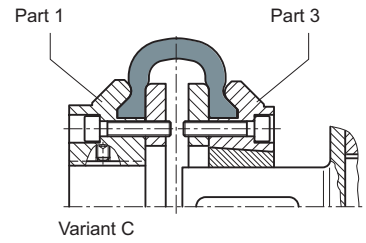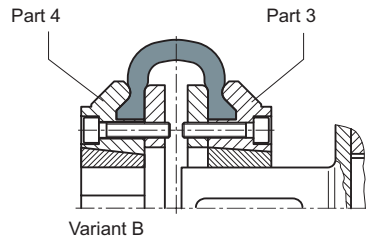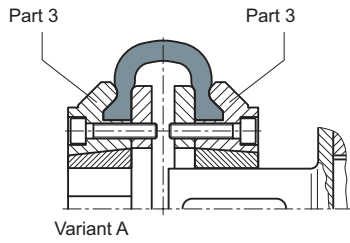

Sizes 190 ... 470

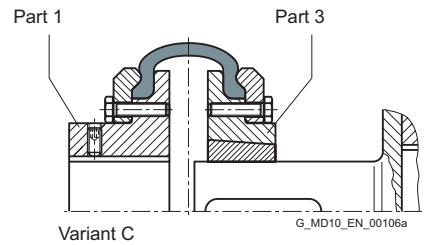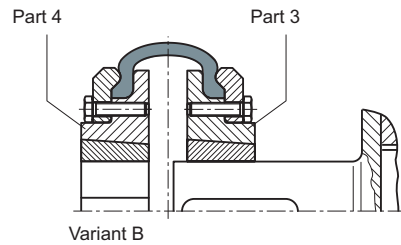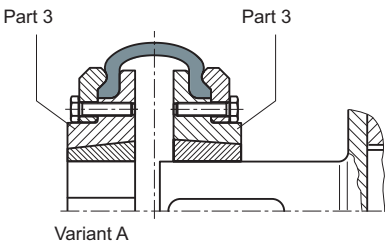

G_MD10_EN_00106a

Part 3: Screw connection for Taper clamping bush from the shaft end face side
 Part 4: Screw connection for Taper clamping bush from the machine-housing side

| Size | Rated torque T_{KN} Nm | Dimensions in mm | | | | | | | | | | | | Mass moment of inertia J_2 kgm ² | Article no. ¹⁾ | | | Weight m kg | |
|------|--------------------------------|--------------------------------|------|-----|-----|-----|-----|-----|----------------|------------|------------|------|----|---|---------------------------|-------------|-------------|---------------------|---|
| | | D1, D2 Keyway DIN 6885-1 | | DA | ND2 | D4 | DW | NL2 | LZ | S | | | S1 | | S2 | Type | | | |
| | | min. | max. | | | | | | | min. | max. | min. | | | | A | B | | C |
| 105 | 24 | - | 42 | 104 | 70 | 95 | 25 | 45 | 96 133 | 100 140 | 116 156 | 22 | 6 | 0.0027 | 2LC0210-0AG | 2LC0210-0AH | 2LC0210-0AJ | 3.3 | |
| 135 | 66 | - | 55 | 134 | 90 | 125 | 32 | 50 | 93 133 | 100 140 | 116 156 | 25 | 9 | 0.0085 | 2LC0210-1AG | 2LC0210-1AH | 2LC0210-1AJ | 5.4 | |
| 165 | 125 | - | 55 | 165 | 90 | 125 | 32 | 50 | 93 133 | 100 140 | 124 164 | 33 | 9 | 0.012 | 2LC0210-2AG | 2LC0210-2AH | 2LC0210-2AJ | 6.2 | |
| 190 | 250 | - | 75 | 187 | 125 | 180 | 48 | 80 | 93.5 133.5 | 100 140 | 114 154 | 23 | 9 | 0.046 | 2LC0210-3AG | 2LC0210-3AH | 2LC0210-3AJ | 16 | |
| 210 | 380 | - | 75 | 211 | 125 | 180 | 48 | 80 | 133.5 173.5 | 140 180 | 156 194 | 25 | 9 | 0.053 | 2LC0210-4AG | 2LC0210-4AH | 2LC0210-4AJ | 17 | |
| 235 | 500 | - | 75 | 235 | 125 | 180 | 48 | 80 | 133.5 173.5 | 140 180 | 158 198 | 27 | 9 | 0.056 | 2LC0210-5AG | 2LC0210-5AH | 2LC0210-5AJ | 25 | |
| 255 | 680 | - | 90 | 254 | 150 | 225 | 60 | 100 | 133.5 173.5 | 140 180 | 158 198 | 27 | 9 | 0.15 | 2LC0210-6AG | 2LC0210-6AH | 2LC0210-6AJ | 29 | |
| 280 | 880 | - | 90 | 280 | 150 | 225 | 60 | 100 | 133.5 173.5 | 140 180 | 156 196 | 25 | 9 | 0.17 | 2LC0210-7AG | 2LC0210-7AH | 2LC0210-7AJ | 33 | |
| 315 | 1350 | 46 | 100 | 314 | 165 | 250 | 80 | 110 | 134.5 174.5 | 140 180 | 160 200 | 29 | 9 | 0.28 | 2LC0210-8AG | 2LC0210-8AH | 2LC0210-8AJ | 40 | |
| 360 | 2350 | 46 | 100 | 359 | 165 | 250 | 80 | 110 | 134.5 174.5 | 140 180 | 163 203 | 32 | 9 | 0.43 | 2LC0211-0AG | 2LC0211-0AH | 2LC0211-0AJ | 48 | |
| 400 | 3800 | 51 | 110 | 402 | 180 | 280 | 90 | 120 | 223.5 | 230 | 250 | 30 | 10 | 0.88 | 2LC0211-1AG | 2LC0211-1AH | 2LC0211-1AJ | 73 | |
| 470 | 6300 | 51 | 120 | 470 | 200 | 315 | 100 | 140 | 207.5 | 214 | 250 | 46 | 10 | 0.97 | 2LC0211-2AG | 2LC0211-2AH | 2LC0211-2AJ | 104 | |

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore

- ØD2 Without finished bore
With finished bore

- S min. 100 mm
140 mm
180 mm

Notes

- Dimensions D1, ND1, NL1, J1 and fitting space for dismounting elastic tire and Taper clamping bush, see types EBWN or EBWT, **Page 10/7** or **Page 10/8**
- The article no. applies to elastic tires made of natural rubber.
- Mass moment of inertia J_2 and weight m as total of part 3, part 5 and part 6 with maximum bore diameter.

Ordering example

- ELPEX-B EBWZ coupling, size 360
 - variant C, for fitting length S min. = 190 mm
 - Part 1: Bore 65H7 mm, keyway to DIN 6885-1 and set screw
 - Part 5: Bore 70H7 mm, keyway to DIN 6885-1 and set screw
- Article no.: 2LC0211-0AJ99-0AC0-Z L1F+M1G

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

SPARE AND WEAR PARTS

Elastic tire

| Size | Article No. | | Chloroprene rubber | |
|------|--------------------------------------|--------------|--------------------------|--------------|
| | Natural rubber Identification 048 | Weight kg | Identification 068 FRAS | Weight kg |
| 105 | 2LC0210-0WA00-0AA0 | 0.1 | 2LC0210-0WA00-0AA0-Z K01 | 0.1 |
| 135 | 2LC0210-1WA00-0AA0 | 0.2 | 2LC0210-1WA00-0AA0-Z K01 | 0.2 |
| 165 | 2LC0210-2WA00-0AA0 | 0.4 | 2LC0210-2WA00-0AA0-Z K01 | 0.4 |
| 190 | 2LC0210-3WA00-0AA0 | 0.5 | 2LC0210-3WA00-0AA0-Z K01 | 0.5 |
| 210 | 2LC0210-4WA00-0AA0 | 0.8 | 2LC0210-4WA00-0AA0-Z K01 | 0.8 |
| 235 | 2LC0210-5WA00-0AA0 | 1 | 2LC0210-5WA00-0AA0-Z K01 | 1 |
| 255 | 2LC0210-6WA00-0AA0 | 1.2 | 2LC0210-6WA00-0AA0-Z K01 | 1.2 |
| 280 | 2LC0210-7WA00-0AA0 | 1.4 | 2LC0210-7WA00-0AA0-Z K01 | 1.4 |
| 315 | 2LC0210-8WA00-0AA0 | 2.6 | 2LC0210-8WA00-0AA0-Z K01 | 2.6 |
| 360 | 2LC0211-0WA00-0AA0 | 2.9 | 2LC0211-0WA00-0AA0-Z K01 | 2.9 |
| 400 | 2LC0211-1WA00-0AA0 | 3.1 | 2LC0211-1WA00-0AA0-Z K01 | 3.1 |
| 470 | 2LC0211-2WA00-0AA0 | 5.3 | 2LC0211-2WA00-0AA0-Z K01 | 5.3 |
| 510 | 2LC0211-3WA00-0AA0 | 7.8 | 2LC0211-3WA00-0AA0-Z K01 | 7.8 |
| 560 | 2LC0211-4WA00-0AA0 | 10.8 | 2LC0211-4WA00-0AA0-Z K01 | 10.8 |
| 630 | 2LC0211-5WA00-0AA0 | 12.4 | 2LC0211-5WA00-0AA0-Z K01 | 12.4 |

10

Note

- The elastic tires are wear parts.
The service life depends on the operating conditions.

HIGHLY FLEXIBLE COUPLINGS – ELPEX-S SERIES



| | |
|-----------------------------|--------------|
| General | 11/3 |
| Benefits | 11/3 |
| Application | 11/3 |
| Design and configurations | 11/4 |
| Function | 11/6 |
| Configuration | 11/6 |
| Technical specifications | 11/8 |
| ----- | |
| Type ESN | 11/14 |
| ----- | |
| Type ESNR | 11/16 |
| ----- | |
| Type ESD | 11/18 |
| ----- | |
| Type ESDR | 11/19 |
| ----- | |
| Type ESNW | 11/20 |
| ----- | |
| Type ESDW | 11/21 |
| ----- | |
| Type EST | 11/22 |
| ----- | |
| Spare and wear parts | 11/23 |
| ----- | |




GENERAL




Coupling suitable for use in potentially explosive atmospheres.

Complies with the current ATEX Directive for:

CE  II 2G Ex h IIC T4 ... T3 Gb X

 II 2D Ex h IIIC T120 °C ... 160 °C Db X

 I M2 Ex h Mb X

(Type EST is not available in Ex version.)

ELPEX-S couplings are highly torsionally flexible and because of their low torsional stiffness and damping capacity are especially suitable for coupling machines with a highly non uniform torque pattern.

Standard ELPEX-S coupling types are designed as flange-shaft-connections or shaft-shaft connections.

Application-related types can be implemented on request.

Benefits

The ELPEX-S coupling is suitable for horizontal and vertical mounting positions or mounting at any required angle. The coupling parts can be arranged as required on the shafts to be connected.

ELPEX-S couplings are especially suitable for reversing operation or operation with changing directions of load.

The rubber disk elements are fitted virtually without backlash and give the coupling linear torsional stiffness, i.e. the torsion stiffness remains constant even when the load on the coupling increases.

There are 4 different rubber element versions with different grades of torsional stiffness available for each size from stock.

Application

The ELPEX-S coupling is available as a catalog standard in 12 sizes with rated torques of between 330 Nm and 63000 Nm.

The coupling is suitable for ambient temperatures of between -40 °C and +120 °C.

The ELPEX-S coupling is frequently used for diesel motor drives or reciprocating compressor drives.

On certain types the flexible rings can be changed without having to move the coupled machines.

If substantial overload occurs, the rubber disk element of the coupling is irreparably damaged, the coupling throws the load and thus limits the overload for particular operating conditions. The coupling can be inserted and fitted blind e.g. in a bell housing.

There are outer flanges with different connection dimensions available for each coupling size.

Because the different rubber versions enable the torsional stiffness to be adjusted to meet requirements, the coupling is also suitable for drives which require a specific and preferably precalculated torsional vibration behavior setting.

GENERAL

Design and configurations

The rubber disk element is vulcanized onto a flange on the inside diameter. The flange can mount e.g. a Taper clamping bush or a hub. On its outer diameter the rubber disk element has driving teeth, which are inserted into the outer flange. The torque is transmitted positively between the rubber disk element and the outer flange.

In the type for shaft-shaft connection the outer flange is screwed to a flange hub mounted on a machine shaft.

Materials

| | Type EST | Types ESN. and ESD. |
|----------------------|--|--|
| Rubber disk element | EN-GJL-250 grey cast iron/ elastomer | EN-GJL-400 spheroidal graphite cast iron/elastomer |
| Hubs, part 1, part 2 | Steel | Steel |
| Outer flange | Cast aluminum Zn10Si8Mg Sizes 680 and 770 of spheroidal graphite cast iron EN-GJS-500 | Cast aluminum Zn10Si8Mg Sizes 680 and 770 of spheroidal graphite cast iron EN-GJS-500 |

Elastomer materials of the rubber disk element

| Material/ description | Hardness ShoreA | Marking | Ambient temperature |
|-------------------------------------|--------------------|---------|------------------------|
| Natural-synthetic rubber mixture | 50 ° ... 55 ° | WN | -40 °C ... +80 °C |
| | 60 ° ... 65 ° | NN | -40 °C ... +80 °C |
| | 70 ° ... 75 ° | SN | -40 °C ... +80 °C |
| Silicone rubber | 55 ° ... 65 ° | NX | -40 °C ... +120 °C |

11


ELPEX-S coupling types

| Type | Description |
|-------------|--|
| ESN | Coupling with hub, long or short version |
| ESD | Coupling with hub, with two rubber disk elements |
| ESNR | Coupling with hub, rubber disk element radially dismountable |
| ESDR | Coupling with hub with two rubber disk elements; rubber disk elements radially dismountable |
| ESNW | Coupling designed as a shaft-shaft connection with a rubber disk element; rubber disk element radially dismountable |
| ESDW | Coupling designed as a shaft-shaft connection with two rubber disk elements; rubber disk element radially dismountable |
| EST | Coupling suitable for mounting a Taper clamping bush |


Further application-related coupling types are available. Dimension sheets for and information on these are available on request.

The following versions have already been implemented a number of times:


- ELPEX-S coupling with brake drum, brake disk or flywheel mass
- ELPEX-S coupling with axial backlash limiter
- ELPEX-S coupling with adapter
- ELPEX-S coupling with bearing for mounting a cardan shaft
- ELPEX-S coupling for engaging/disengaging during standstill
- ELPEX-S coupling as part of a coupling combination
- ELPEX-S coupling with fail-safe device

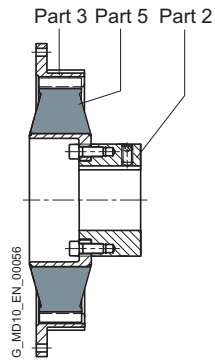


Type ESN – long version

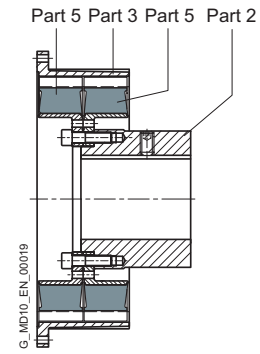


Type ESD

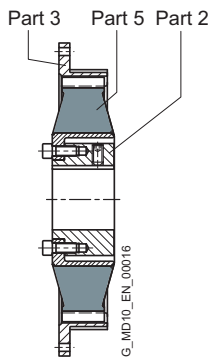


Type ESN – short version

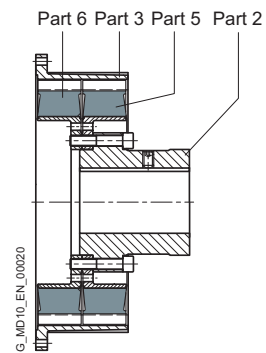


Type ESDR

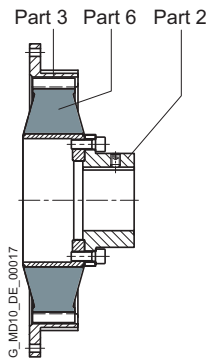


Type ESNR

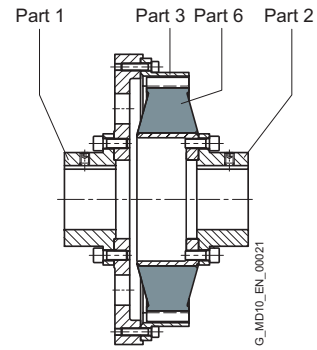

Type ESNW



Type EST

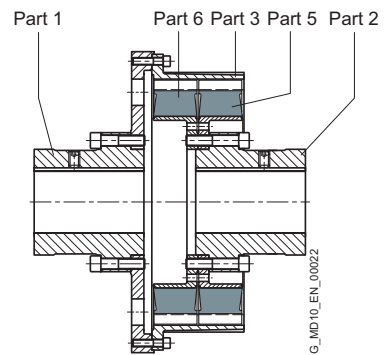

Type ESDW


GENERAL

Fail-safe device of ELPEX-S coupling

The ELPEX-S coupling can also be designed with a fail-safe device. If the rubber disk element fails, the coupling can continue operating in emergency mode for a short time. This option is frequently required e.g. in the case of marine drives.

If the rubber disk element fails, cams transmit the torque from the inner and outer parts of the fail-safe device.

In normal operation the torsion angle of the rubber disk element is smaller than the gap between the cams, so there is no metal-metal contact.

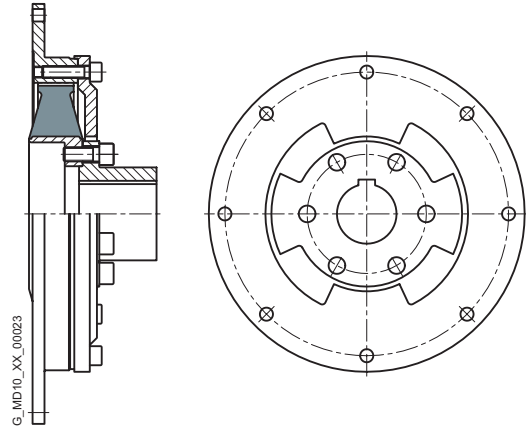

Function

The ELPEX-S coupling's transmission characteristic is determined essentially by the rubber disk element. The torque is transmitted positively between the rubber disk element and the outer flange.

The outer flange can be bolted to e.g. a diesel motor or compressor flywheel.

11

Configuration

Coupling selection

The ELPEX-S coupling is especially suitable for rough operating environments. An application factor lower than that in the chapter introduction is therefore sufficient for all applications.

In the case of machines which excite torsional vibration, Flender urgently recommends carrying out a torsional vibration calculation or measuring the coupling load occurring in the drive.

Coupling load in continuous operation

| Application factor FB | Torque characteristic of the driven machine | | |
|---|---|-------------|------------|
| | uniform with moderate shock loads | non uniform | very rough |
| Electric motors, hydraulic motors, gas and water turbines | 1.0 | 1.3 | 1.4 |
| Internal-combustion engines | 1.3 | 1.4 | 1.6 |

Examples of torque characteristic in driven machines:

- uniform with moderate shock loads: Generators, fans, blowers
- non uniform: Reciprocating compressors, mixers, conveyor systems
- very rough: crushers, excavators, presses, mills

| Temperature factor FT | | Temperature T_a on the coupling | | | | | | | | | |
|-----------------------|----------------|-----------------------------------|------------------|------------------|-------------|-------------|-------------|-------------|--------------|--------------|--------------|
| Coupling | Rubber version | Elastomer material | -40 up to -30 °C | -30 up to +50 °C | up to 60 °C | up to 70 °C | up to 80 °C | up to 90 °C | up to 100 °C | up to 110 °C | up to 120 °C |
| ELPEX-S | SN, NN, WN | NR | 1.1 | 1.0 | 1.25 | 1.40 | 1.60 | - | - | - | - |
| | NX | VMQ | 1.1 | 1.0 | 1.0 | 1.0 | 1.0 | 1.1 | 1.25 | 1.4 | 1.6 |

NR = Natural-synthetic rubber mixture
 VMQ = Silicone rubber

$$\text{Coupling size } T_{KN} \geq T_N \cdot FB \cdot FT$$

Coupling load under maximum and overload conditions

The maximum torque is the highest load acting on the coupling in normal operation.

Maximum torques at a frequency of up to 25 times an hour are permitted and must be lower than the maximum coupling torque. Examples of maximum torque conditions are: Starting operations, stopping operations or usual operating conditions with maximum load.

$$T_{K_{\max}} \geq T_{\max} \cdot FT$$

Overload torques are maximum loads which occur only in combination with special, infrequent operating conditions. Examples of overload torque conditions are: Motor short circuit, emergency stop or blocking because of component breakage. Overload torques at a frequency of once a month are permitted and must be lower than the maximum overload torque of the coupling. The overload condition may last only a short while, i.e. fractions of a second.

$$T_{K_{OL}} \geq T_{OL} \cdot FT$$

Coupling load due to dynamic torque load

Applying the frequency factor FF, the dynamic torque load must be lower than the coupling fatigue torque.

Dynamic torque load





$$T_{KW} \geq T_W \cdot FF \cdot FF$$

Frequency of the dynamic torque load

$$f_{err} \leq 10 \text{ Hz frequency factor } FF = 1.0$$

Frequency of the dynamic torque load

$$f_{err} > 10 \text{ Hz frequency factor } FF = \sqrt{(f_{err}/10 \text{ Hz})}$$

-  Operation in potentially explosive environments is subject to the following restriction:
Operation with low fatigue load
-  The fatigue torque TKW must be reduced by 70 %. In these particular operating conditions the coupling satisfies the requirements of temperature class T4 D120 °C.
Operation with medium fatigue load
-  The fatigue torque TKW must be reduced by 50 %. In these particular operating conditions the coupling satisfies the requirements of temperature class T3 D160 °C.
-  Type EST is not permitted for application in potentially explosive environments.

Checking the maximum speed

The following must apply to all load situations: $n_{K_{\max}} \geq n_{\max}$
The maximum speed of a size depends only on the size of the outer flange (part 3).

Checking permitted shaft misalignment and restorative forces

For all load situations, the actual shaft misalignment must be less than the permitted shaft misalignment.

Checking bore diameter, mounting geometry and coupling design

The check must be made on the basis of the dimension tables.

On request, couplings with adapted geometry can be provided.

Checking shaft-hub connection

For any information on this, please refer to [Page E/18](#).

Checking temperature and chemically aggressive environment

The permitted coupling temperature is specified in the Temperature Factor FT table. In the case of chemically aggressive environments, please consult the manufacturer.

GENERAL

Technical specifications

Performance data for rubber disk elements made of a mix of natural and synthetic rubber

| Type | Size | Rubber version | Rated torque | Maximum torque | Overload torque | Fatigue torque | dynamic torsional stiffness | Motor flange SAE J620d Size | Maximum speed n_{max} rpm |
|-----------|------|----------------|--------------|----------------|-----------------|----------------|-----------------------------|-----------------------------|-----------------------------|
| | | | T_{KN} Nm | T_{Kmax} Nm | T_{KOL} Nm | T_{KW} Nm | C_{Tdyn} Nm/rad | | |
| ESN . EST | 220 | WN | 330 | 660 | 750 | 165 | 1600 | 6.5 | 4200 |
| | | NN | 360 | 720 | 900 | 180 | 2500 | 7.5 | 4200 |
| | | SN | 400 | 800 | 1000 | 200 | 4200 | 8 10 | 4200 3600 |
| ESN . EST | 265 | WN | 500 | 1000 | 1250 | 250 | 2400 | 8 | 4200 |
| | | NN | 600 | 1200 | 1800 | 300 | 3600 | 10 | 3600 |
| | | SN | 700 | 1400 | 2100 | 350 | 6100 | 11.5 | 3500 |
| ESN . EST | 290 | WN | 800 | 1600 | 2000 | 400 | 3600 | 10 | 3600 |
| | | NN | 900 | 1800 | 2700 | 450 | 5000 | 11.5 | 3500 |
| | | SN | 1000 | 2000 | 3000 | 500 | 7500 | | |
| ESN . EST | 320 | WN | 1200 | 2400 | 3000 | 600 | 8000 | 11.5 | 3500 |
| | | NN | 1350 | 2700 | 3600 | 650 | 10000 | 14 | 3000 |
| | | SN | 1550 | 3100 | 4200 | 750 | 13500 | | |
| ESN . EST | 360 | WN | 1800 | 3600 | 4500 | 900 | 8500 | 11.5 | 3200 |
| | | NN | 2000 | 4000 | 5400 | 1000 | 13000 | 14 | 3000 |
| | | SN | 2500 | 5000 | 7500 | 1250 | 22000 | | |
| ESN . EST | 420 | WN | 3100 | 6200 | 7700 | 1500 | 16000 | 14 | 3000 |
| | | NN | 3450 | 6900 | 10000 | 1700 | 30000 | 16 | 2600 |
| | | SN | 4200 | 8400 | 12600 | 2100 | 45000 | 18 | 2300 |
| ESN . EST | 465 | WN | 4600 | 9200 | 10000 | 2300 | 35000 | 14 | 3000 |
| | | NN | 5200 | 10400 | 15600 | 2600 | 56000 | 16 | 2600 |
| | | SN | 6300 | 12600 | 18900 | 3100 | 100000 | 18 | 2300 |
| ESN . | 520 | WN | 6200 | 12400 | 14000 | 3100 | 38000 | 18 | 2300 |
| | | NN | 7000 | 14000 | 21000 | 3500 | 75000 | 21 | 2000 |
| | | SN | 7800 | 15600 | 23400 | 3900 | 110000 | | |
| ESD . | 520 | WN | 12400 | 24800 | 28000 | 6200 | 76000 | 18 | 2300 |
| | | NN | 14000 | 28000 | 42000 | 7000 | 150000 | 21 | 2000 |
| | | SN | 15600 | 31200 | 46800 | 7800 | 220000 | | |
| ESN . | 560 | WN | 8000 | 16000 | 18000 | 4200 | 55000 | 18 | 2300 |
| | | NN | 9000 | 18000 | 27000 | 4800 | 100000 | 21 | 2000 |
| | | SN | 10000 | 20000 | 30000 | 5500 | 190000 | | |
| ESD . | 560 | WN | 16000 | 32000 | 36000 | 8400 | 110000 | 18 | 2300 |
| | | NN | 18000 | 36000 | 54000 | 9600 | 200000 | 21 | 2000 |
| | | SN | 20000 | 40000 | 60000 | 11000 | 380000 | | |

| Performance data for rubber disk elements made of a mix of natural and synthetic rubber | | | | | | | | | |
|---|------|----------------|----------------|------------------|-----------------|----------------|-----------------------------|-----------------------------|--------------------------|
| Type | Size | Rubber version | Rated torque | Maximum torque | Overload torque | Fatigue torque | dynamic torsional stiffness | Motor flange SAE J620d Size | Maximum speed max rpm |
| | | | T_{KN} Nm | T_{Kmax} Nm | T_{KOL} Nm | T_{KW} Nm | C_{Tdyn} Nm/rad | | |
| ESN . | 580 | WN | 11000 | 22000 | 28000 | 5500 | 75000 | 18 | 2300 |
| | | NN | 12500 | 25000 | 37000 | 6250 | 120000 | | |
| | | SN | 14000 | 28000 | 42000 | 7000 | 210000 | | |
| ESD . | 580 | WN | 22000 | 44000 | 56000 | 11000 | 150000 | 21 | 2000 |
| | | NN | 25000 | 50000 | 74000 | 12500 | 240000 | | |
| | | SN | 28000 | 56000 | 84000 | 14000 | 420000 | | |
| ESN . | 680 | WN | 16000 | 32000 | 40000 | 8000 | 150000 | 21 | 2000 |
| | | NN | 18000 | 36000 | 54000 | 9000 | 250000 | | |
| | | SN | 20000 | 40000 | 60000 | 10000 | 450000 | | |
| ESD . | 680 | WN | 32000 | 64000 | 80000 | 16000 | 300000 | 21 | 2000 |
| | | NN | 36000 | 72000 | 108000 | 18000 | 500000 | | |
| | | SN | 40000 | 80000 | 120000 | 20000 | 900000 | | |
| ESN . | 770 | WN | 25000 | 50000 | 75000 | 12500 | 250000 | similar to DIN 6288 | 1500 |
| | | NN | 28000 | 56000 | 84000 | 14000 | 400000 | | |
| | | SN | 31500 | 63000 | 94000 | 15000 | 700000 | | |
| ESD . | 770 | WN | 50000 | 100000 | 150000 | 25000 | 500000 | similar to DIN 6288 | 1300 |
| | | NN | 56000 | 112000 | 168000 | 28000 | 800000 | | |
| | | SN | 63000 | 126000 | 189000 | 30000 | 1400000 | | |

Torsional stiffness and damping

Torsional stiffness depends on the ambient temperature and the frequency and amplitude of the torsional vibration excitation. More precise torsional stiffness and damping parameters on request.

With flexible couplings the manufacturing process of the rubber elements and their aging primarily influence the stiffness value C_{Tdyn} .

For this reason calculation must be made with a tolerance for the dynamic stiffness of $\pm 20\%$. The specified damping coefficient Ψ is a minimum value with the result that the damping performance of the coupling corresponds at least to the specified value.

GENERAL

Technical specifications

| Power ratings of the rubber disk elements made of silicone rubber | | | | | | | | | | | |
|---|------|----------------|----------------|--|------------------|--|-----------------|--|------------------------------|--|--|
| Type | Size | Rubber version | Rated torque | | Maximum torque | | Overload torque | | Fatigue torque | | Dynamic torsional stiffness for 100 % load C_{Tdyn} Nm/rad |
| | | | T_{KN} Nm | | T_{Kmax} Nm | | T_{KOL} Nm | | $T_{KW}(10\text{ Hz})$ Nm | | |
| ESN . | 220 | NX | 200 | | 300 | | 400 | | 87 | | 1.3 |
| ESN . | 265 | NX | 300 | | 450 | | 600 | | 133 | | 2.4 |
| ESN . | 290 | NX | 500 | | 750 | | 1000 | | 213 | | 4.2 |
| ESN . | 320 | NX | 770 | | 1150 | | 1530 | | 320 | | 9.2 |
| ESN . | 360 | NX | 1200 | | 1800 | | 2400 | | 480 | | 10 |
| ESN . | 420 | NX | 2000 | | 3000 | | 4000 | | 800 | | 23 |
| ESN . | 465 | NX | 3000 | | 4500 | | 6000 | | 1200 | | 60 |
| ESN . | 520 | NX | 4100 | | 6100 | | 8200 | | 1600 | | 65 |
| ESD . | 520 | NX | 8200 | | 12300 | | 16400 | | 3200 | | 130 |
| ESN . | 560 | NX | 5000 | | 7500 | | 10000 | | 2200 | | 100 |
| ESD . | 560 | NX | 10000 | | 15000 | | 20000 | | 4400 | | 200 |
| ESN . | 580 | NX | 6500 | | 9750 | | 13000 | | 2667 | | 160 |
| ESD . | 580 | NX | 13000 | | 19500 | | 26000 | | 5867 | | 310 |
| ESN . | 680 | NX | 10000 | | 15000 | | 20000 | | 4000 | | 280 |
| ESD . | 680 | NX | 20000 | | 30000 | | 40000 | | 8000 | | 550 |
| ESN . | 770 | NX | 15000 | | 22500 | | 30000 | | 6000 | | 620 |
| ESD . | 770 | NX | 30000 | | 45000 | | 60000 | | 12000 | | 1230 |

11

Torsional stiffness

The dynamic torsional stiffness of the silicone rubber elements is load-dependent and increases in proportion to the load. The values specified in the selection table represent 100 % loading. The following table shows the correction factors for different rated loads.

Torsional stiffness also depends on the ambient temperature and the frequency and amplitude of the torsional vibration excitation. More precise torsional stiffness and damping parameters on request.

$$C_{Tdyn} = C_{Tdyn} 100 \% \cdot FK C$$

| Correction factor FK C | Load T_N / T_{KN} | | | | | | |
|------------------------|---------------------|------|------|------|------|------|------|
| | 20% | 50% | 60% | 70% | 80% | 100% | 150% |
| | 0.59 | 0.75 | 0.79 | 0.83 | 0.88 | 1 | 1.5 |

Damping coefficient

| Damping coefficient of the rubber versions | | |
|--|-----------------|----------------------------|
| Rubber version | Hardness ShoreA | Damping coefficient Ψ |
| WN | 55 ° ± 5 ° | 0.80 |
| NN | 65 ° ± 5 ° | 1.15 |
| SN | 75 ° ± 5 ° | 1.25 |
| NX | 60 ° ± 5 ° | 1.15 |

With flexible couplings the manufacturing process of the rubber elements and their aging primarily influence the stiffness value C_{Tdyn} . For this reason calculation must be made with a tolerance for the dynamic stiffness of ± 20 %. The specified damping coefficient Ψ is a minimum value with the result that the damping performance of the coupling corresponds at least to the specified value.

Permitted shaft misalignment

The permitted shaft misalignment depends on the operating speed. As the speed increases, lower shaft misalignment values are permitted.

For fitting, the maximum gap dimension of $S_{max.} = S + \Delta S$ and the minimum gap dimension of $S_{min.} = S - \Delta S$ are permitted.

| Size | Assembly Shaft distance ΔS mm | Permitted shaft misalignment at $n = 1500$ rpm | | |
|------|---------------------------------------|--|------------------------|---------------------------|
| | | Axial ΔK_a mm | Radial ΔK_r mm | Angle ΔK_w degree |
| 220 | 1.3 | 0.2 | 1.2 | 0.5 |
| 265 | 1.3 | 0.2 | 1.2 | 0.5 |
| 290 | 1.5 | 0.2 | 1.2 | 0.5 |
| 320 | 1.5 | 0.2 | 1.2 | 0.5 |
| 360 | 1.5 | 0.2 | 1.2 | 0.5 |
| 420 | 1.5 | 0.3 | 1.3 | 0.4 |
| 465 | 1.7 | 0.3 | 1.3 | 0.4 |
| 520 | 1.7 | 0.3 | 1.4 | 0.4 |
| 560 | 1.7 | 0.3 | 1.4 | 0.4 |
| 580 | 1.8 | 0.4 | 1.5 | 0.3 |
| 680 | 1.8 | 0.4 | 1.5 | 0.3 |
| 770 | 2.0 | 0.5 | 1.5 | 0.3 |

The correction factors for different speeds are specified in the following table.

The maximum speed for the respective coupling size and type must be noted!

$$\Delta K_{perm} = \Delta K_{1500} \cdot FKV$$

| | Speed in rpm | | | |
|-----------------------|--------------|------|------|------|
| | 500 | 1000 | 1500 | 3000 |
| Correction factor FKV | 1.2 | 1.1 | 1.0 | 0.7 |

GENERAL

Variants of the outer flange

The outer flange of sizes 220 to 680 is designed to fit the connection dimensions of the SAE J620d standard. The centering depth on the connection flange of the machine should be between 4 mm and 6.4 mm maximum.

| Type | Size | Flange connection size | Figure | |
|-----------|------|------------------------|--------|-------|
| ESN | 220 | 6.5 | 1 | |
| ESN | 220 | 7.5 | 2 | |
| ESN, ESNR | 265 | 8 | | |
| | 360 | 11.5 | | |
| | 465 | 14 | | |
| | 580 | 18 | | |
| ESN, ESNR | 680 | 21 | 3 | |
| | ESN | 220 | | 8, 10 |
| | 265 | 10, 11.5 | | |
| | 290 | all | | |
| | 320 | all | | |
| | 360 | 14 | | |
| | 420 | all | | |
| | 465 | 16, 18 | | |
| | 520 | all | | |
| | 560 | all | | |
| 580 | 21 | | | |
| 680 | 24 | | | |
| ESNR | 770 | all | 4 | |
| ESD, ESDR | 520 | all | | |
| | 560 | all | | |
| ESD, ESDR | 580 | all | | |
| | 680 | 21 | 5 | |
| ESD, ESDR | 680 | 24 | 6 | |
| ESDR | 770 | all | | |

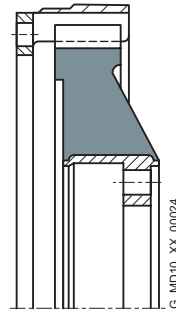


Figure 1

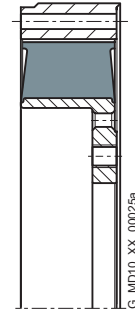


Figure 2

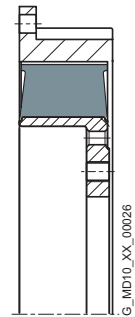


Figure 3

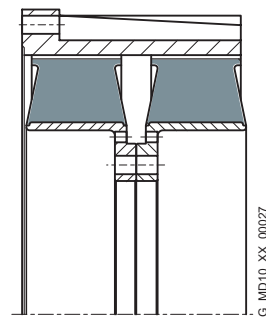


Figure 4

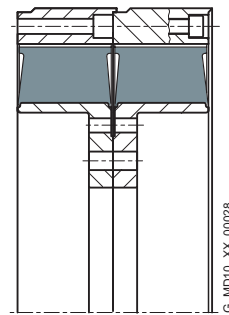


Figure 5



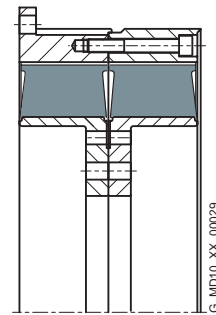


Figure 6

TYPE ESN

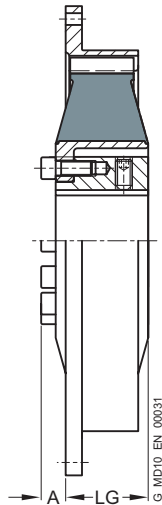

Short version

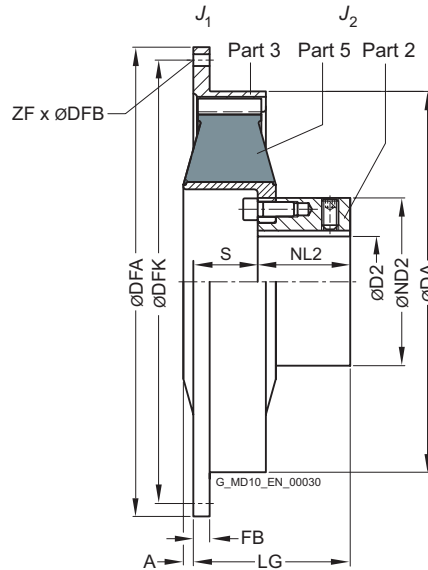

Long version

11

| Size | Dimensions in mm | | | | | | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | | Weight m kg | | |
|------|----------------------------------|-------|-----|-----|---------------|----|--------------|----|-----|------------------------------|-------|-------|----|------------------------|------------------------------------|------------------------------------|--------------|-------------------|---------------|--------------|
| | D2 Keyway DIN 6885 max. | DA | ND2 | NL2 | short version | | long version | | | Flange connection dimensions | | | | | J ₁ kgm ² | J ₂ kgm ² | Type | | short version | long version |
| | | | | | A | LG | A | S | LG | SAE size | DFA | DFK | FB | ZF | | | | | | |
| 220 | 60 | 222 | 98 | 54 | - | - | 0 | 49 | 103 | 6.5 | 215.9 | 200.0 | 6 | 6 | 8.5 | 0.008 | 0.01 | - | 2LC0220-0AB0 | 5.8 |
| | | 237 | | | | | | 40 | 94 | 7.5 | 241.3 | 222.3 | 33 | 8 | 8.5 | 0.011 | | - | 2LC0220-0AB0 | 6.1 |
| | | 222 | | | | | | 40 | 94 | 8 | 263.5 | 244.5 | 8 | 6 | 10.5 | 0.011 | | - | 2LC0220-0AB0 | 6.4 |
| | | 222 | | | | | | 40 | 94 | 10 | 314.3 | 295.3 | 8 | 8 | 10.5 | 0.017 | | - | 2LC0220-0AB0 | 6.9 |
| 265 | 65 | 263 | 118 | 65 | 15 | 74 | 3 | 39 | 104 | 8 | 263.5 | 244.5 | 33 | 6 | 0.011 | 0.022 | 2LC0220-1AA0 | 2LC0220-1AB0 | 6.6 | |
| | | | | | | | | | | 10 | 314.3 | 295.3 | 10 | 8 | 10.5 | | 0.017 | 2LC0220-1AA0 | 2LC0220-1AB0 | 6.9 |
| | | | | | | | | | | 11.5 | 352.4 | 333.4 | 10 | 8 | 0.024 | | 2LC0220-1AA0 | 2LC0220-1AB0 | 7.2 | |
| 290 | 65 | 290 | 118 | 70 | 18 | 58 | 6 | 36 | 106 | 10 | 314.3 | 295.3 | 16 | 8 | 0.026 | 0.026 | 2LC0220-2AA0 | 2LC0220-2AB0 | 9.2 | |
| | | | | | | | | | | 11.5 | 352.4 | 333.4 | 16 | 8 | 0.036 | | 2LC0220-2AA0 | 2LC0220-2AB0 | 10.5 | |
| 320 | 80 | 318 | 140 | 87 | 15 | 96 | 2 | 70 | 157 | 11.5 | 352.4 | 333.4 | 16 | 8 | 10.5 | 0.062 | 0.061 | 2LC0220-3AA0 | 2LC0220-3AB0 | 19 |
| | | | | | | | | | | 14 | 466.7 | 438.2 | 16 | 8 | 13 | 0.18 | | 2LC0220-3AA0 | 2LC0220-3AB0 | 20.5 |
| 360 | 90 | 353.5 | 160 | 105 | 29 | 92 | 13 | 56 | 161 | 11.5 | 352.4 | 333.4 | 54 | 8 | 10.5 | 0.065 | 0.13 | 2LC0220-4AA0 | 2LC0220-4AB0 | 24.5 |
| | | | | | | | | | | 14 | 466.7 | 438.2 | 15 | 8 | 13 | 0.18 | | 2LC0220-4AA0 | 2LC0220-4AB0 | 27.5 |
| | | | | | | | | | | 14 | 466.7 | 438.2 | 18 | 8 | 13 | 0.22 | | 2LC0220-5AA0 | 2LC0220-5AB0 | 36 |
| 420 | 100 | 420 | 185 | 102 | 26 | 92 | 10 | 72 | 174 | 16 | 517.5 | 489.0 | 18 | 8 | 13 | 0.32 | 0.32 | 2LC0220-5AA0 | 2LC0220-5AB0 | 38 |
| | | | | | | | | | | 18 | 571.5 | 542.9 | 18 | 6 | 17 | 0.47 | | 2LC0220-5AA0 | 2LC0220-5AB0 | 40 |

Configurable variants ¹⁾

- ØD2 Without finished bore
With finished bore
- Rubber version WN
NN
SN
NX

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

➤ For online configuration on flender.com, click on the item no.

| Size | Dimensions in mm | | | | | | | | | | | | | Mass moment of inertia | | ➤ Article no. ¹⁾ | | Weight <i>m</i> kg | | |
|------|----------------------------------|-----|-----|-----|---------------|-----|--------------|-----|-----|------------------------------|-------|-------|-----|------------------------|---|---|------|--------------------------|---------------|--------------|
| | D2 Keyway DIN 6885 max. | DA | ND2 | NL2 | short version | | long version | | | Flange connection dimensions | | | | | <i>J</i> ₁ kgm ² | <i>J</i> ₂ kgm ² | Type | | | |
| | | | | | A | LG | A | S | LG | SAE size | DFA | DFK | FB | ZF | | | DFB | | short version | long version |
| | | | | | | | | | | | | | | | | | | | | |
| 465 | 120 | 465 | 222 | 125 | 33 | 92 | 2 | 39 | 164 | 14 | 466.7 | 438.2 | 85 | 8 | 13 | 0.31 | 0.58 | 2LC0220-6AA0 | 2LC0220-6AB0 | 56 |
| | | | | | | | | | | 16 | 517.5 | 489.0 | 27 | 8 | 13 | 0.41 | | 2LC0220-6AA0 | 2LC0220-6AB0 | 57 |
| | | | | | | | | | | 18 | 571.5 | 542.9 | 18 | 6 | 17 | 0.52 | | 2LC0220-6AA0 | 2LC0220-6AB0 | 61 |
| 520 | 165 | 514 | 250 | 142 | 16 | 159 | 0 | 83 | 225 | 18 | 571.5 | 542.9 | 18 | 12 | 17 | 0.48 | 0.93 | 2LC0220-7AA0 | 2LC0220-7AB0 | 55 |
| | | | | | | | | | | 21 | 673.1 | 641.4 | 18 | 12 | 17 | 0.95 | | 2LC0220-7AA0 | 2LC0220-7AB0 | 60 |
| 560 | 200 | 560 | 320 | 140 | 30 | 130 | 2.5 | 83 | 223 | 18 | 571.5 | 542.9 | 35 | 12 | 17 | 0.85 | 1.2 | 2LC0220-8AA0 | 2LC0220-8AB0 | 69 |
| | | | | | | | | | | 21 | 673.1 | 641.4 | 20 | 12 | 17 | 1.8 | | 2LC0220-8AA0 | 2LC0220-8AB0 | 78 |
| 580 | 200 | 580 | 316 | 200 | 23 | 215 | 0 | 100 | 300 | 18 | 571.5 | 542.9 | 104 | 12 | 17 | 0.77 | 1.8 | 2LC0221-0AA0 | 2LC0221-0AB0 | 100 |
| | | | | | | | | | | 21 | 673.1 | 641.4 | 26 | 12 | 17 | 1.2 | | 2LC0221-0AA0 | 2LC0221-0AB0 | 105 |
| 680 | 220 | 682 | 380 | 210 | 24 | 232 | 0 | 102 | 312 | 21 | 673.1 | 641.4 | 85 | 12 | 17 | 4.1 | 5.3 | 2LC0221-1AA0 | 2LC0221-1AB0 | 205 |
| | | | | | | | | | | 24 | 733.4 | 692.2 | 20 | 12 | 21 | 5.3 | | 2LC0221-1AA0 | 2LC0221-1AB0 | 215 |

Configurable variants ¹⁾

- ØD2 Without finished bore
 With finished bore

- Rubber version WN
 NN
 SN
 NX

Notes

- The rubber disk element cannot be dismounted until the machines have been moved.
- Weight and mass moments of inertia apply to maximum bore diameters.

Ordering example

- ELPEX-S ESN coupling, size 520, WN rubber element version
- Bore ØD2 = 150H7 mm, with keyway to DIN 6885 and set screw, outer flange to SAE J620d size 21


Short version article no.: 2LC0220-7AA09-1JA0-Z M1W

Long version article no.: 2LC0220-7AB09-1JA0-Z M1W

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on fender.com.

➤ For online configuration on fender.com, click on the item no.

TYPE ESNR

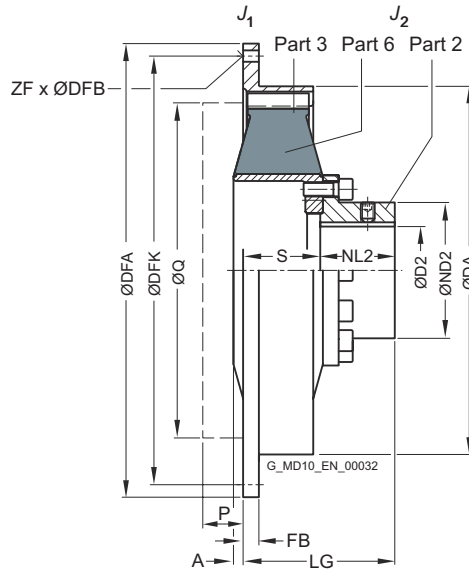

| Size | Dimensions in mm | | | | | | | | | | Flange connection dimensions | | | | | Mass moment of inertia | | Article no. ¹⁾ | Weight m kg |
|------|----------------------------------|-------|-----|-----|----|---|----|-----|-----|-------------|------------------------------|-------|----|----|------|------------------------------------|------------------------------------|---------------------------|-------------------|
| | D2 Keyway DIN 6885 max. | DA | ND2 | NL2 | S | A | P | Q | LG | SAE size | DFA | DFK | FB | ZF | DFB | J ₁ kgm ² | J ₂ kgm ² | | |
| 265 | 50 | 263 | 78 | 65 | 42 | - | 10 | 225 | 107 | 8 | 263.5 | 244.5 | 33 | 6 | 10.5 | 0.011 | 0.022 | 2LC0220-1AC0 | 5.0 |
| | | | | | | | | | | 10 | 314.3 | 295.3 | 10 | 8 | | 0.017 | | 2LC0220-1AC0 | 5.3 |
| | | | | | | | | | | 11.5 | 352.4 | 333.4 | 10 | 8 | | 0.024 | | 2LC0220-1AC0 | 5.6 |
| 290 | 50 | 290 | 78 | 65 | 59 | 2 | 15 | 276 | 124 | 10 | 314.3 | 295.3 | 16 | 8 | 10.5 | 0.026 | 0.026 | 2LC0220-2AC0 | 8.1 |
| | | | | | | | | | | 11.5 | 352.4 | 333.4 | 16 | 8 | | 0.036 | | 2LC0220-2AC0 | 8.4 |
| 320 | 65 | 318 | 98 | 87 | 74 | 0 | 20 | 310 | 161 | 11.5 | 352.4 | 333.4 | 16 | 8 | 10.5 | 0.062 | 0.061 | 2LC0220-3AC0 | 13.5 |
| | | | | | | | | | | 14 | 466.7 | 438.2 | 16 | 8 | | 0.18 | | 2LC0220-3AC0 | 16 |
| 360 | 85 | 353.5 | 123 | 88 | 77 | 9 | 28 | 314 | 165 | 11.5 | 352.4 | 333.4 | 54 | 8 | 10.5 | 0.065 | 0.13 | 2LC0220-4AC0 | 20 |
| | | | | | | | | | | 14 | 466.7 | 438.2 | 15 | 8 | | 0.18 | | 2LC0220-4AC0 | 23 |
| 420 | 100 | 420 | 155 | 85 | 93 | 6 | 28 | 409 | 178 | 14 | 466.7 | 438.2 | 18 | 8 | 13 | 0.22 | 0.32 | 2LC0220-5AC0 | 31 |
| | | | | | | | | | | 16 | 517.5 | 489.0 | 18 | 8 | | 0.32 | | 2LC0220-5AC0 | 32 |
| | | | | | | | | | | 18 | 571.5 | 542.9 | 18 | 6 | | 0.47 | | 2LC0220-5AC0 | 35 |
| 465 | 130 | 465 | 190 | 119 | 88 | - | 15 | 409 | 207 | 14 | 466.7 | 438.2 | 85 | 8 | 13 | 0.31 | 0.58 | 2LC0220-6AC0 | 41 |
| | | | | | | | | | | 16 | 517.5 | 489.0 | 27 | 8 | | 0.41 | | 2LC0220-6AC0 | 42 |
| | | | | | | | | | | 18 | 571.5 | 542.9 | 18 | 6 | | 0.52 | | 2LC0220-6AC0 | 45 |

Configurable variants ¹⁾

- ØD2 Without finished bore
With finished bore
- Rubber version WN
NN
SN
NX

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

| Size | Dimensions in mm | | | | | | | | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | Weight <i>m</i> kg |
|------|----------------------------------|-----|-----|-----|-----|---|----|-----|-----|------------------------------|-----------|-------|-----|----|-----|---|---|---------------------------|--------------------------|
| | D2 Keyway DIN 6885 max. | DA | ND2 | NL2 | S | A | P | Q | LG | Flange connection dimensions | | | | | | <i>J</i> ₁ kgm ² | <i>J</i> ₂ kgm ² | | |
| | | | | | | | | | | SAE size | DFA g7 | DFK | FB | ZF | DFB | | | | |
| 520 | 150 | 514 | 227 | 162 | 85 | - | 10 | 498 | 247 | 18 | 571.5 | 542.9 | 18 | 12 | 17 | 0.48 | 0.93 | 2LC0220-7AC0 | 59 |
| | | | | | | | | | | 21 | 673.1 | 641.4 | 18 | 12 | 17 | 0.95 | | 2LC0220-7AC0 | 64 |
| 560 | 150 | 560 | 240 | 180 | 99 | - | 10 | 498 | 279 | 18 | 571.5 | 542.9 | 35 | 12 | 17 | 0.85 | 1.2 | 2LC0220-8AC0 | 75 |
| | | | | | | | | | | 21 | 673.1 | 641.4 | 20 | 12 | 17 | 1.8 | | 2LC0220-8AC0 | 85 |
| 580 | 160 | 580 | 240 | 200 | 102 | - | 10 | 498 | 302 | 18 | 571.5 | 542.9 | 104 | 12 | 17 | 0.77 | 1.8 | 2LC0221-0AC0 | 80 |
| | | | | | | | | | | 21 | 673.1 | 641.4 | 26 | 12 | 17 | 1.2 | | 2LC0221-0AC0 | 84 |
| 680 | 200 | 682 | 300 | 210 | 102 | - | 10 | 584 | 312 | 21 | 673.1 | 641.4 | 85 | 12 | 17 | 4.1 | 5.3 | 2LC0221-1AC0 | 155 |
| | | | | | | | | | | 24 | 733.4 | 692.2 | 20 | 12 | 21 | 5.3 | | 2LC0221-1AC0 | 165 |
| 770 | 260 | 780 | 390 | 255 | 134 | - | 10 | 750 | 389 | - | 860.0 | 820.0 | 26 | 32 | 21 | 10.7 | 12 | 2LC0221-2AC0 | 330 |
| | | | | | | | | | | - | 920.0 | 880.0 | 27 | 32 | 21 | 15.4 | | 2LC0221-2AC0 | 350 |
| | | | | | | | | | | - | 995.0 | 950.0 | 27 | 32 | 21 | 20.5 | | 2LC0221-2AC0 | 375 |

Configurable variants¹⁾

- ØD2 Without finished bore
 With finished bore

- Rubber version WN
 NN
 SN
 NX

Notes

- Weight and mass moments of inertia apply to maximum bore diameters.
- P, Q = required space for radial dismounting of the rubber disk element.


Ordering example

- ELPEX-S ESNR coupling, size 320, WN rubber element version
- Bore ØD2 = 50H7 mm, with keyway to DIN 6885 and set screw, outer flange to SAE J620d size 14

Article no.: 2LC0220-3AC09-1FA0-Z M1C

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on fender.com.
 ↗ For online configuration on fender.com, click on the item no.

TYPE ESD

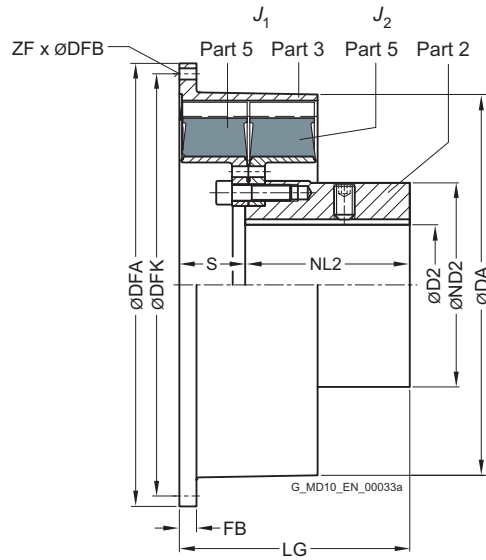

| Size | Dimensions in mm | | | | | | Flange connection dimensions | | | | | | Mass moment of inertia | | Article no. ¹⁾ | Weight <i>m</i> kg |
|------|-------------------------|-----|-----|-----|-----|-----|------------------------------|-------|-------|----|----|-----|---|---|---------------------------|--------------------------|
| | D2 Keyway DIN 6885 max. | DA | ND2 | NL2 | S | LG | SAE size | DFA | DFK | FB | ZF | DFB | <i>J</i> ₁ kgm ² | <i>J</i> ₂ kgm ² | | |
| 520 | 165 | 525 | 250 | 174 | 81 | 255 | 18 | 571.5 | 542.9 | 25 | 12 | 17 | 1 | 1.6 | 2LC0220-7AD0 | 85 |
| | | | | | | | 21 | 673.1 | 641.4 | 18 | 12 | 17 | 1.5 | | | 90 |
| 560 | 170 | 560 | 316 | 210 | 60 | 270 | 18 | 571.5 | 542.9 | 35 | 12 | 17 | 1.7 | 2.8 | 2LC0220-8AD0 | 140 |
| | | | | | | | 21 | 673.1 | 641.4 | 25 | 12 | 17 | 2.6 | | | 150 |
| 580 | 200 | 585 | 310 | 250 | 100 | 350 | 21 | 673.1 | 641.4 | 26 | 12 | 17 | 2 | 3.8 | 2LC0221-0AD0 | 170 |
| | | | | | | | 24 | 733.4 | 692.2 | 26 | 12 | 21 | 2.6 | | | 175 |
| 680 | 220 | 682 | 380 | 250 | 17 | 267 | 21 | 673.1 | 641.4 | 85 | 12 | 17 | 8.2 | 7 | 2LC0221-1AD0 | 265 |
| | | | | | | | 24 | 733.4 | 692.2 | 20 | 12 | 21 | 9.4 | | | 275 |

Configurable variants ¹⁾

- ØD2 Without finished bore
With finished bore
- Rubber version WN
NN
SN
NX

Notes

- The rubber disk element cannot be dismantled until the machines have been moved.
- Weight and mass moments of inertia apply to maximum bore diameters.

Ordering example


- ELPEX-S ESD coupling, size 680, WN rubber element version
- Bore ØD2 = 180H7 mm, with keyway to DIN 6885 and set screw, outer flange to SAE J620d size 24

Article no.: 2LC0221-1AD09-1KA0-Z M2B

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

TYPE ESDR

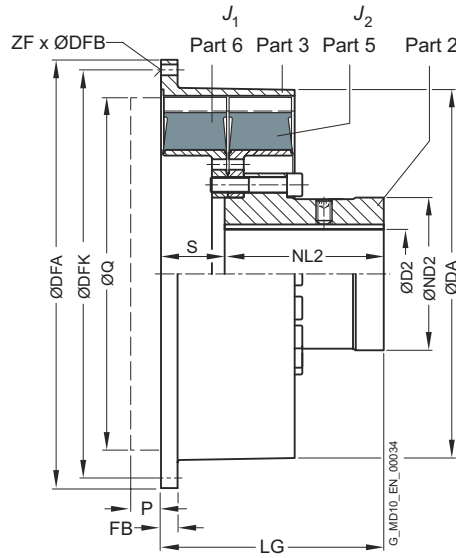

| Size | Dimensions in mm | | | | | | | | Flange connection dimensions | | | | | Mass moment of inertia | | Article no. ¹⁾ | Weight <i>m</i> kg | |
|------|-------------------------|-----|-----|-----|-----|----|-----|-----|------------------------------|-------|-------|----|----|------------------------|---|---------------------------|--------------------------|---|
| | D2 Keyway DIN 6885 max. | DA | ND2 | NL2 | S | P | Q | LG | SAE size | DFA | DFK | FB | ZF | DFB | <i>J</i> ₁ kgm ² | | | <i>J</i> ₂ kgm ² |
| 520 | 150 | 525 | 227 | 226 | 83 | 10 | 498 | 309 | 18 | 571.5 | 542.9 | 25 | 12 | 17 | 1 | 1.8 | 2LC0220-7AE0 | 105 |
| | | | | | | | | | 21 | 673.1 | 641.4 | 18 | 12 | 17 | 1.5 | | 2LC0220-7AE0 | 110 |
| 560 | 160 | 560 | 240 | 240 | 100 | 10 | 498 | 340 | 18 | 571.5 | 542.9 | 35 | 12 | 17 | 1.7 | 2.5 | 2LC0220-8AE0 | 135 |
| | | | | | | | | | 21 | 673.1 | 641.4 | 25 | 12 | 17 | 2.6 | | 2LC0220-8AE0 | 140 |
| 580 | 160 | 585 | 240 | 250 | 100 | 10 | 560 | 350 | 21 | 673.1 | 641.4 | 26 | 12 | 17 | 2 | 3.2 | 2LC0221-0AE0 | 145 |
| | | | | | | | | | 24 | 733.4 | 692.2 | 26 | 12 | 21 | 2.6 | | 2LC0221-0AE0 | 150 |
| 680 | 200 | 682 | 300 | 250 | 102 | 10 | 584 | 352 | 21 | 673.1 | 641.4 | 85 | 12 | 17 | 8.2 | 6.5 | 2LC0221-1AE0 | 260 |
| | | | | | | | | | 24 | 733.4 | 692.2 | 20 | 12 | 21 | 9.4 | | 2LC0221-1AE0 | 270 |
| 770 | 260 | 780 | 390 | 300 | 200 | 10 | 750 | 500 | - | 860.0 | 820.0 | 19 | 32 | - | 22.3 | 20 | 2LC0221-2AE0 | 540 |
| | | | | | | | | | - | 920.0 | 880.0 | 27 | 32 | 21 | 26 | | 2LC0221-2AE0 | 555 |
| | | | | | | | | | - | 995.0 | 950.0 | 27 | 32 | - | 31 | | 2LC0221-2AE0 | 600 |

Configurable variants¹⁾

- ØD2 Without finished bore
With finished bore
- Rubber version WN
NN
SN
NX

Notes

- Weight and mass moments of inertia apply to maximum bore diameters.
- P, Q = required space for radial dismounting of the rubber disk element.

Ordering example


- ELPEX-S ESDR coupling, size 560, WN rubber element version
- Bore ØD2 = 120H7 mm, with keyway to DIN 6885 and set screw, outer flange to SAE J620d size 21

Article no.: 2LC0220-8AE09-1JA0-Z M1S

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

TYPE ESNW

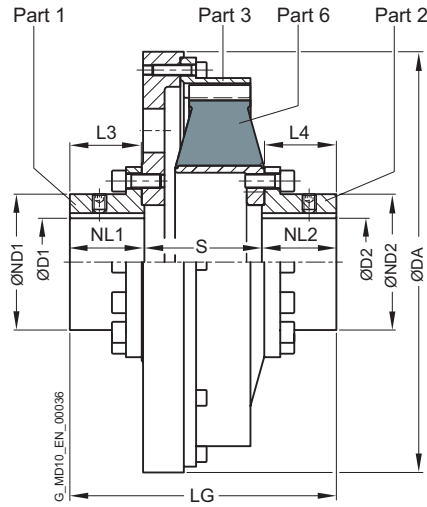

| Size | Dimensions in mm | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | Weight <i>m</i> kg |
|------|-------------------------------------|-----|---------|---------|-----|-----|-----|-----|---|---|---------------------------|--------------------------|
| | D1/D2 Keyway DIN 6885 max. | DA | ND1/ND2 | NL1/NL2 | L3 | L4 | S | LG | <i>J</i> ₁ kgm ² | <i>J</i> ₂ kgm ² | | |
| 265 | 50 | 275 | 78 | 65 | 62 | 66 | 68 | 198 | 0.11 | 0.017 | 2LC0220-1AG | 15 |
| 290 | 50 | 325 | 78 | 65 | 62 | 68 | 89 | 219 | 0.21 | 0.028 | 2LC0220-2AG | 22 |
| 320 | 65 | 365 | 98 | 87 | 84 | 92 | 105 | 279 | 0.37 | 0.042 | 2LC0220-3AG | 32 |
| 360 | 85 | 365 | 123 | 88 | 85 | 96 | 123 | 299 | 0.45 | 0.11 | 2LC0220-4AG | 43 |
| 420 | 100 | 480 | 155 | 85 | 82 | 94 | 134 | 304 | 1.5 | 0.3 | 2LC0220-5AG | 75 |
| 465 | 130 | 480 | 190 | 119 | 116 | 119 | 125 | 363 | 1.6 | 0.54 | 2LC0220-6AG | 89 |
| 520 | 150 | 585 | 227 | 162 | 159 | 161 | 123 | 447 | 4 | 0.94 | 2LC0220-7AG | 155 |
| 560 | 150 | 585 | 240 | 180 | 174 | 174 | 132 | 492 | 4.1 | 1.2 | 2LC0220-8AG | 160 |
| 580 | 160 | 685 | 240 | 200 | 195 | 198 | 145 | 545 | 5.5 | 1.6 | 2LC0221-0AG | 185 |
| 680 | 200 | 685 | 300 | 210 | 205 | 201 | 150 | 570 | 12 | 3.6 | 2LC0221-1AG | 315 |
| 770 | 260 | 870 | 390 | 255 | 250 | 253 | 180 | 690 | 27.2 | 12 | 2LC0221-2AG | 500 |

Configurable variants ¹⁾

| | |
|------------------|---|
| • ØD1 | Without finished bore With finished bore |
| • ØD2 | Without finished bore With finished bore |
| • Rubber version | WN NN SN NX |

Notes

- Weight and mass moments of inertia apply to maximum bore diameters.

Ordering example


- ELPEX-S ESNW coupling, size 520, WN rubber element version
- Bore ØD1 140H7 mm, keyway to DIN 6885 and set screw
- Bore ØD2 120H7 mm, keyway to DIN 6885 and set screw

Article no.: 2LC0220-7AG99-1AA0-Z L1V+M1S

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

TYPE ESDW

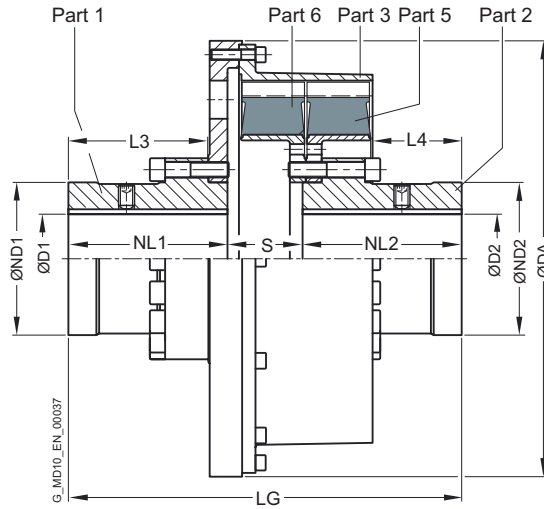

| Size | Dimensions in mm | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | Weight <i>m</i> kg |
|------|-------------------------------------|-----|---------|---------|-----|-----|-----|-----|---|---|---------------------------|--------------------------|
| | D1/D2 Keyway DIN 6885 max. | DA | ND1/ND2 | NL1/NL2 | L3 | L4 | S | LG | <i>J</i> ₁ kgm ² | <i>J</i> ₂ kgm ² | | |
| 520 | 150 | 585 | 227 | 226 | 201 | 135 | 100 | 552 | 4.7 | 1.8 | 2LC0220-7AH | 215 |
| 560 | 160 | 585 | 240 | 240 | 215 | 133 | 114 | 594 | 5.4 | 2.5 | 2LC0220-8AH | 250 |
| 580 | 160 | 685 | 240 | 250 | 220 | 140 | 120 | 620 | 10.1 | 3.2 | 2LC0221-0AH | 300 |
| 680 | 200 | 685 | 300 | 250 | 218 | 134 | 125 | 625 | 14.5 | 6.5 | 2LC0221-1AH | 440 |
| 770 | 260 | 870 | 390 | 300 | 265 | 238 | 220 | 820 | 40 | 20 | 2LC0221-2AH | 720 |

Configurable variants ¹⁾

| | |
|------------------|---|
| • ØD1 | Without finished bore With finished bore |
| • ØD2 | Without finished bore With finished bore |
| • Rubber version | WN NN SN NX |

Notes

- Weight and mass moments of inertia apply to maximum bore diameters.

Ordering example


- ELPEX-S ESDW coupling, size 520, WN rubber element version
- Bore ØD1 140H7 mm, keyway to DIN 6885 and set screw
- Bore ØD2 120H7 mm, keyway to DIN 6885 and set screw

Article no.: 2LC0220-7AH99-1AA0-Z L1V+M1S

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

➤ For online configuration on flender.com, click on the item no.

TYPE EST

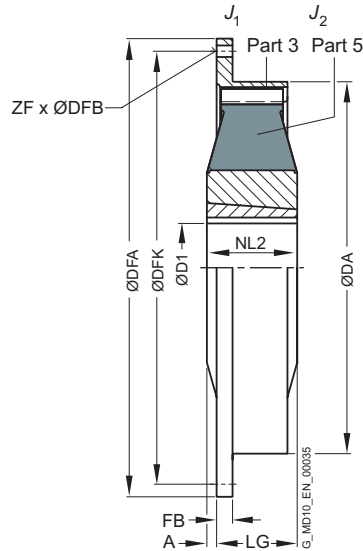

| Size | Taper Clamping Bush Size | Dimensions in mm | | | | | | Flange connection dimensions | | | | | Mass moment of inertia | | Article no. ¹⁾ | Weight <i>m</i> kg | | |
|------|--------------------------|-------------------------|------|-------|-----|----|----|------------------------------|-------|-------|-------|----|------------------------|---|---------------------------|--------------------------|---|-----|
| | | D1 Keyway DIN 6885 min. | max. | DA | NL2 | A | LG | SAE size | DFA | DFK | FB | ZF | DFB | <i>J</i> ₁ kgm ² | | | <i>J</i> ₂ kgm ² | |
| 220 | 2012 | 14 | 50 | 222 | 32 | 0 | 43 | 52 | 6.5 | 215.9 | 200.0 | 6 | 6 | 8.5 | 0.008 | 0.008 | 2LC0220-0AF0 | 3.6 |
| | | | | | | | | 7.5 | 241.3 | 222.3 | 33 | 8 | 8.5 | 0.008 | 2LC0220-0AF0 | | 3.5 | |
| | | | | | | | | 8 | 263.5 | 244.5 | 8 | 6 | 10.5 | 0.011 | 2LC0220-0AF0 | | 3.7 | |
| | | | | | | | | 10 | 314.3 | 295.3 | 8 | 8 | 10.5 | 0.020 | 2LC0220-0AF0 | | 4.2 | |
| 265 | 2517 | 16 | 60 | 263 | 45 | 3 | 42 | 8 | 263.5 | 244.5 | 33 | 6 | 0.011 | 0.019 | 2LC0220-1AF0 | 5.9 | | |
| | | | | | | | | 10 | 314.3 | 295.3 | 10 | 8 | 10.5 | | 0.017 | 2LC0220-1AF0 | 6.2 | |
| | | | | | | | | 11.5 | 352.4 | 333.4 | 10 | 8 | 0.024 | | 2LC0220-1AF0 | 6.5 | | |
| 290 | 2517 | 16 | 60 | 290 | 64 | 6 | 58 | 10 | 314.3 | 295.3 | 16 | 8 | 0.026 | 0.026 | 2LC0220-2AF0 | 8.5 | | |
| | | | | | | | | 11.5 | 352.4 | 333.4 | 16 | 8 | 10.5 | | 0.036 | 2LC0220-2AF0 | 8.8 | |
| 320 | 3030 | 35 | 75 | 318 | 76 | 2 | 73 | 11.5 | 352.4 | 333.4 | 16 | 8 | 0.062 | 0.06 | 2LC0220-3AF0 | 14 | | |
| | | | | | | | | 14 | 466.7 | 438.2 | 16 | 8 | 13 | | 0.18 | 2LC0220-3AF0 | 17 | |
| 360 | 3535 | 35 | 90 | 353.5 | 89 | 13 | 76 | 11.5 | 352.4 | 333.4 | 54 | 8 | 10.5 | 0.065 | 0.13 | 2LC0220-4AF0 | 21 | |
| | | | | | | | | 14 | 466.7 | 438.2 | 15 | 8 | 13 | 0.18 | | 2LC0220-4AF0 | 24 | |
| | | | | | | | | 14 | 466.7 | 438.2 | 18 | 8 | 13 | 0.22 | | 2LC0220-5AF0 | 37 | |
| 420 | 4040 | 40 | 100 | 420 | 102 | 10 | 92 | 16 | 517.5 | 489.0 | 18 | 8 | 13 | 0.32 | 0.33 | 2LC0220-5AF0 | 38 | |
| | | | | | | | | 18 | 571.5 | 542.9 | 18 | 6 | 17 | 0.47 | | 2LC0220-5AF0 | 41 | |
| | | | | | | | | 14 | 466.7 | 438.2 | 85 | 8 | 13 | 0.31 | | 2LC0220-6AF0 | 63 | |
| 465 | 4545 | 55 | 110 | 465 | 115 | 28 | 87 | 16 | 517.5 | 489.0 | 27 | 8 | 13 | 0.41 | 0.76 | 2LC0220-6AF0 | 64 | |
| | | | | | | | | 18 | 571.5 | 542.9 | 18 | 6 | 17 | 0.52 | | 2LC0220-6AF0 | 68 | |

Configurable variants ¹⁾

- ØD1 Without finished bore
With finished bore
- Rubber version WN
NN
SN
NX

Notes

- The rubber disk element cannot be dismantled until the machines have been moved.
- Weight and mass moments of inertia apply to maximum bore diameters.

Ordering example

- ELPEX-S EST coupling, size 265, WN rubber element version, with Taper clamping bush size 2517
- Bore ØD2 = 30 mm, outer flange to SAE J620d size 10

Article no.: 2LC0220-1AF99-1DA0-Z M05

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

SPARE AND WEAR PARTS


Rubber disk elements

| Size | ➤ Article No. set of rubber disk elements for a coupling | | | | | |
|--------------------------|--|-----------------------------|--------------------|--------------------|--------------------|--------------------|
| | Coupling type EST | | ESN | ESNR, ESNW | ESD | ESDR, ESDW |
| | without Taper clamping bush | with Taper clamping bush | | | | |
| WN rubber version | | | | | | |
| 220 | 2LC0220-0XL10-1AA0 | 2LC0220-0XL90-1AA0 | 2LC0220-0XJ00-1AA0 | | | |
| 265 | 2LC0220-1XL10-1AA0 | 2LC0220-1XL90-1AA0 | 2LC0220-1XJ00-1AA0 | 2LC0220-1XM00-1AA0 | | |
| 290 | 2LC0220-2XL10-1AA0 | 2LC0220-2XL90-1AA0 | 2LC0220-2XJ00-1AA0 | 2LC0220-2XM00-1AA0 | | |
| 320 | 2LC0220-3XL10-1AA0 | 2LC0220-3XL90-1AA0 | 2LC0220-3XJ00-1AA0 | 2LC0220-3XM00-1AA0 | | |
| 360 | 2LC0220-4XL10-1AA0 | 2LC0220-4XL90-1AA0 | 2LC0220-4XJ00-1AA0 | 2LC0220-4XM00-1AA0 | | |
| 420 | 2LC0220-5XL10-1AA0 | 2LC0220-5XL90-1AA0 | 2LC0220-5XJ00-1AA0 | 2LC0220-5XM00-1AA0 | | |
| 465 | 2LC0220-6XL10-1AA0 | 2LC0220-6XL90-1AA0 | 2LC0220-6XJ00-1AA0 | 2LC0220-6XM00-1AA0 | | |
| 520 | | | 2LC0220-7XJ00-1AA0 | 2LC0220-7XM00-1AA0 | 2LC0220-7XK00-1AA0 | 2LC0220-7XN00-1AA0 |
| 560 | | | 2LC0220-8XJ00-1AA0 | 2LC0220-8XM00-1AA0 | 2LC0220-8XK00-1AA0 | 2LC0220-8XN00-1AA0 |
| 580 | | | 2LC0221-0XJ00-1AA0 | 2LC0221-0XM00-1AA0 | 2LC0221-0XK00-1AA0 | 2LC0221-0XN00-1AA0 |
| 680 | | | 2LC0221-1XJ00-1AA0 | 2LC0221-1XM00-1AA0 | 2LC0221-1XK00-1AA0 | 2LC0221-1XN00-1AA0 |
| 770 | | | | 2LC0221-2XM00-1AA0 | | 2LC0221-2XN00-1AA0 |
| NN rubber version | | | | | | |
| 220 | 2LC0220-0XL10-2AA0 | 2LC0220-0XL90-2AA0 | 2LC0220-0XJ00-2AA0 | | | |
| 265 | 2LC0220-1XL10-2AA0 | 2LC0220-1XL90-2AA0 | 2LC0220-1XJ00-2AA0 | 2LC0220-1XM00-2AA0 | | |
| 290 | 2LC0220-2XL10-2AA0 | 2LC0220-2XL90-2AA0 | 2LC0220-2XJ00-2AA0 | 2LC0220-2XM00-2AA0 | | |
| 320 | 2LC0220-3XL10-2AA0 | 2LC0220-3XL90-2AA0 | 2LC0220-3XJ00-2AA0 | 2LC0220-3XM00-2AA0 | | |
| 360 | 2LC0220-4XL10-2AA0 | 2LC0220-4XL90-2AA0 | 2LC0220-4XJ00-2AA0 | 2LC0220-4XM00-2AA0 | | |
| 420 | 2LC0220-5XL10-2AA0 | 2LC0220-5XL90-2AA0 | 2LC0220-5XJ00-2AA0 | 2LC0220-5XM00-2AA0 | | |
| 465 | 2LC0220-6XL10-2AA0 | 2LC0220-6XL90-2AA0 | 2LC0220-6XJ00-2AA0 | 2LC0220-6XM00-2AA0 | | |
| 520 | | | 2LC0220-7XJ00-2AA0 | 2LC0220-7XM00-2AA0 | 2LC0220-7XK00-2AA0 | 2LC0220-7XN00-2AA0 |
| 560 | | | 2LC0220-8XJ00-2AA0 | 2LC0220-8XM00-2AA0 | 2LC0220-8XK00-2AA0 | 2LC0220-8XN00-2AA0 |
| 580 | | | 2LC0221-0XJ00-2AA0 | 2LC0221-0XM00-2AA0 | 2LC0221-0XK00-2AA0 | 2LC0221-0XN00-2AA0 |
| 680 | | | 2LC0221-1XJ00-2AA0 | 2LC0221-1XM00-2AA0 | 2LC0221-1XK00-2AA0 | 2LC0221-1XN00-2AA0 |
| 770 | | | | 2LC0221-2XM00-2AA0 | | 2LC0221-2XN00-2AA0 |
| SN rubber version | | | | | | |
| 220 | 2LC0220-0XL10-3AA0 | 2LC0220-0XL90-3AA0 | 2LC0220-0XJ00-3AA0 | | | |
| 265 | 2LC0220-1XL10-3AA0 | 2LC0220-1XL90-3AA0 | 2LC0220-1XJ00-3AA0 | 2LC0220-1XM00-3AA0 | | |
| 290 | 2LC0220-2XL10-3AA0 | 2LC0220-2XL90-3AA0 | 2LC0220-2XJ00-3AA0 | 2LC0220-2XM00-3AA0 | | |
| 320 | 2LC0220-3XL10-3AA0 | 2LC0220-3XL90-3AA0 | 2LC0220-3XJ00-3AA0 | 2LC0220-3XM00-3AA0 | | |
| 360 | 2LC0220-4XL10-3AA0 | 2LC0220-4XL90-3AA0 | 2LC0220-4XJ00-3AA0 | 2LC0220-4XM00-3AA0 | | |
| 420 | 2LC0220-5XL10-3AA0 | 2LC0220-5XL90-3AA0 | 2LC0220-5XJ00-3AA0 | 2LC0220-5XM00-3AA0 | | |
| 465 | 2LC0220-6XL10-3AA0 | 2LC0220-6XL90-3AA0 | 2LC0220-6XJ00-3AA0 | 2LC0220-6XM00-3AA0 | | |
| 520 | | | 2LC0220-7XJ00-3AA0 | 2LC0220-7XM00-3AA0 | 2LC0220-7XK00-3AA0 | 2LC0220-7XN00-3AA0 |
| 560 | | | 2LC0220-8XJ00-3AA0 | 2LC0220-8XM00-3AA0 | 2LC0220-8XK00-3AA0 | 2LC0220-8XN00-3AA0 |
| 580 | | | 2LC0221-0XJ00-3AA0 | 2LC0221-0XM00-3AA0 | 2LC0221-0XK00-3AA0 | 2LC0221-0XN00-3AA0 |
| 680 | | | 2LC0221-1XJ00-3AA0 | 2LC0221-1XM00-3AA0 | 2LC0221-1XK00-3AA0 | 2LC0221-1XN00-3AA0 |
| 770 | | | | 2LC0221-2XM00-3AA0 | | 2LC0221-2XN00-3AA0 |
| NX rubber version | | | | | | |
| 220 | 2LC0220-0XL10-4AA0 | 2LC0220-0XL90-4AA0 | 2LC0220-0XJ00-4AA0 | | | |
| 265 | 2LC0220-1XL10-4AA0 | 2LC0220-1XL90-4AA0 | 2LC0220-1XJ00-4AA0 | 2LC0220-1XM00-4AA0 | | |
| 290 | 2LC0220-2XL10-4AA0 | 2LC0220-2XL90-4AA0 | 2LC0220-2XJ00-4AA0 | 2LC0220-2XM00-4AA0 | | |
| 320 | 2LC0220-3XL10-4AA0 | 2LC0220-3XL90-4AA0 | 2LC0220-3XJ00-4AA0 | 2LC0220-3XM00-4AA0 | | |
| 360 | 2LC0220-4XL10-4AA0 | 2LC0220-4XL90-4AA0 | 2LC0220-4XJ00-4AA0 | 2LC0220-4XM00-4AA0 | | |
| 420 | 2LC0220-5XL10-4AA0 | 2LC0220-5XL90-4AA0 | 2LC0220-5XJ00-4AA0 | 2LC0220-5XM00-4AA0 | | |
| 465 | 2LC0220-6XL10-4AA0 | 2LC0220-6XL90-4AA0 | 2LC0220-6XJ00-4AA0 | 2LC0220-6XM00-4AA0 | | |
| 520 | | | 2LC0220-7XJ00-4AA0 | 2LC0220-7XM00-4AA0 | 2LC0220-7XK00-4AA0 | 2LC0220-7XN00-4AA0 |
| 560 | | | 2LC0220-8XJ00-4AA0 | 2LC0220-8XM00-4AA0 | 2LC0220-8XK00-4AA0 | 2LC0220-8XN00-4AA0 |
| 580 | | | 2LC0221-0XJ00-4AA0 | 2LC0221-0XM00-4AA0 | 2LC0221-0XK00-4AA0 | 2LC0221-0XN00-4AA0 |
| 680 | | | 2LC0221-1XJ00-4AA0 | 2LC0221-1XM00-4AA0 | 2LC0221-1XK00-4AA0 | 2LC0221-1XN00-4AA0 |
| 770 | | | | 2LC0221-2XM00-4AA0 | | 2LC0221-2XN00-4AA0 |

Notes

- The ELPEX-S coupling rubber disk elements are wear parts. The service life depends on the operating conditions.

HIGHLY FLEXIBLE COUPLINGS – ELPEX SERIES




| | |
|---|--------------|
| General | 12/3 |
| Benefits | 12/3 |
| Application | 12/3 |
| Design and configurations | 12/4 |
| Configuration | 12/5 |
| Technical specifications | 12/7 |
| <hr/> | |
| Type ENG | 12/8 |
| <hr/> | |
| Type ENGS – with fail-safe device | 12/10 |
| <hr/> | |
| Types EFG | 12/12 |
| <hr/> | |
| Types EFGS – with fail-safe device | 12/14 |
| <hr/> | |
| Spare and wear parts | 12/16 |
| <hr/> | |



ELPEX
FLENDER

GENERAL



ELPEX couplings are highly torsionally flexible and free of torsional backlash. Because of their low torsional stiffness and damping capacity, ELPEX couplings are especially suitable for coupling machines with a very non uniform torque pattern. ELPEX couplings are also suitable for connecting machines with high shaft misalignment. Standard ELPEX coupling types are designed as shaft-shaft connections or flange-shaft connections. Application-related types can be implemented on request.

Benefits

The ELPEX coupling is suitable for horizontal and vertical mounting positions or mounting at any required angle. The coupling parts can be arranged as required on the shafts to be connected.

The split flexible rings can be changed without having to move the coupled machines.

The flexible rings are mounted without backlash and give the coupling progressive torsional stiffness, i.e. torsional stiffness increases in proportion to coupling load.

The ELPEX coupling is especially suitable for reversing operation or operation with changing directions of load.

The coupling is delivered preassembled. The flexible rings are completely assembled. On the type ENG, the coupling halves have to be bolted together after the hub has been mounted. On the type EFG, after mounting the coupling hub, only the outer flange has to be connected to the machine.

Outer flanges with different connection dimensions are available for the type EFG.

If the flexible rings are irreparably damaged or worn, the metal parts can rotate freely against one another, they are not in contact with one another.

Application

The ELPEX coupling is available in 9 sizes with a nominal torque of between 1600 Nm and 90000 Nm. The coupling is suitable for ambient temperatures of between -40 °C and +80 °C.

The ELPEX coupling is frequently used for high-quality drives which have to guarantee very long service life in harsh operating conditions.

Examples of applications are mill drives in the cement industry, marine main and secondary drives or drives on large excavators powered by an electric motor or diesel engine.

GENERAL

Design and configurations

The ELPEX coupling's transmission characteristic is determined essentially by the flexible rings. The flexible rings are manufactured from a natural rubber mixture with a multiply fabric lining. The flexible rings are split so that they can be changed without having to move the coupled machines.

The flexible rings are fastened to the hub with a clamping ring and to the outer flange with a clamping ring, using pins and bolts.

On the EFG type, the outer flange is designed with connection dimensions for connection to e.g. a diesel engine flywheel. On ENG types, the outer flange is fitted to a second hub part, which then enables the shaft-shaft connection.

Materials

| | Type | Cast iron | Steel |
|---------------------------------|------|---------------------------|-------|
| Hub part 1 | | Grey cast iron EN-GJL-250 | Steel |
| Hub part 2 | | Steel | Steel |
| Retaining ring, outer ENG, ENGS | | Grey cast iron EN-GJL-250 | Steel |
| Outer flange EFG, EFGS | | Grey cast iron EN-GJL-250 | Steel |

Flexible ring materials

| Material/Description | Hardness | Marking | Ambient temperature |
|----------------------|-----------|----------|---------------------|
| Natural rubber | 70 ShoreA | Size - 2 | -40 ... +80 °C |


ELPEX coupling types

| Type | Description |
|------|-------------------------------------|
| ENG | Coupling as shaft-shaft connection |
| EFG | Coupling as flange-shaft connection |
| ENGS | as ENG with fail-safe device |
| EFGS | as EFG with fail-safe device |


Further application-specific coupling types are available. Dimension sheets for and information on these are available on request.

The following versions have already been implemented a number of times:

- ELPEX coupling with brake drum, brake disk or flywheel mass
- ELPEX coupling with axial backlash limiter
- ELPEX coupling with adapter
- ELPEX coupling in combination with a safety slip clutch
- ELPEX coupling for engaging/disengaging during stand-still ELPEX coupling as part of a coupling combination

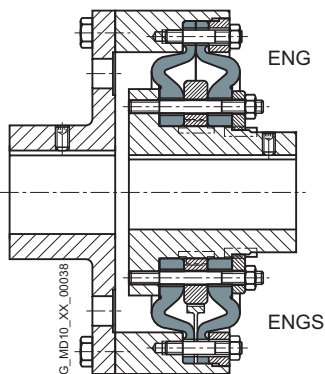


Types ENG/ENGS

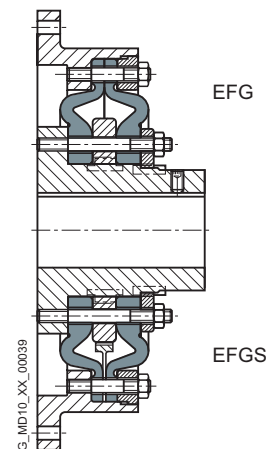

Types EFG/EFGS

Fail-safe device of ELPEX coupling

Types ENGS and EFGS are provided with a fail-safe device. In normal operation the torsion angle of the flexible rings is smaller than the gap between the cams. In normal operation there is no metal-metal contact. If the flexible rings fail, cams transmit the torque from the inner part and outer part. These enable the coupling to be used in emergency mode for a short time. This option is frequently required e.g. in the case of marine drives.

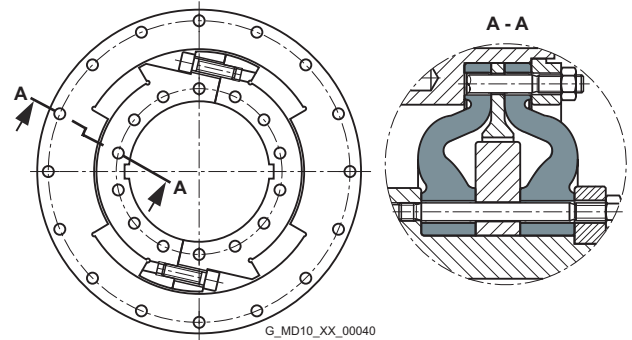

Fail-safe device

Configuration

Coupling selection

The ELPEX-S coupling is especially suitable for rough operating environments. An application factor lower than that in Chapter E is therefore sufficient for all applications.

In the case of machines which excite torsional vibration, Flender urgently recommends carrying out a torsional vibration calculation or measuring the coupling load occurring in the drive.

Coupling load in continuous operation

The operating principles of the driving and driven machines are divided into categories and the application factor FB derived from these in accordance with DIN 3990-1.

Examples of torque characteristic in driven machines:

- uniform with moderate shock loads: Generators, fans, blowers
- non uniform: Reciprocating compressors, mixers, conveyor systems
- very rough: crushers, excavators, presses, mills

| Application factor FB | Torque characteristic of the driven machine | | |
|---|---|-------------|------------|
| | uniform with moderate shock loads | non uniform | very rough |
| Electric motors, hydraulic motors, gas and water turbines | 1.0 | 1.3 | 1.4 |
| Internal-combustion engines | 1.3 | 1.4 | 1.6 |

| Temperature factor FT | | Temperature T_a on the coupling | | | | |
|-----------------------|--------------------|-----------------------------------|------------------|-------------|-------------|-------------|
| Coupling | Elastomer material | -40 up to -30 °C | -30 up to +50 °C | up to 60 °C | up to 70 °C | up to 80 °C |
| ELPEX | NR | 1.1 | 1.0 | 1.25 | 1.40 | 1.60 |

NR = Natural rubber mixture

Coupling size $T_{KN} \geq T_N \cdot FB \cdot FT$

GENERAL

Coupling load under maximum and overload conditions

The maximum torque is the highest load acting on the coupling in normal operation.

Maximum torques at a frequency of up to 25 times an hour are permitted and must be lower than the maximum coupling torque. Examples of maximum torque conditions are: Starting operations, stopping operations or usual operating conditions with maximum load.

$$T_{K_{\max}} \geq T_{\text{Max}} \cdot FT$$

Overload torques are maximum loads which occur only in combination with special, infrequent operating conditions. Examples of overload torque conditions are: Motor short circuit, emergency stop or blocking because of component breakage. Overload torques at a frequency of once a month are permitted and must be lower than the maximum overload torque of the coupling. The overload condition may last only a short while, i.e. fractions of a second.

$$T_{K_{OL}} \geq T_{OL} \cdot FT$$

Coupling load due to dynamic torque load

Applying the frequency factor FF, the dynamic torque load must be lower than the coupling fatigue torque.

Dynamic torque load

$$T_{KW} \geq T_W \cdot FT \cdot FF$$

Frequency of the dynamic torque load

$$f_{\text{err}} \leq 10 \text{ Hz frequency factor } FF = 1.0$$

Frequency of the dynamic torque load

$$f_{\text{err}} > 10 \text{ Hz frequency factor } FF = \sqrt{(f_{\text{err}}/10 \text{ Hz})}$$

Checking the maximum speed

For all load situations $n_{K_{\max}} \geq n_{\text{max}}$

Checking permitted shaft misalignment and restorative forces

For all load situations, the actual shaft misalignment must be less than the permitted shaft misalignment.

Checking bore diameter, mounting geometry and coupling design

The check must be made on the basis of the dimension tables. On request, couplings with adapted geometry can be provided.

Checking shaft-hub connection

For any information on this, please refer to **Page E/18**.

Checking low temperature and chemically aggressive environment

The permitted coupling temperature is specified in the Temperature Factor FT table. In the case of chemically aggressive environments, please consult the manufacturer.

Technical specifications

| Power ratings of the ELPEX series | | | | | | | | | | |
|-----------------------------------|--------------------------------|------------------------------------|------------------------------------|----------------------------------|---|------------------------|-----------------------|--|------------------------------|----------------------------|
| Size | Rated torque T_{KN} Nm | Maximum torque T_{Kmax} Nm | Overload torque T_{KOL} Nm | Fatigue torque T_{KW} Nm | Dynamic torsional stiffness for 100 % load C_{Tdyn} kNm/rad | Stiffness | | Permitted shaft misalignment at speed $n = 1500$ rpm | | |
| | | | | | | Axial C_a N/mm | Radial C_r mm | Axial ΔK_a mm | Radial ΔK_r mm | Angle ΔK_w ° |
| 270 | 1600 | 4800 | 6400 | 640 | 22 | 660 | 770 | 2.2 | 2.2 | 0.2 |
| 320 | 2800 | 8400 | 11200 | 1120 | 38 | 780 | 910 | 2.6 | 2.6 | 0.2 |
| 375 | 4500 | 13500 | 18000 | 1800 | 63 | 970 | 1130 | 3 | 3 | 0.2 |
| 430 | 7100 | 21300 | 28400 | 2840 | 97 | 1160 | 1350 | 3.4 | 3.4 | 0.2 |
| 500 | 11200 | 33600 | 44800 | 4480 | 155 | 1410 | 1630 | 3.8 | 3.8 | 0.2 |
| 590 | 18000 | 54000 | 72000 | 7200 | 240 | 1710 | 1990 | 4.2 | 4.2 | 0.2 |
| 690 | 28000 | 84000 | 112000 | 11200 | 365 | 2060 | 2390 | 4.6 | 4.6 | 0.2 |
| 840 | 45000 | 135000 | 180000 | 18000 | 685 | 2570 | 2990 | 5 | 5 | 0.2 |
| 970 | 90000 | 270000 | 360000 | 36000 | 1100 | 3020 | 3510 | 5.5 | 5.5 | 0.2 |

Torsional stiffness and damping

The dynamic torsional stiffness is load-dependent and increases in proportion to capacity utilization. The values specified in the selection table apply to a capacity utilization of 100 %. The following table shows the correction factors for different rated loads.

$$C_{Tdyn} = C_{Tdyn\ 1000\ \%} \cdot FK_C$$

| | Load T_N / T_{KN} | | | | | | |
|--------------------------|---------------------|------|------|------|------|------|------|
| | 20% | 50% | 60% | 70% | 80% | 100% | 200% |
| Correction factor FK_C | 0.3 | 0.56 | 0.65 | 0.74 | 0.82 | 1 | 1.9 |

The damping coefficient is $\Psi = 1.1$

Torsional stiffness also depends on the ambient temperature and the frequency and amplitude of the torsional vibration excitation. More precise torsional stiffness and damping parameters on request.

With flexible couplings the manufacturing process of the rubber elements and their aging primarily influence the stiffness value C_{Tdyn} . For this reason calculation must be made with a tolerance for the dynamic stiffness of $\pm 20\ %$. The specified damping coefficient Ψ is a minimum value with the result that the damping performance of the coupling corresponds at least to the specified value.


Permitted shaft misalignment

The permitted shaft misalignment depends on the operating speed. As the speed increases, lower shaft misalignment values are permitted. The correction factors for different speeds are specified in the following table. The maximum speed for the respective coupling size must be noted!


$$\Delta K_{perm} = \Delta K_{1500} \cdot FK_V$$

| | Speed in rpm | | | |
|--------------------------|--------------|------|------|------|
| | 500 | 1000 | 1500 | 3000 |
| Correction factor FK_V | 1.6 | 1.25 | 1.0 | 0.7 |

TYPE ENG

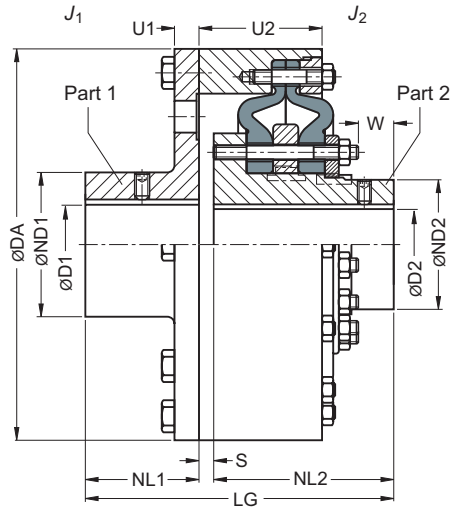

Sizes 270 ... 430

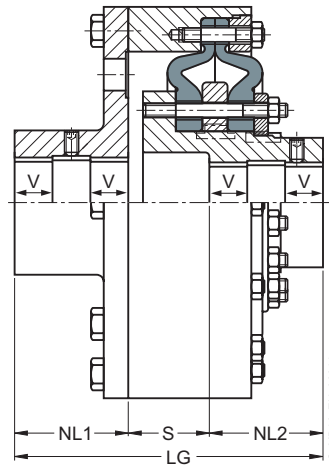

Sizes 500 ... 970

| Size | Rated torque T_{KN} Nm | Maximum speed | | Dimensions in mm | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | | Weight m kg | | | | | | |
|------|--------------------------------|--------------------------------|----------------------------|------------------|-----|-----|-----|---------------------------|---------------------------|-----------|-------|------------------------|-----|---------------------------|-------|---------------------|-----|------|-------|-------------|-------------|------|
| | | Cast iron n_{Kmax} rpm | Steel n_{Kmax} rpm | Keyway DIN 6885 | | | | J_1 kgm ² | J_2 kgm ² | Cast iron | Steel | | | | | | | | | | | |
| D1 | D2 | DA | ND1 | ND2 | NL1 | NL2 | S | | | | | U1 | U2 | W | LG | | | | | | | |
| 270 | 1600 | 3000 | 4250 | 45 | 80 | 45 | 70 | 270 | 128 | 94 | 80 | 155 | 10 | 14 | 86 | 42 | 245 | 0.21 | 0.037 | 2LC0200-3AF | 2LC0200-3AL | 29 |
| 320 | 2800 | 2500 | 3600 | 55 | 100 | 55 | 85 | 320 | 160 | 115 | 100 | 180 | 6 | 16 | 97.5 | 48 | 286 | 0.49 | 0.082 | 2LC0200-4AF | 2LC0200-4AL | 50 |
| 375 | 4500 | 2100 | 3100 | 65 | 115 | 65 | 105 | 375 | 184 | 143 | 120 | 205 | 10 | 18 | 111.8 | 62 | 335 | 1.0 | 0.21 | 2LC0200-5AF | 2LC0200-5AL | 80 |
| 430 | 7100 | 1900 | 2650 | 75 | 130 | 75 | 120 | 430 | 208 | 165 | 140 | 235 | 8 | 22 | 126 | 68 | 383 | 2.0 | 0.37 | 2LC0200-6AF | 2LC0200-6AL | 113 |
| 500 | 11200 | 1600 | 2300 | 90 | 150 | 90 | 150 | 500 | 240 | 202 | 160 | 160 | 112 | 25 | 139.7 | 80 | 432 | 3.9 | 0.85 | 2LC0200-7AF | 2LC0200-7AL | 174 |
| 590 | 18000 | 1360 | 2000 | 100 | 140 | 100 | 170 | 590 | 224 | 230 | 190 | 190 | 130 | 28 | 162.7 | 95 | 510 | 8.2 | 1.7 | 2LC0200-8AF | 2LC0200-8AL | 254 |
| | | | | 140 | 180 | | 224 | 16.3 | 350 | | | | | | | | | | | | | |
| 690 | 28000 | 1200 | 1650 | 110 | 140 | 110 | 200 | 690 | 288 | 278 | 220 | 220 | 140 | 32 | 175.6 | 102 | 580 | 16.8 | 3.7 | 2LC0201-0AF | 2LC0201-0AL | 370 |
| | | | | 180 | 210 | | 336 | 16.9 | 385 | | | | | | | | | | | | | |
| 840 | 45000 | 1000 | 1350 | 140 | 180 | 140 | 240 | 840 | 288 | 340 | 280 | 280 | 125 | 42 | 231 | 105 | 685 | 49 | 11 | 2LC0201-1AF | 2LC0201-1AL | 700 |
| | | | | 180 | 220 | | 352 | 50 | 725 | | | | | | | | | | | | | |
| 970 | 90000 | 850 | 1180 | 160 | 200 | 160 | 280 | 970 | 384 | 390 | 350 | 350 | 167 | 70 | 290 | 137 | 867 | 104 | 26 | 2LC0201-2AF | 2LC0201-2AL | 1265 |
| | | | | 200 | 240 | | 448 | 106 | 1310 | | | | | | | | | | | | | |
| | | | | 240 | 280 | | | | 512 | | | | | | | | | 110 | | | | 1350 |
| | | | | 280 | 320 | | | | | | | | | | | | | 115 | | | | 1410 |

Configurable variants ¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

Notes

- The hub diameter of the component part is assigned according to the diameter of the finished bore. Where bore diameters overlap, the component with the smaller hub diameter is always selected.
- Weights and mass moments of inertia apply to cast iron version with maximum bore.
- From size 500, the bores D1 and D2 are each provided with a recess of $D = +1$ mm halfway along the hub. $V \approx 1/3$ NL.

Ordering example

- ELPEX ENG coupling, size 690, cast iron version
- Bore $\varnothing D1 = 180H7$ mm with keyway to DIN 6885 and set screw, the hub diameter $ND1 = 288$ mm is thus assigned
- Bore $\varnothing D2 = 200H7$ mm with keyway to DIN 6885 and set screw, the hub diameter $ND2 = 278$ mm is thus assigned


Article no.: **2LC0201-0AF99-0AA0-Z L2B+M2D**

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](https://www.flender.com).


➤ For online configuration on [flender.com](https://www.flender.com), click on the item no.

TYPE ENGS

with fail-safe device

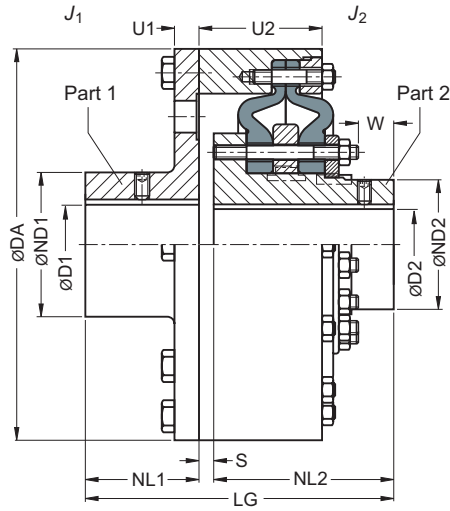

Sizes 270 ... 430

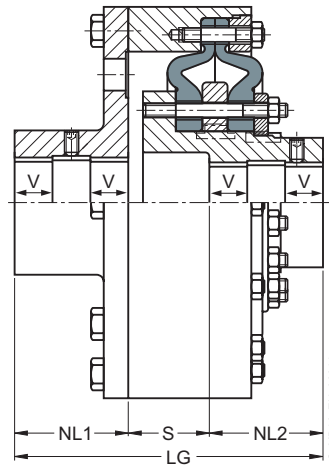

Sizes 500 ... 970

| Size | Rated torque T_{KN} Nm | Maximum speed | | Dimensions in mm | | | | | | | | | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | | Weight m kg |
|------|--------------------------------|-------------------|-------------------|------------------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-------|-----|-----|---------------------------|---------------------------|------------------------|-------------|---------------------------|------|---------------------|
| | | n_{Kmax} rpm | n_{Kmax} rpm | Keyway DIN 6885 | | | | DA | ND1 | ND2 | NL1 | NL2 | S | U1 | U2 | W | LG | J_1 kgm ² | J_2 kgm ² | Cast iron | Steel | | | |
| 270 | 1600 | 3000 | 4250 | 45 | 80 | 45 | 70 | 270 | 128 | 94 | 80 | 155 | 10 | 14 | 86 | 42 | 245 | 0.21 | 0.037 | 2LC0200-3AG | 2LC0200-3AM | 29 | | |
| 320 | 2800 | 2500 | 3600 | 55 | 100 | 55 | 85 | 320 | 160 | 115 | 100 | 180 | 6 | 16 | 97.5 | 48 | 286 | 0.49 | 0.082 | 2LC0200-4AG | 2LC0200-4AM | 50 | | |
| 375 | 4500 | 2100 | 3100 | 65 | 115 | 65 | 105 | 375 | 184 | 143 | 120 | 205 | 10 | 18 | 111.8 | 62 | 335 | 1.0 | 0.21 | 2LC0200-5AG | 2LC0200-5AM | 80 | | |
| 430 | 7100 | 1900 | 2650 | 75 | 130 | 75 | 120 | 430 | 208 | 165 | 140 | 235 | 8 | 22 | 126 | 68 | 383 | 2.0 | 0.37 | 2LC0200-6AG | 2LC0200-6AM | 113 | | |
| 500 | 11200 | 1600 | 2300 | 90 | 150 | 90 | 150 | 500 | 240 | 202 | 160 | 160 | 112 | 25 | 139.7 | 80 | 432 | 3.9 | 0.85 | 2LC0200-7AG | 2LC0200-7AM | 174 | | |
| 590 | 18000 | 1360 | 2000 | 100 | 140 | 100 | 170 | 590 | 224 | 230 | 190 | 190 | 130 | 28 | 162.7 | 95 | 510 | 8.2 | 1.7 | 2LC0200-8AG | 2LC0200-8AM | 254 | | |
| | | | | 140 | 180 | | 224 | | 16.3 | | | | | | | | | 350 | | | | | | |
| 690 | 28000 | 1200 | 1650 | 110 | 140 | 110 | 200 | 690 | 288 | 278 | 220 | 220 | 140 | 32 | 175.6 | 102 | 580 | 16.8 | 3.7 | 2LC0201-0AG | 2LC0201-0AM | 370 | | |
| | | | | 180 | 210 | | 336 | | 16.9 | | | | | | | | | 385 | | | | | | |
| 840 | 45000 | 1000 | 1350 | 140 | 180 | 140 | 240 | 840 | 288 | 340 | 280 | 280 | 125 | 42 | 231 | 105 | 685 | 49 | 11 | 2LC0201-1AG | 2LC0201-1AM | 700 | | |
| | | | | 180 | 220 | | 352 | | 50 | | | | | | | | | 725 | | | | | | |
| 970 | 90000 | 850 | 1180 | 160 | 200 | 160 | 280 | 970 | 320 | 384 | 390 | 350 | 350 | 167 | 70 | 290 | 137 | 867 | 104 | 26 | 2LC0201-2AG | 2LC0201-2AM | 1265 | |
| | | | | 200 | 240 | | 448 | | 106 | | | | | | | | | | 1310 | | | | | |
| | | | | 240 | 280 | | | | 512 | | | | | | | | | 110 | | | | 1350 | | |
| | | | | 280 | 320 | | | | | | | | | | | | | 115 | | | | 1410 | | |

Configurable variants ¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

Notes

- The hub diameter of the component part is assigned according to the diameter of the finished bore. Where bore diameters overlap, the component with the smaller hub diameter is always selected.
- Weights and mass moments of inertia apply to cast iron version with maximum bore.
- From size 500, the bores D1 and D2 are each provided with a recess of $D = +1$ mm halfway along the hub. $V \approx 1/3$ NL.

Ordering example


- ELPEX ENGS coupling, size 690, cast iron version
- Bore $\varnothing D1 = 180H7$ mm with keyway to DIN 6885 and set screw, the hub diameter $ND1 = 288$ mm is thus assigned
- Bore $\varnothing D2 = 200H7$ mm with keyway to DIN 6885 and set screw, the hub diameter $ND2 = 278$ mm is thus assigned

Article no.: **2LC0201-0AG99-0AA0-Z L2B+M2D**

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](https://www.flender.com).

➤ For online configuration on [flender.com](https://www.flender.com), click on the item no.

TYPES EFG

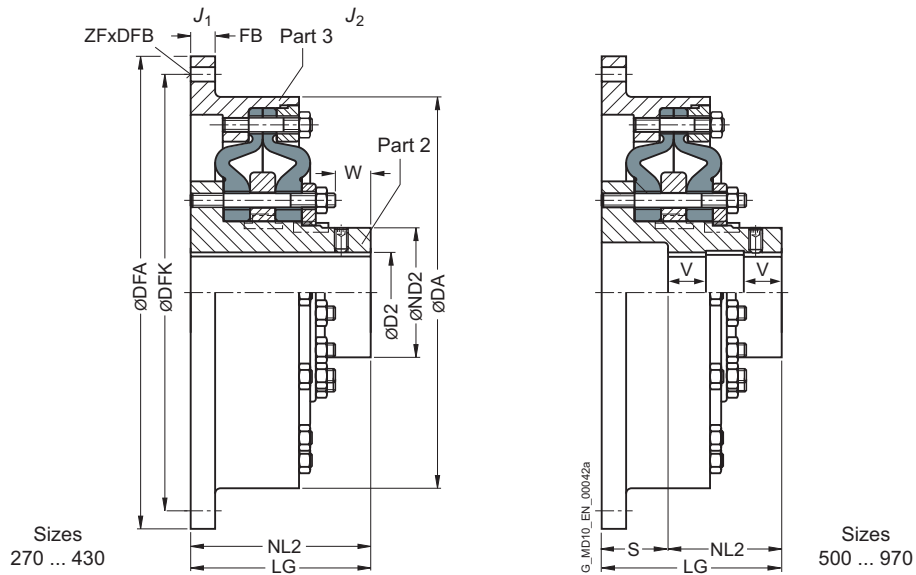

12

| Size | Rated torque T_{KN} Nm | Maximum speed | | Dimensions in mm | | | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | | Weight m kg | | | |
|------|--------------------------------|-------------------|-------|---|-----|-----|-----|-----|-----|----|--|-----------------------------------|---------------------|------------------------|-----|---------------------------|---------------------------|---------------------|--------------|--------------|-------|
| | | Type Cast iron | Steel | D2 Keyway DIN 6885 min. max. | DA | ND2 | NL2 | S | W | LG | Flange connection dimensions ²⁾ | | | | | J_1 kgm ² | J_2 kgm ² | | Type | Cast iron | Steel |
| | | | | | | | | | | | DFA | DFK | FB | ZF | DFB | | | | | | |
| 270 | 1600 | 3000 | 4250 | 45 | 70 | 270 | 94 | 155 | - | 42 | 155 | 466.7 ₉₇ ²⁾ | 438.2 ²⁾ | 12 | 8 | 13 | 0.47 | 0.037 | 2LC0200-3AB2 | 2LC0200-3AJ2 | 27 |
| | | | | | | | | | | | | 325 ₆ | 300 | | 8 | 14 | 0.16 | | 2LC0200-3AB1 | 2LC0200-3AJ1 | 19 |
| 320 | 2800 | 2500 | 3600 | 55 | 85 | 320 | 115 | 180 | - | 48 | 180 | 517.5 ₉₇ ²⁾ | 489 ²⁾ | 14 | 8 | 13 | 0.87 | 0.082 | 2LC0200-4AB2 | 2LC0200-4AJ2 | 42 |
| | | | | | | | | | | | | 392 ₆ | 360 | | 8 | 18 | 0.39 | | 2LC0200-4AB1 | 2LC0200-4AJ1 | 33.5 |
| 375 | 4500 | 2100 | 3100 | 65 | 105 | 375 | 143 | 205 | - | 62 | 205 | 571.5 ₉₇ ²⁾ | 542.9 ²⁾ | 16 | 6 | 17 | 1.5 | 0.21 | 2LC0200-5AB2 | 2LC0200-5AJ2 | 65 |
| | | | | | | | | | | | | 448 ₆ | 415 | | 8 | 18 | 0.78 | | 2LC0200-5AB1 | 2LC0200-5AJ1 | 53 |
| 430 | 7100 | 1900 | 2650 | 75 | 120 | 430 | 165 | 235 | - | 68 | 235 | 673.1 ₉₇ ²⁾ | 641.4 ²⁾ | 20 | 12 | 17 | 3.4 | 0.37 | 2LC0200-6AB2 | 2LC0200-6AJ2 | 100 |
| | | | | | | | | | | | | 515 ₆ | 475 | | 8 | 22 | 1.5 | | 2LC0200-6AB1 | 2LC0200-6AJ1 | 78 |
| 500 | 11200 | 1600 | 2300 | 90 | 150 | 500 | 202 | 160 | 100 | 80 | 260 | 673.1 ₉₇ ²⁾ | 641.4 ²⁾ | 20 | 12 | 17 | 4.0 | 0.85 | 2LC0200-7AB2 | 2LC0200-7AJ2 | 150 |
| | | | | | | | | | | | | 585 ₆ | 545 | | 10 | 22 | 2.7 | | 2LC0200-7AB1 | 2LC0200-7AJ1 | 140 |

Configurable variants ¹⁾

- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

²⁾ The upper line for the flange connection dimensions complies with standard SAE J620d or DIN 6288.

↗ For online configuration on flender.com, click on the item no.

| Size | Rated torque T_{KN} Nm | Maximum speed | | Dimensions in mm | | | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | | Weight m kg | | | |
|------|--------------------------------|--|----------------------------|---|-----|-----|-----|-----|-----|-----|--|------------------------------------|--------------------------|------------------------|-----|---------------------------|---------------------------|---------------------|-------------------|--------------|------|
| | | Type Cast iron n_{Kmax} rpm | Steel n_{Kmax} rpm | D2 Keyway DIN 6885 min. max. | DA | ND2 | NL2 | S | W | LG | Flange connection dimensions ²⁾ | | | | | J_1 kgm ² | J_2 kgm ² | | Type Cast iron | Steel | |
| | | | | | | | | | | | DFA | DFK | FB | ZF | DFB | | | | | | |
| 590 | 18000 | 1350 | 2000 | 100 | 170 | 590 | 230 | 190 | 120 | 95 | 310 | $\frac{733.4_{g7}^{21}}{692_{j6}}$ | $\frac{692.2^{21}}{645}$ | 24 | 12 | 21 | 7.0 | 1.7 | 2LC0200-8AB2 | 2LC0200-8AJ2 | 200 |
| | | | | | | | | | | | | | | | 10 | 26 | 6.0 | | 2LC0200-8AB1 | 2LC0200-8AJ1 | 190 |
| 690 | 28000 | 1200 | 1650 | 110 | 200 | 690 | 278 | 220 | 130 | 102 | 350 | $\frac{890_{g7}^{21}}{800_{j6}}$ | $\frac{850^{21}}{750}$ | 24 | 32 | 17 | 15 | 3.7 | 2LC0201-0AB2 | 2LC0201-0AJ2 | 270 |
| | | | | | | | | | | | | | | | 12 | 26 | 11 | | 2LC0201-0AB1 | 2LC0201-0AJ1 | 250 |
| 840 | 45000 | 1000 | 1350 | 140 | 240 | 840 | 340 | 280 | 115 | 105 | 395 | $\frac{1105_{g7}^{21}}{960_{j6}}$ | $\frac{1060^{21}}{908}$ | 30 | 32 | 21 | 46 | 11 | 2LC0201-1AB2 | 2LC0201-1AJ2 | 530 |
| | | | | | | | | | | | | | | | 16 | 30 | 32 | | 2LC0201-1AB1 | 2LC0201-1AJ1 | 470 |
| 970 | 90000 | 850 | 1180 | 160 | 280 | 970 | 390 | 350 | 155 | 137 | 505 | $\frac{1385_{g7}^{21}}{1112_{j6}}$ | $\frac{1320^{21}}{1051}$ | 35 | 24 | 31 | 130 | 26 | 2LC0201-2AB2 | 2LC0201-2AJ2 | 1050 |
| | | | | | | | | | | | | | | | 16 | 35 | 76 | | 2LC0201-2AB1 | 2LC0201-2AJ1 | 920 |

Configurable variants ¹⁾

- ØD2 Without finished bore
With finished bore

Notes

- The hub diameter of the component part is assigned according to the diameter of the finished bore. Where bore diameters overlap, the component with the smaller hub diameter is always selected.
- Weights and mass moments of inertia apply to cast iron version with maximum bore.
- From size 500, the bores D1 and D2 are each provided with a recess of D = +1 mm halfway along the hub. $V \approx 1/3 NL$.
- Notice: The application factor FB in the coupling selection Page 12/5 section must be noted.

Ordering example


- ELPEX EFG coupling, size 430, steel version
- Bore ØD1 = 100H7 mm with keyway to DIN 6885 and set screw, flange to SAE J620d size 21 with DFA = 673.5g7 mm
- Coupling balanced G6.3 in accordance with the half parallel key standard.

Article no.: 2LC0200-6AJ29-0AA0-ZM1N+W02

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.
²⁾ The upper line for the flange connection dimensions complies with standard SAE J620d or DIN 6288.
 ↗ For online configuration on flender.com, click on the item no.

TYPES EFGS

with fail-safe device

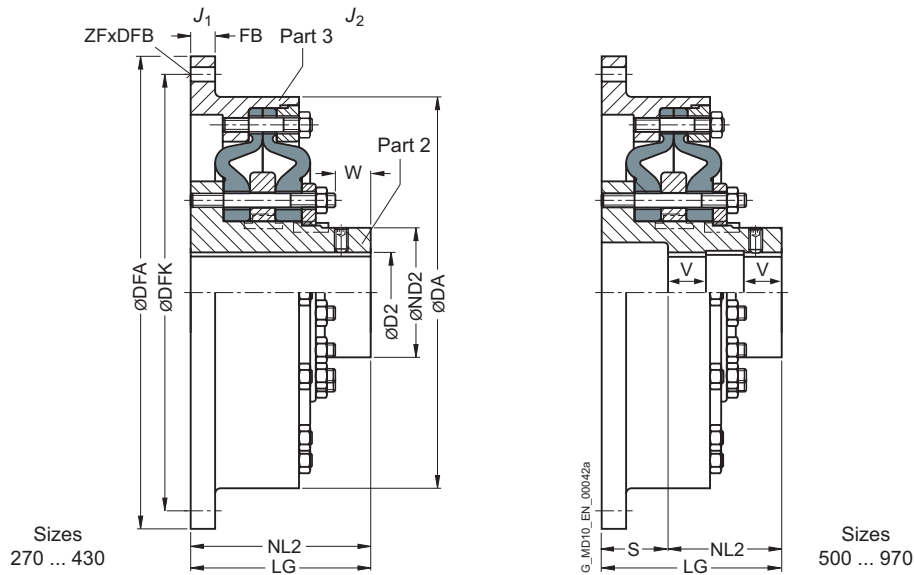

| Size | Rated torque T_{KN} Nm | Maximum speed | | Dimensions in mm | | | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | | Weight m kg | | | |
|------|--------------------------------|-------------------|-------|---|-----|-----|-----|-----|-----|----|--|-----------------------------------|---------------------|------------------------|-----|---------------------------|---------------------------|---------------------|--------------|--------------|-------|
| | | Type Cast iron | Steel | D2 Keyway DIN 6885 min. max. | DA | ND2 | NL2 | S | W | LG | Flange connection dimensions ²⁾ | | | | | J_1 kgm ² | J_2 kgm ² | | Type | Cast iron | Steel |
| | | | | | | | | | | | DFA | DFK | FB | ZF | DFB | | | | | | |
| 270 | 1600 | 3000 | 4250 | 45 | 70 | 270 | 94 | 155 | - | 42 | 155 | 466.7 ₉₇ ²⁾ | 438.2 ²⁾ | 12 | 8 | 13 | 0.47 | 0.037 | 2LC0200-3AC2 | 2LC0200-3AK2 | 27 |
| | | | | | | | | | | | | 325 ₆ | 300 | | 8 | 14 | 0.16 | | 2LC0200-3AC1 | 2LC0200-3AK1 | 19 |
| 320 | 2800 | 2500 | 3600 | 55 | 85 | 320 | 115 | 180 | - | 48 | 180 | 517.5 ₉₇ ²⁾ | 489 ²⁾ | 14 | 8 | 13 | 0.87 | 0.082 | 2LC0200-4AC2 | 2LC0200-4AK2 | 42 |
| | | | | | | | | | | | | 392 ₆ | 360 | | 8 | 18 | 0.39 | | 2LC0200-4AC1 | 2LC0200-4AK1 | 33.5 |
| 375 | 4500 | 2100 | 3100 | 65 | 105 | 375 | 143 | 205 | - | 62 | 205 | 571.5 ₉₇ ²⁾ | 542.9 ²⁾ | 16 | 6 | 17 | 1.5 | 0.21 | 2LC0200-5AC2 | 2LC0200-5AK2 | 65 |
| | | | | | | | | | | | | 448 ₆ | 415 | | 8 | 18 | 0.78 | | 2LC0200-5AC1 | 2LC0200-5AK1 | 53 |
| 430 | 7100 | 1900 | 2650 | 75 | 120 | 430 | 165 | 235 | - | 68 | 235 | 673.1 ₉₇ ²⁾ | 641.4 ²⁾ | 20 | 12 | 17 | 3.4 | 0.37 | 2LC0200-6AC2 | 2LC0200-6AK2 | 100 |
| | | | | | | | | | | | | 515 ₆ | 475 | | 8 | 22 | 1.5 | | 2LC0200-6AC1 | 2LC0200-6AK1 | 78 |
| 500 | 11200 | 1600 | 2300 | 90 | 150 | 500 | 202 | 160 | 100 | 80 | 260 | 673.1 ₉₇ ²⁾ | 641.4 ²⁾ | 20 | 12 | 17 | 4.0 | 0.85 | 2LC0200-7AC2 | 2LC0200-7AK2 | 150 |
| | | | | | | | | | | | | 585 ₆ | 545 | | 10 | 22 | 2.7 | | 2LC0200-7AC1 | 2LC0200-7AK1 | 140 |

Configurable variants ¹⁾

- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

²⁾ The upper line for the flange connection dimensions complies with standard SAE J620d or DIN 6288.

↗ For online configuration on flender.com, click on the item no.

| Size | Rated torque T_{KN} Nm | Maximum speed | | Dimensions in mm | | | | | | | | | | Mass moment of inertia | | Article no. ¹⁾ | | Weight m kg | | | |
|------|--------------------------------|--------------------------------|----------------------------|---|-----|-----|-----|-----|-----|-----|--|-----------------------------------|---------------------|------------------------|-----|---------------------------|---------------------------|---------------------|--------------|--------------|-------|
| | | Cast iron n_{Kmax} rpm | Steel n_{Kmax} rpm | D2 Keyway DIN 6885 min. max. | DA | ND2 | NL2 | S | W | LG | Flange connection dimensions ²⁾ | | | | | J_1 kgm ² | J_2 kgm ² | | Type | Cast iron | Steel |
| | | | | | | | | | | | DFA | DFK | FB | ZF | DFB | | | | | | |
| 590 | 18000 | 1350 | 2000 | 100 | 170 | 590 | 230 | 190 | 120 | 95 | 310 | 733.4 _{g7} ²⁾ | 692.2 ²⁾ | 24 | 12 | 21 | 7.0 | 1.7 | 2LC0200-8AC2 | 2LC0200-8AK2 | 200 |
| | | | | | | | | | | | | 692 _{g6} | 645 | | 10 | 26 | 6.0 | | 2LC0200-8AC1 | 2LC0200-8AK1 | 190 |
| 690 | 28000 | 1200 | 1650 | 110 | 200 | 690 | 278 | 220 | 130 | 102 | 350 | 890 _{g7} ²⁾ | 850 ²⁾ | 24 | 32 | 17 | 15 | 3.7 | 2LC0201-0AC2 | 2LC0201-0AK2 | 270 |
| | | | | | | | | | | | | 800 _{g6} | 750 | | 12 | 26 | 11 | | 2LC0201-0AC1 | 2LC0201-0AK1 | 250 |
| 840 | 45000 | 1000 | 1350 | 140 | 240 | 840 | 340 | 280 | 115 | 105 | 395 | 1105 _{g7} ²⁾ | 1060 ²⁾ | 30 | 32 | 21 | 46 | 11 | 2LC0201-1AC2 | 2LC0201-1AK2 | 530 |
| | | | | | | | | | | | | 960 _{g6} | 908 | | 16 | 30 | 32 | | 2LC0201-1AC1 | 2LC0201-1AK1 | 470 |
| 970 | 90000 | 850 | 1180 | 160 | 280 | 970 | 390 | 350 | 155 | 137 | 505 | 1385 _{g7} ²⁾ | 1320 ²⁾ | 35 | 24 | 31 | 130 | 26 | 2LC0201-2AC2 | 2LC0201-2AK2 | 1050 |
| | | | | | | | | | | | | 1112 _{g6} | 1051 | | 16 | 35 | 76 | | 2LC0201-2AC1 | 2LC0201-2AK1 | 920 |

Configurable variants ¹⁾

- ØD2 Without finished bore
With finished bore

Notes

- The hub diameter of the component part is assigned according to the diameter of the finished bore. Where bore diameters overlap, the component with the smaller hub diameter is always selected.
- Weights and mass moments of inertia apply to cast iron version with maximum bore.
- From size 500, the bores D1 and D2 are each provided with a recess of D = +1 mm halfway along the hub. $V \approx 1/3 NL$.
- Notice: The application factor FB in the coupling selection Page 12/5 section must be noted.

Ordering example

- ELPEX EFGS coupling, size 430, steel version
- Bore ØD1 = 100H7 mm with keyway to DIN 6885 and set screw, flange to SAE J620d size 21 with DFA = 673.5g7 mm
- Coupling balanced G6.3 in accordance with the half parallel key standard.

Article no.: 2LC0200-6AK29-0AA0-Z M1N+W02

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.
²⁾ The upper line for the flange connection dimensions complies with standard SAE J620d or DIN 6288.
 ↗ For online configuration on flender.com, click on the item no.

SPARE AND WEAR PARTS

Flexible rings

| Size | ➤ Article no. set of flexible rings for a coupling | Weight kg |
|------|---|--------------|
| 270 | 2LC0200-3XV00-0AA0 | 1.6 |
| 320 | 2LC0200-4XV00-0AA0 | 2.6 |
| 375 | 2LC0200-5XV00-0AA0 | 4.4 |
| 430 | 2LC0200-6XV00-0AA0 | 6.8 |
| 500 | 2LC0200-7XV00-0AA0 | 9.4 |
| 590 | 2LC0200-8XV00-0AA0 | 18 |
| 690 | 2LC0201-0XV00-0AA0 | 36 |
| 840 | 2LC0201-1XV00-0AA0 | 68 |
| 970 | 2LC0201-2XV00-0AA0 | 120 |

Note

- The flexible rings are wear parts. The service life depends on the operating conditions.

Flexible ring screw connection

| Size | ➤ Article no. set of pins and bolts | |
|------|-------------------------------------|--------------------|
| | Type EFG, ENG | EFGS, ENGS |
| 270 | 2LC0200-3XU00-0AA0 | 2LC0200-3XW00-0AA0 |
| 320 | 2LC0200-4XU00-0AA0 | 2LC0200-4XW00-0AA0 |
| 375 | 2LC0200-5XU00-0AA0 | 2LC0200-5XW00-0AA0 |
| 430 | 2LC0200-6XU00-0AA0 | 2LC0200-6XW00-0AA0 |
| 500 | 2LC0200-7XU00-0AA0 | 2LC0200-7XW00-0AA0 |
| 590 | 2LC0200-8XU00-0AA0 | 2LC0200-8XW00-0AA0 |
| 690 | 2LC0201-0XU00-0AA0 | 2LC0201-0XW00-0AA0 |
| 840 | 2LC0201-1XU00-0AA0 | 2LC0201-1XW00-0AA0 |
| 970 | 2LC0201-2XU00-0AA0 | 2LC0201-2XW00-0AA0 |

APPENDIX

| | |
|---|------------|
| Fits | A/2 |
| Fitting recommendations | A/2 |
| Deviation table to DIN ISO 286 | A/2 |
| Cylindrical shaft ends, extract from DIN 748 Part 1 (long) | A/3 |
| Central holes according to DIN 332 Part 2 | A/3 |
| ----- | |
| Parallel key connections to DIN 6885-1 | A/4 |
| ----- | |
| Related catalogs | A/6 |
| ----- | |
| Suitable gear solutions | A/9 |
| ----- | |

FITS

Fitting recommendations

For many applications, the fit assignment m6/H7 is especially suitable.

| Description | Application | Shaft tolerance | Bore tolerance | |
|---|--|--|----------------|----|
| Sliding fit with parallel key connection not suitable for reversing operation | For steel and cast hubs | j6 | H7 | |
| | | h6 | J7 | |
| Press fit with parallel key connection not suitable for reversing operation | For steel and cast hubs | h6 | K7 | |
| | | k6 | H7 | |
| Interference fit with parallel key connection suitable for reversing operation | For steel and cast hubs | m6 | H7 | |
| | | n6 | H7 | |
| | | h6 | M7 | |
| | | Only for steel hubs | h6 | P7 |
| | | Preferred for ZAPEX and ARPEX coupling series. | k6 | M7 |
| | | m6 | K7 | |
| | | n6 | J7 | |
| | | p6 | H7 | |
| Shrink fit connection without parallel key | Only for steel hubs The permitted hub tension must be urgently checked. | s6 | F7 | |
| | | u6 | H6 | |
| | | v6 | H6 | |
| | | x6 | H6 | |

Deviation table to DIN ISO 286 for above-mentioned fits for bore diameters from 10 mm to 250 mm


| Bore diameter above | up to | Deviations in µm | | | | | | | | | | | |
|------------------------|-------|------------------|-----|-----|-----|-----|-----|-------|-----|-----|-----|-----|-----|
| | | Bore | | | | | | Shaft | | | | | |
| | | F7 | H7 | J7 | K7 | M7 | P7 | h6 | j6 | k6 | m6 | n6 | p6 |
| 10 | 18 | +34 | +18 | +10 | +6 | 0 | -11 | 0 | +8 | +12 | +18 | +23 | +29 |
| | | +16 | 0 | -8 | -12 | -18 | -29 | -11 | -3 | +1 | +7 | +12 | +18 |
| 18 | 30 | +41 | +21 | +12 | +6 | 0 | -14 | 0 | +9 | +15 | +21 | +28 | +35 |
| | | +20 | 0 | -9 | -15 | -21 | -35 | -13 | -4 | +2 | +8 | +15 | +22 |
| 30 | 50 | +50 | +25 | +14 | +7 | 0 | -17 | 0 | +11 | +18 | +25 | +33 | +42 |
| | | +25 | 0 | -11 | -18 | -25 | -42 | -16 | -5 | +2 | +9 | +17 | +26 |
| 50 | 80 | +60 | +30 | +18 | +9 | 0 | -21 | 0 | +12 | +21 | +30 | +39 | +51 |
| | | +30 | 0 | -12 | -21 | -30 | -51 | -19 | -7 | +2 | +11 | +20 | +32 |
| 80 | 120 | +71 | +35 | +22 | +10 | 0 | -24 | 0 | +13 | +25 | +35 | +45 | +59 |
| | | +36 | 0 | -13 | -25 | -35 | -59 | -22 | -9 | +3 | +13 | +23 | +37 |
| 120 | 180 | +83 | +40 | +26 | +12 | 0 | -28 | 0 | +14 | +28 | +40 | +52 | +68 |
| | | +43 | 0 | -14 | -28 | -40 | -68 | -25 | -11 | +3 | +15 | +27 | +43 |
| 180 | 250 | +96 | +46 | +30 | +13 | 0 | -33 | 0 | +16 | +33 | +46 | +60 | +79 |
| | | +50 | 0 | -16 | -33 | -46 | -79 | -29 | -13 | +4 | +17 | +31 | +50 |

A

Cylindrical shaft ends, extract from DIN 748 Part 1 (long)

| | Diameter in mm | | | | | | | | | | | | | | | | | | | | | |
|--------------------|----------------|----|----|----|----|----|----|-----|----|----|----|----|----|-----|----|----|----|-----|----|----|----|-----|
| | 24 | 25 | 28 | 30 | 32 | 35 | 38 | 40 | 42 | 45 | 48 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 |
| ISO tolerance zone | k6 | | | | | | | | | | | | m6 | | | | | | | | | |
| End length in mm | 50 | 60 | 80 | | | | | 110 | | | | | | 140 | | | | 170 | | | | 210 |

Central holes according to DIN 332 Part 2

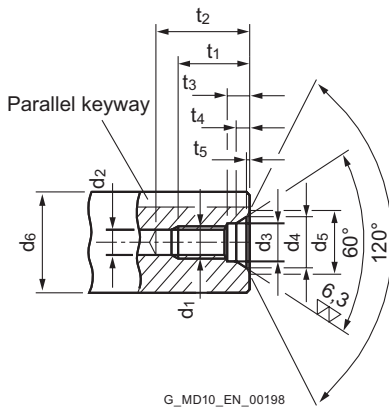

Form DS (with thread) DIN 332/2

| Recommended diameter ranges d_6 ¹⁾ | | DS form dimensions | | | | | | | | | | |
|---|-------|--------------------|---------------------|-------|-------|-------|---------------------|-----------------------|---------------------|--------------------------|--------------------------|--|
| above | up to | d_1 | d_2 ²⁾ | d_3 | d_4 | d_5 | t_1 ₊₂ | t_2 _{min.} | t_3 ₊₁ | t_4 _{approx.} | t_5 _{approx.} | |
| 7 | 10 | M3 | 2.5 | 3.2 | 5.3 | 5.8 | 9 | 12 | 2.6 | 1.8 | 0.2 | |
| 10 | 13 | M4 | 3.3 | 4.3 | 6.7 | 7.4 | 10 | 14 | 3.2 | 2.1 | 0.3 | |
| 13 | 16 | M5 | 4.2 | 5.3 | 8.1 | 8.8 | 12.5 | 17 | 4 | 2.4 | 0.3 | |
| 16 | 21 | M6 | 5 | 6.4 | 9.6 | 10.5 | 16 | 21 | 5 | 2.8 | 0.4 | |
| 21 | 24 | M8 | 6.8 | 8.4 | 12.2 | 13.2 | 19 | 25 | 6 | 3.3 | 0.4 | |
| 24 | 30 | M10 | 8.5 | 10.5 | 14.9 | 16.3 | 22 | 30 | 7.5 | 3.8 | 0.6 | |
| 30 | 38 | M12 | 10.2 | 13 | 18.1 | 19.8 | 28 | 37 | 9.5 | 4.4 | 0.7 | |
| 38 | 50 | M16 | 14 | 17 | 23 | 25.3 | 36 | 45 | 12 | 5.2 | 1.0 | |
| 50 | 85 | M20 | 17.5 | 21 | 28.4 | 31.3 | 42 | 53 | 15 | 6.4 | 1.3 | |
| 85 | 130 | M24 | 21 | 25 | 34.2 | 38 | 50 | 63 | 18 | 8 | 1.6 | |
| 130 | 225 | M30 ³⁾ | 26.5 | 31 | 40.2 | 44.6 | 60 | 77 | 22 | 8 | 1.9 | |
| 225 | 320 | M36 ³⁾ | 32 | 37 | 49.7 | 55 | 74 | 93 | 22 | 11 | 2.3 | |
| 320 | 500 | M42 ³⁾ | 37.5 | 43 | 60.3 | 66.6 | 84 | 105 | 26 | 15 | 2.7 | |


¹⁾ Diameter refers to the finished workpiece

²⁾ Tap hole drill diameter according to DIN 336 Part 1

³⁾ Dimensions not acc. to DIN 332 Part 2

A

PARALLEL KEY CONNECTIONS TO DIN 6885-1

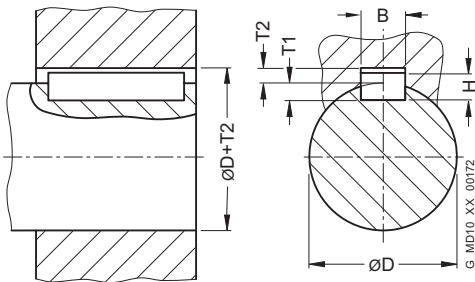

For moderate operating conditions, the hub keyway tolerance JS9 is recommended.

In harsh operating conditions or during reversing operation, the keyway width tolerance P9 must be preferred.

With two parallel keyways, the keyway width tolerance JS9 should be specified in order to simplify the assembly.

The shaft keyway width has to be specified with the tolerance N9.

| Diameter above D mm | up to mm | Keyway width B mm | Parallel key height H mm | Shaft keyway depth T1 mm | Hub keyway depth T2 mm | Deviation for shaft and hub keyway depth mm | Deviation table for keyway width B | |
|------------------------------|-------------|-------------------------|-----------------------------------|-----------------------------------|---------------------------------|---|---------------------------------------|------------|
| | | | | | | | JS9 µm | P9 µm |
| | 10 | 3 | 3 | 1.8 | 1.4 | +0.1 | +12.5 -12.5 | -6 -31 |
| 10 | 12 | 4 | 4 | 2.5 | 1.8 | +0.1 | +15 -15 | -12 -42 |
| 12 | 17 | 5 | 5 | 3 | 2.3 | +0.1 | +15 -15 | -12 -42 |
| 17 | 22 | 6 | 6 | 3.5 | 2.8 | +0.1 | +15 -15 | -12 -42 |
| 22 | 30 | 8 | 7 | 4 | 3.3 | +0.2 | +18 -18 | -15 -51 |
| 30 | 38 | 10 | 8 | 5 | 3.3 | +0.2 | +18 -18 | -15 -51 |
| 38 | 44 | 12 | 8 | 5 | 3.3 | +0.2 | +21.5 -21.5 | -18 -61 |
| 44 | 50 | 14 | 9 | 5.5 | 3.8 | +0.2 | +21.5 -21.5 | -18 -61 |
| 50 | 58 | 16 | 10 | 6 | 4.3 | +0.2 | +21.5 -21.5 | -18 -61 |
| 58 | 65 | 18 | 11 | 7 | 4.4 | +0.2 | +21.5 -21.5 | -18 -61 |
| 65 | 75 | 20 | 12 | 7.5 | 4.9 | +0.2 | +26 -26 | -22 -74 |
| 75 | 85 | 22 | 14 | 9 | 5.4 | +0.2 | +26 -26 | -22 -74 |
| 85 | 95 | 25 | 14 | 9 | 5.4 | +0.2 | +26 -26 | -22 -74 |

A

| Diameter | | Keyway width B mm | Parallel key height H mm | Shaft keyway depth | | Hub keyway depth T2 mm | Deviation for shaft and hub keyway depth mm | Deviation table for keyway width B | |
|------------------|-------------|-------------------------|-----------------------------------|-----------------------|----------|---------------------------------|---|---------------------------------------|----------|
| above D mm | up to mm | | | T1 mm | T2 mm | | | JS9 µm | P9 µm |
| 95 | 110 | 28 | 16 | 10 | 6.4 | +0.2 | +26 -26 | -22 -74 | |
| 110 | 130 | 32 | 18 | 11 | 7.4 | +0.2 | +31 -31 | -26 -88 | |
| 130 | 150 | 36 | 20 | 12 | 8.4 | +0.3 | +31 -31 | -26 -88 | |
| 150 | 170 | 40 | 22 | 13 | 9.4 | +0.3 | +31 -31 | -26 -88 | |
| 170 | 200 | 45 | 25 | 15 | 10.4 | +0.3 | +31 -31 | -26 -88 | |
| 200 | 230 | 50 | 28 | 17 | 11.4 | +0.3 | +31 -31 | -26 -88 | |
| 230 | 260 | 56 | 32 | 20 | 12.4 | +0.3 | +37 -37 | -32 -106 | |
| 260 | 290 | 63 | 32 | 20 | 12.4 | +0.3 | +37 -37 | -32 -106 | |
| 290 | 330 | 70 | 36 | 22 | 14.4 | +0.3 | +37 -37 | -32 -106 | |
| 330 | 380 | 80 | 40 | 25 | 15.4 | +0.3 | +37 -37 | -32 -106 | |
| 380 | 440 | 90 | 45 | 28 | 17.4 | +0.3 | +43.5 -43.5 | -37 -124 | |
| 440 | 500 | 100 | 50 | 31 | 19.4 | +0.3 | +43.5 -43.5 | -37 -124 | |



RELATED CATALOGS


Torsionally Rigid Couplings

FLE 10.1
FLEX-C10001-00-7600



ARPEX

High Performance Couplings
MD 10.2
PDMD-C10146-00



Flexible Couplings

FLE 10.2
FLEX-C10002-00-7600



SIPEX and BIPEX-S

Backlash-free couplings
MD 10.3
PDMD-C10145-00




Highly Flexible Couplings

FLE 10.3
FLEX-C10003-00-7600



ARPEX

Composite Couplings
MD 10.5
PDMD-C10153-00



Fluid Couplings

FLE 10.4
FLEX-C10004-00-7600



ARPEX

Safety couplings
MD 10.11
PDMD-C10147-00



FLENDER SIP

Standard Industrial Planetary Gear Units

MD 31.1


PDMD-C10154-00

**FLENDER CHG**

Helical Gear Units

MD 20.10

PDMD-C10155-00

**Gear units**

Fast Track

MD 20.12

PDMD-C10156-00

**Bucket Elevator Drives**

MD 20.2

PDMD-C10157-00

**PLANUREX 2**

Planetary Gear Units

MD 20.3

PDMD-C10158-00

**Paper Machine Drives**


MD 20.5

PDMD-C10159-00

**Conveyor Belt Drives**

MD 20.6

PDMD-C10160-00

**Marine Reduction Gearboxes**

MD 20.7


PDMD-C10161-00

**DUORED 2**

Helical Gear Units, Load-sharing

MD 20.8

PDMD-C10162-00

**Pinion Drive for Tube Mills**

MD 20.9

PDMD-C10163-00






THE RIGHT GEAR UNIT SOLUTION FOR ANY REQUIREMENT

We provide helical and planetary gear units made up of standard modules or as a complete application solution.


Helical and planetary gear units from Flender are modern drive solutions that satisfy the most varying and extreme demands, day after day and year after year. For decades, plant operators have been achieving high system reliability and low lifecycle costs in every conceivable industry with our helical gear units.

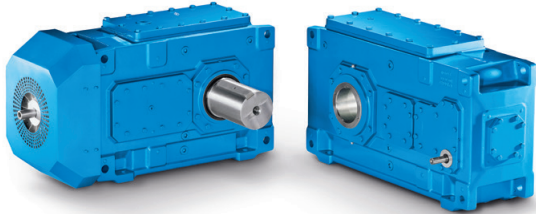

Helical and bevel helical gear units

Flender helical and bevel helical gear units are by far the most comprehensive range of industrial gear units in the world. It ranges from a multi-faceted universal gear unit portfolio and application-specific gear units to customer-specific solutions.


Rated torque: 3,300 Nm ... 1,400,000 Nm

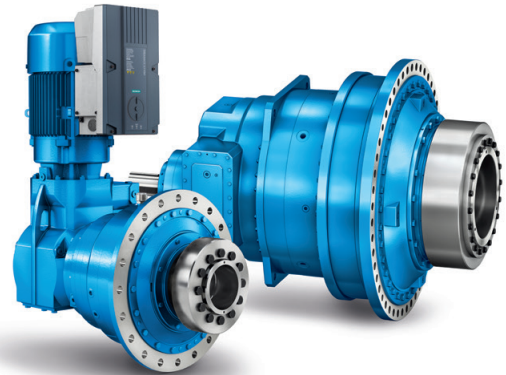

Planetary Gear Units

With Flender planetary gear units, we provide a range of durable, reliable and finely graduated gear unit solutions. The series wins customers over due to its highly integrated planetary geared motor and maximum conformity with all international motor standards. It also brings quality and performance in a good ratio of lifecycle costs to price.

Rated torque: 10,000 Nm ... 5,450,000 Nm

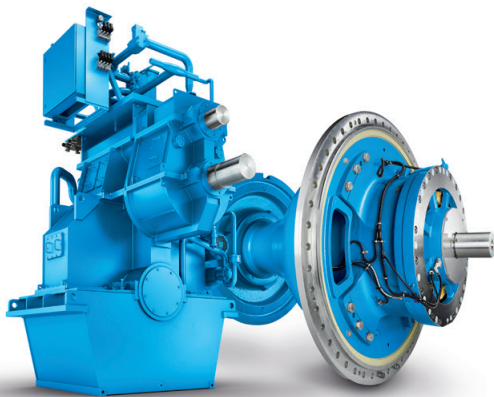

Application-specific gear units

With application-specific gear units, Flender provides by far the most application solutions and thus covers nearly every drive-related need from hundreds of applications in industry and the acquisition of raw materials.

Rated torque: up to 10,000,000 Nm



Customer-specific designs

Our experts are available at any time for special requirements during the development of new products. From designing and simulating complex drive solutions to implementing them, we work together with you to resolve multi-layered tasks.

FLENDER COUPLINGS CATALOG **FLE 10.3** EDITION 2020 EN

flender.com

Further information on the subject of couplings:

flender.com/couplings

Further information on the subject of applications:

flender.com/application-specific-gear-unit

For further information on gears:

flender.com/gearunits

Further information on the subject of service:

flender.com/services

Flender GmbH

Alfred-Flender-Straße 77

46395 Bocholt

Germany

Article no.: FLEX-C10003-00-7600

The information given in this product catalog includes descriptions and performance features that in specific applications do not always apply in the form described or may change through further-development of the products. The desired performance features are binding only if they are expressly agreed on conclusion of contract. Subject to availability for delivery and to technical changes.

flender.com